

Tehnički list za artikl: AK667813--

LS-FI (KZS), C/ 13A/30mA, 3P+N, Tip A, 6kA, serija AMPARO

N priključak s desne strane, Tip A (reagira na pojavu sinusne AC i pulsirajuće DC diferencijalne struje), Izvedba Bez vremenskog zatezanja, Norma EN 61009-1:2012 + A1:2014 + A2:2014 + A11:2015 + A12:2016, EN 61009-2-1:1994 + A11:1998, IEC 61009-1, IEC 61009-2-1




Tehnički podaci

Norma	IEC 61009-1 EN 61009-1
Tip	A (reagira na pojavu sinusne AC i pulsirajuće DC diferencijalne struje)
Izvedba	Bez vremenskog zatezanja
Nazivna osjetljivost $I_{\Delta n}$ (mA)	30
Isklopna karakteristika	C
Nazivna struja (A)	13
Nazivna struja (A)	13
Polovi	3+N
Nazivni napon	230/400 V AC
Nazivna frekvencija (Hz)	50/ 60
Klasa selektivnosti	3
Nazivna prekidna moć I_m (A)	3000


Tehnički podaci - nastavak

Nazivna prekidna moć	6 kA
Nazivna prekidna moć (kA)	6
Nazivni udarni podnosivi napon	4kV
Dielectric test voltage at ind. Frequency (V)	2000
Izolacijski napon	500 V
Maks. dozvoljeni predosigurač za zaštitu od kratkog spoja (A gG)	63
Vrijeme isklopa bez odgode	≤0,1 s
Disipacija snage (W)	6, 14
Stupanj zagađenja	2
Životni vijek, električni	2000 Operations
Životni vijek, mehanički	10000 radnih ciklusa
Prikaz postavki kontakta	Yes
IP stupanj zaštite	IP20
Presjek stezaljke (mm²)	1-25
Veličina stezaljke za sabirnicu	10 mm²
Materijal vodiča	Copper
Zakretni moment	2 Nm
Napajanje	two-sided
Tip stezaljke	Double function clamp / pin and fork busbar
Referentna temperatura (°C)	30
Temperatura okoline (otvoren) (°C)	-25°C bis +70
Način montaže	On DIN rail according to EN 60715 (35mm) via quick mounting clip
Dodatni pribor	AM900099--;BSB90121--;BSB90122--
Serijski	AMPARO

Circuit diagram

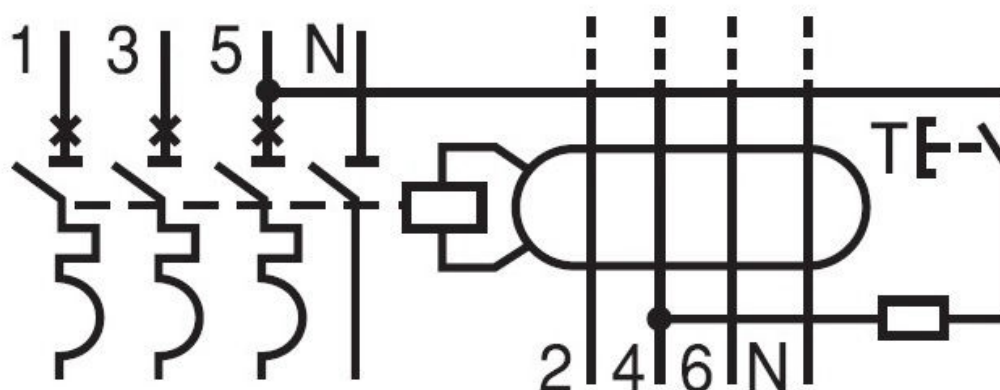


Dimensions

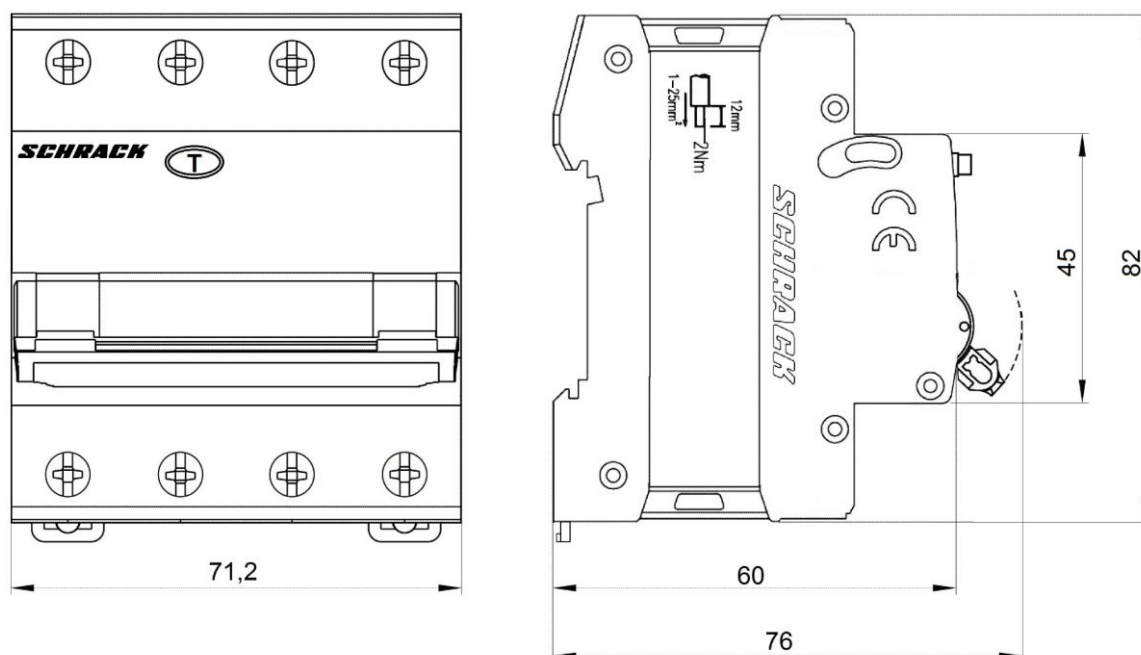


Tripping characteristic according to IEC 60898

Kennlinie C

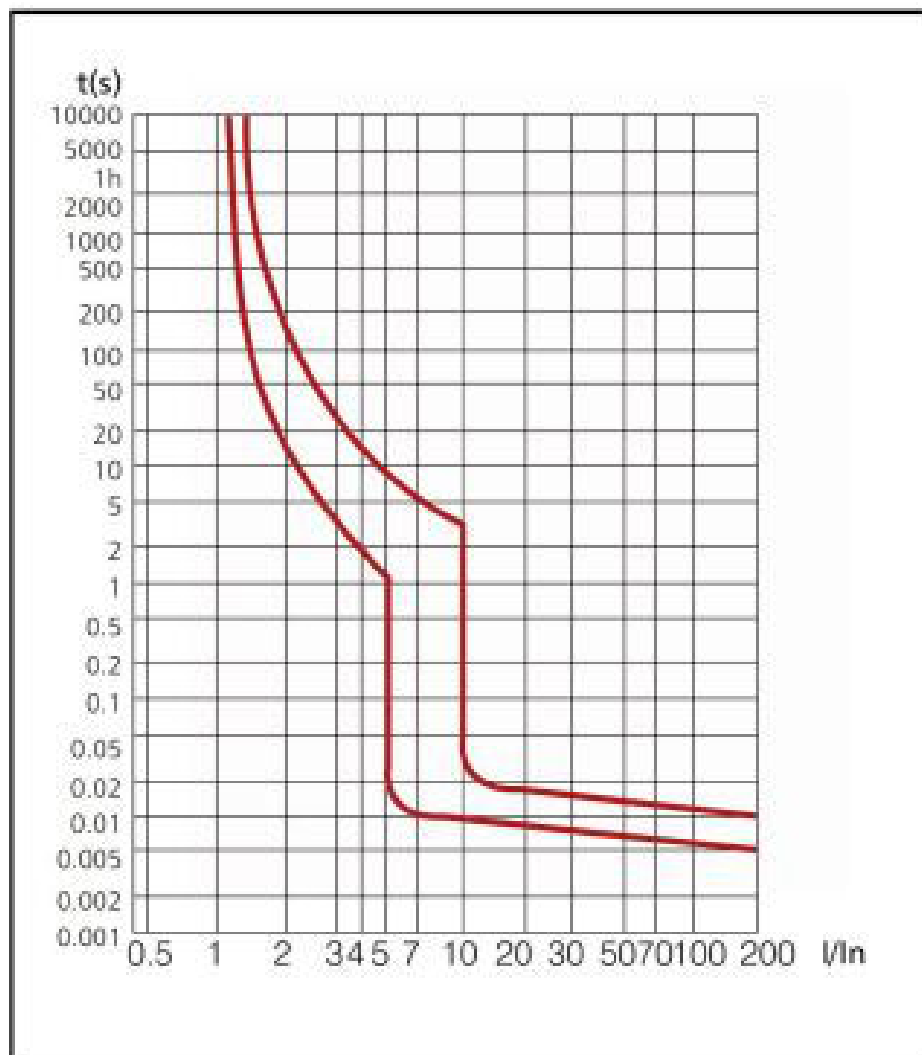


Let-through energy characteristic

Durchlassenergie I^2t

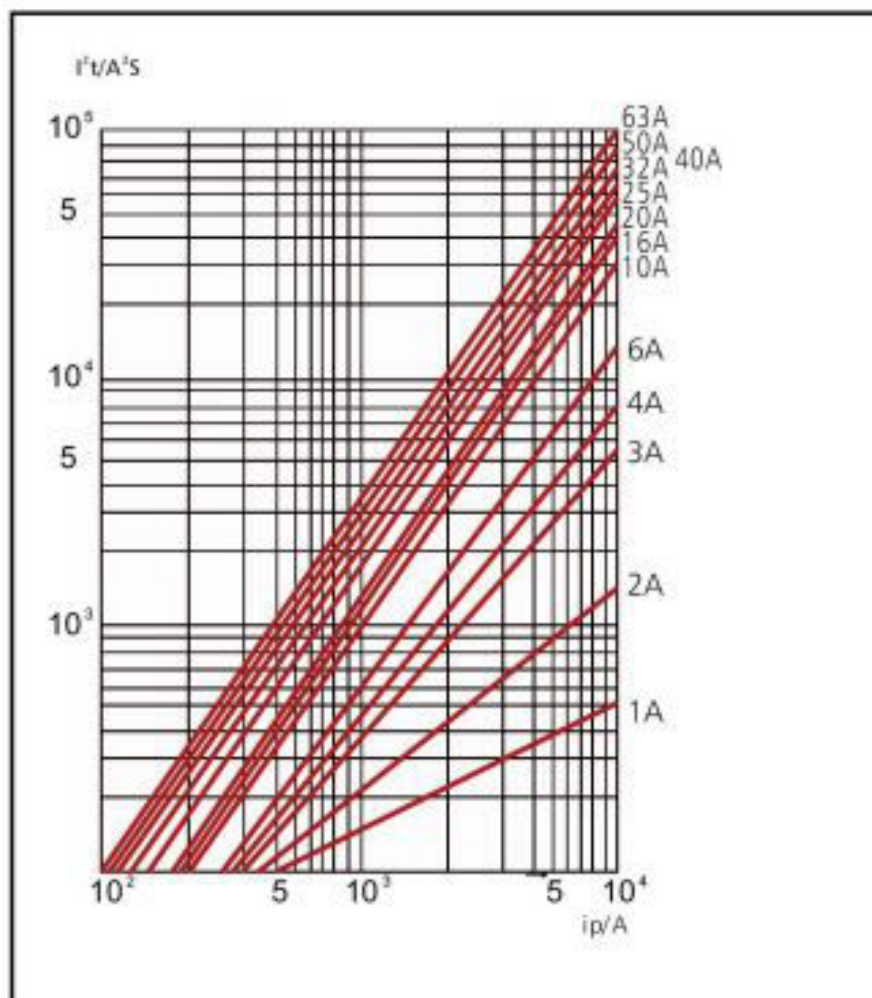

Tripping characteristic

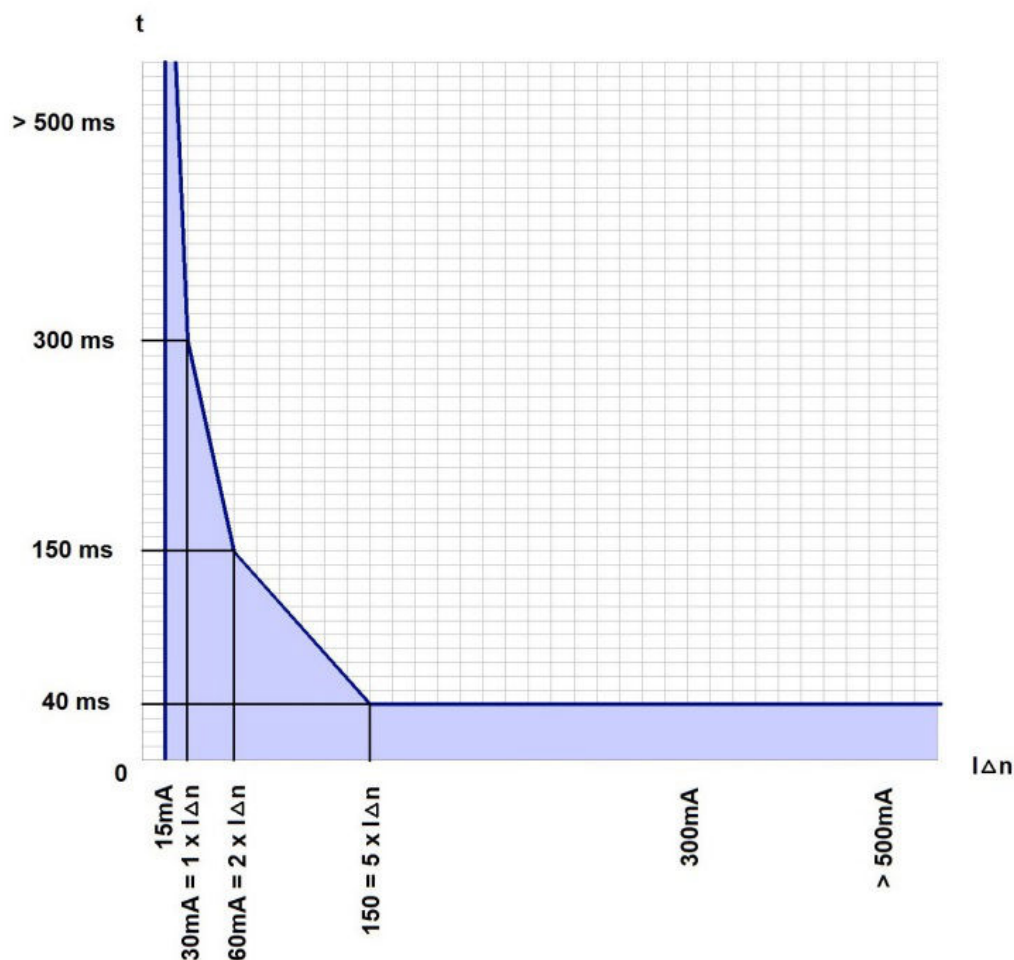

Influence of the ambient temperature on the thermal tripping behavior

I_n [A]	Ambient Temperature T [°C]								
	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	7.2	6.9	6.6	6.3	6	5.7	5.4	5.1	4.8
10	12	11.5	11	10.5	10	9.5	9	8.5	8
13	15.6	14.95	14.3	13.65	13	12.35	11.7	11.05	10.4
16	19.2	18.4	17.6	16.8	16	15.2	14.4	13.6	12.8
20	24	23	22	21	20	19	18	17	16
25	30	28.8	27.5	26.3	25	23.8	22.5	21.3	20
32	38.4	36.8	35.2	33.6	32	30.4	28.8	27.2	25.6
40	48	46	44	42	40	38	36	34	32

Short-circuit selectivity to NH fuses with characteristic curve gG/gL

Short-circuit selectivity **Characteristic B** of fuse insert

	NH-00 gL/gG								
I_n [A]	20	25	36	50	63	80	100	125	160
6	0.5 kA	0.8 kA	1.9 kA	2.5 kA	4.5 kA	5 kA	6 kA	6 kA	6 kA
10		0.7 kA	1.4 kA	2.2 kA	3.2 kA	3.6 kA	6 kA	6 kA	6 kA
16			1.2 kA	1.8 kA	2.6 kA	3 kA	5.6 kA	6 kA	6 kA
20				1.5 kA	2.2 kA	2.5 kA	4.6 kA	6 kA	6 kA
25				1.3 kA	2 kA	2.2 kA	4.1 kA	5.5 kA	6 kA

Short-circuit selectivity **Characteristic C** of fuse insert

	NH-00 gL/gG								
I_n [A]	20	25	36	50	63	80	100	125	160
6	0.5 kA	0.8 kA	1.9 kA	2.5 kA	4.5 kA	5 kA	6 kA	6 kA	6 kA
10		0.7 kA	1.4 kA	2.2 kA	3.2 kA	3.6 kA	6 kA	6 kA	6 kA
16			1.2 kA	1.8 kA	2.6 kA	3 kA	5.6 kA	6 kA	6 kA
20				1.5 kA	2.2 kA	2.5 kA	4.6 kA	6 kA	6 kA
25				1.3 kA	2 kA	2.2 kA	4.1 kA	5.5 kA	6 kA

Short-circuit selectivity to circuit breaker size 1

Short-circuit selectivity **Kennlinie B** of fuse insert

	MC1				
I_n [A]	40	50	63	80	100
6	1.2 kA	2 kA	2.5 kA	3 kA	5 kA
10	1.2 kA	1.5 kA	2 kA	2 kA	4 kA
16	1 kA	1.2 kA	1.5 kA	2 kA	3 kA
20	0.8 kA	1.2 kA	1.5 kA	1.5 kA	3 kA
25	0.7 kA	1.2 kA	1.5 kA	1.5 kA	3 kA

Short-circuit selectivity **Kennlinie C** of fuse insert

	MC1				
I_n [A]	40	50	63	80	100
6	1.2 kA	2 kA	2.5 kA	3 kA	5 kA
10	1.2 kA	1.5 kA	2 kA	2 kA	4 kA
16	1 kA	1.2 kA	1.5 kA	2 kA	3 kA
20	0.8 kA	1.2 kA	1.5 kA	1.5 kA	3 kA
25	0.7 kA	1.2 kA	1.5 kA	1.5 kA	3 kA

Short-circuit selectivity to circuit breaker size 2

Short-circuit selectivity **Kennlinie B** to circuit breaker

	MC2				
I_n [A]	40	50	63	80	100
6	1.2 kA	1.5 kA	2.5 kA	3 kA	6 kA
10	1 kA	1.5 kA	2.5 kA	3 kA	6 kA
13	1 kA	1.2 kA	2 kA	3 kA	6 kA
16	1 kA	1.2 kA	1.5 kA	2.5 kA	6 kA
20	1 kA	1.2 kA	1.5 kA	2 kA	6 kA
25	0.8 kA	1 kA	1.5 kA	2 kA	6 kA

Short-circuit selectivity **Kennlinie C** to circuit breaker

	MC2				
I_n [A]	40	50	63	80	100
6	1.2 kA	1.5 kA	2.5 kA	3 kA	6 kA
10	1 kA	1.5 kA	2.5 kA	3 kA	6 kA
13	1 kA	1.2 kA	2 kA	3 kA	6 kA
16	1 kA	1.2 kA	1.5 kA	2.5 kA	6 kA
20	1 kA	1.2 kA	1.5 kA	1.5 kA	6 kA
25	0.8 kA	1 kA	1.5 kA	2 kA	6 kA

Number of possible wires

Cross-section [mm ²]	Number of rigid single wire conductors					
	1	2	3	4	5	6
1	+	+	+	+	+	+
1.5	+	+	+	+	+	+
2.5	+	+	+	-	-	-
4	+	+	+	-	-	-
6	+	+	+	-	-	-

Cross-section [mm ²]	Number of rigid multi wire conductors					
	1	2	3	4	5	6
10	+	+	-	-	-	-
16	+	-	-	-	-	-
25	+	-	-	-	-	-

Cross-section [mm ²]	Number of flexible single wire conductors (without ferrule)					
	1	2	3	4	5	6
1	+	+	+	+	+	+
1.5	+	+	+	+	+	+
2.5	+	+	+	+	-	-
4	+	+	+	-	-	-
6	+	+	-	-	-	-
10	+	+	-	-	-	-
16	+	-	-	-	-	-
25	+	-	-	-	-	-

Cross-section [mm ²]	Number of flexible single wire conductors (with ferrule)					
	1	2	3	4	5	6
1	+	-	-	-	-	-
1.5	+	-	-	-	-	-
2.5	+	-	-	-	-	-
4	+	-	-	-	-	-
6	+	-	-	-	-	-
10	+	-	-	-	-	-
16	+	-	-	-	-	-
25	-	-	-	-	-	-

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
LS-FI (KZS), C/13A/30mA, 3P+N, Tip A, 6kA, serija AMPARO N priključak s desne strane, Tip A (reagira na pojavu sinusne AC i pulsirajuće DC diferencijalne struje), Izvedba Bez vremenskog zatezanja, Norma EN 61009-1:2012 + A1:2014 + A2:2014 + A11:2015 + A12:2016, EN 61009-2-1:1994 + A11:1998, IEC 61009-1, IEC 61009-2-1		AK667813
Dodatni pribor		
Pomoćni kontakt, 1 C/O kontakt, serija AMPARO, uskočna montaža Tip AM6, Norma EN 60947-5-1:2017		AM900099
Sabirnica, viličasta, 4P, L1/L2/L3/N, 10mm ² korak 17,8mm 1m Not possible to break off, shortenable on both sides, TE=17.8mm	695	BSB90121
Sabirnica, viličasta, 4P, L1/L2/L3/N, 16mm ² korak 17,8mm 1m Not possible to break off, shortenable on both sides, TE=17.8mm	825	BSB90122