

Tehnički list za artikl: HSELDA40WP

FTTH n/ž priključnica prazna za 4 niti, Š80xV28xD80mm

RAL9010 bijela, moguća montaža i na DIN nosač



SCHRACK-Info

FTTH empty outlets serve as a universal interface for fiber optic installations.

They offer a high degree of flexibility when it comes to equipping and adapting the network infrastructure.

Empty outlets are an ideal solution for organizing the fiber-optic connection efficiently and ensuring a clean, well-structured installation—especially when planning for future expansions or upgrades of the network structure.

Features

- Fiber Optic In-House-Cabling
- Offers connection options for up to 4 end devices
- The box is suitable for pre-assembled cables or for pigtails

- Flexible cable entry options
- Lid locks into place
- 2 screws, 2 dowels, and 2 shrink splice protectors included

Optional Accessories

Couplers:

- HSELSK09MR
- HSELSK09GR

Pigtails:

- HLP09M041P
- HLP09D041P

Safety information:

Avoid direct contact with light sources:

- Fiber optic cables—especially those with active light sources such as lasers (e.g., in optical communication systems)—can emit hazardous radiation that may damage the eyes.
- Never look directly into the light of a fiber optic cable, even if the light source is invisible to the naked eye.

Wear protective eyewear:

- When working with fiber optic cables, especially during tests or when using lasers, always wear safety glasses to protect your eyes from harmful radiation.

Handle cables correctly:

- Plug in and unplug cables only by holding the connector, and never pull directly on the cable.

Do not bend or crush:

- Fiber optic cables are sensitive to mechanical stress.

Protect from damage:

- Install cables in dedicated conduits or use protective materials to prevent physical damage.

Keep connectors clean:

- Fiber optic connectors must be free of dust and dirt.
- Even small particles on the connectors can significantly reduce signal quality.

Observe temperature limits:

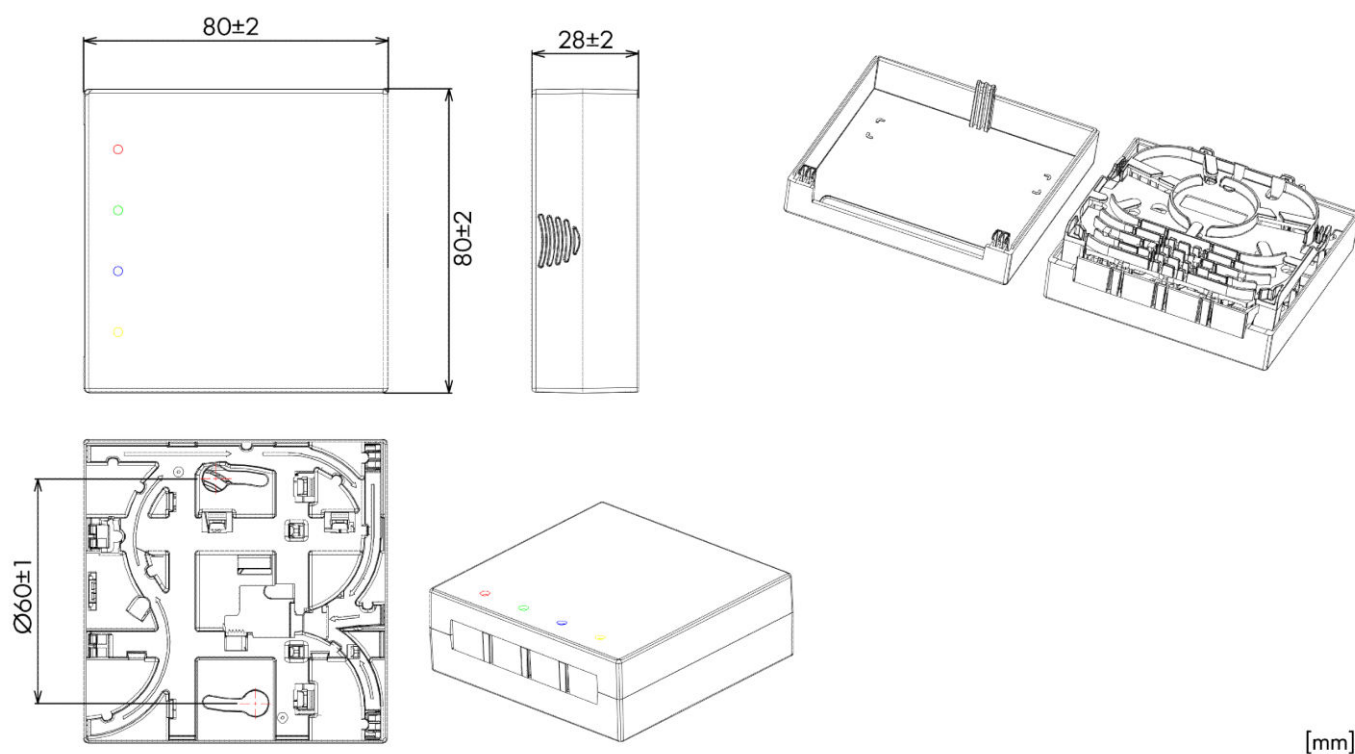
- Do not expose cables to extremely high or low temperatures.
- Follow the manufacturer's specifications for the cable's maximum operating temperature.

Inspect regularly:

- Frequently check cables for visible damage such as cracks, bends, or signs of wear.
- Damaged cables must be replaced immediately.

Tehnički podaci

Neto širina (mm)	80,00
Neto visina (mm)	28,00
Neto masa (kg)	0,05
Boja	RAL 9010 (čista bijela)
Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	75

Mjerne skice: FTTH n/ž priključnica prazna za 4 niti, Š80xV28xD80mm

Tablica artikla

OPIS	KAT. BROJ
FTTH n/ž priključnica prazna za 4 niti, Š80xV28xD80mm RAL9010 bijela, moguća montaža i na DIN nosač	HSELDA40WP
Dodatni pribor	
Optička spojnica LC/APC DX, OS2, plastična, keramik, bez prirub. bez prirubnice, protuprašni pokrov, zelena, CLASSIC	HSELSK09MR
FTTH opt. spojnica SC/APC SX, OS2, plastična, keramik protuprašni pokrov, zelena, CLASSIC	HSELSK09GR
FTTH opt. završetak LC/APC 8°, 9/125µm OS2 G657.A2, 1m, 4 kom Easy Strip, u bojama prema IEC 60304, CLASSIC	HLP09M041P
FTTH opt. završetak SC/APC 8°, 9/125µm OS2 G657.A2, 1m, 4 kom Easy Strip, u bojama prema IEC 60304, CLASSIC	HLP09D041P
Alat za čišćenje optičkih utikača LC i MU Pogodno za UPC i APC utikače. Više od 1000 ciklusa čišćenja.	HSELSZT001
Alat za čišćenje optičkih utikača SC, ST, FC i E2000 Pogodno za UPC i APC utikače. Više od 1000 ciklusa čišćenja.	HSELSZT002
Mjerač snage s integriranim laserom (VFL) za optičke spojeve PAŽNJA: ovo je izvor svjetla Laser klase 2. Nikada ne gledajte u izvor. Uvijek koristite pokrov na VFL portu kad nije u uporabi. Preporučujemo uporabu specijalnih naočala za rad s laserskim izvorima svjetla.	HSELSZT003