


Tehnički list za artikl: IL142242-A

Metering insert 2-42M compl. 6 cou. pl. front pl. st. Wien

Frontblende Stahlblech, komplett

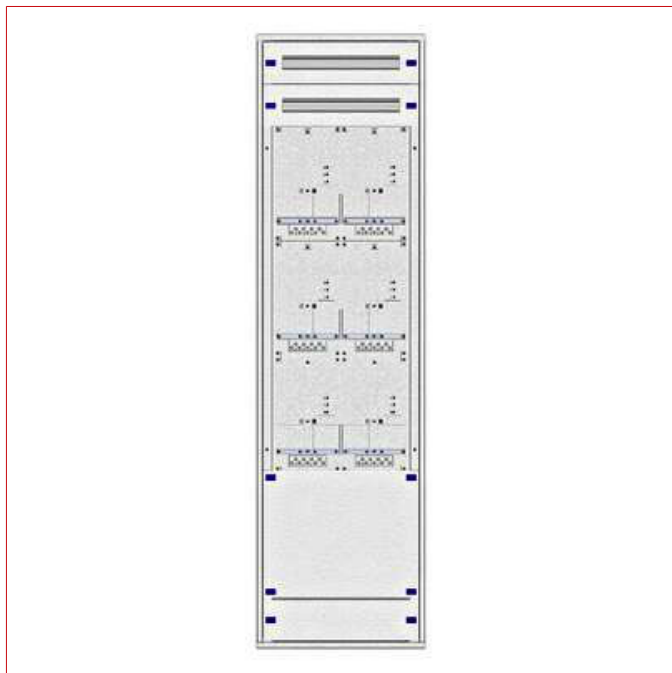

Tehnički podaci

Neto širina (mm)	500,00
Neto visina (mm)	1.935,00
Neto dubina (mm)	150,00
EAN	9004840961201
Tip	Umetak za razdjelnik s brojilom
Austrijske pokrajine	Beč
Umetci	Prednja maska metalna
Boja	RAL 7035
Širina brojila	2
Visinska jedinica	42
Redova brojila	3
Mjesta za brojila	6
Daljnji redovi	2
Pokrovna ploča	Čelik
Osnovna oznaka	Umetak

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Metering insert 2-42M compl. 6 cou. pl. front pl. st. Wien Frontblende Stahlblech, komplett		IL142242-A
Dodatni pribor		
Set za uzemljenje 300mm P/F 6mm ² , ž-z Kabel duljine 300mm; kabelski završetci, vijci, podložne pločice i matice (M6) sadržani u isporuci		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824