

Tehnički list za artikl: BK080109--

## Nazidni razdjelnik, 1-redni, 24 modula, prozirna vrata, IP40

236x503x112mm (VxŠxD), sadrži izolirane PE/N sabirnice (2x13 priključaka) i pokrove za prazna mjesta, klasa zaštite: II, nazivna struja: 63A, nazivni napon: 400V AC, materijal: ABS, ispitivanje na žarnu nit: 650°C, temperatura okoline: -25° do +60°C, bez halogena, prema: IEC 60670 / IEC 62208



### SCHRACK-Info


- Nazidni razdjelnik. ABS s prozirnim vratima
- Zatvaranje: tipka/pritisak, mogućnost ugradnje male cilindar brave
- Sadrži PE i N stezaljke
- Klasa zaštite II
- Bez halogena prema RoHS
- Nazivni napon 400V AC / In=63A
- Temperatura okoline: -25° do +60°C
- Ispitivanje na žarnu nit: 650°C
- Stupanj zaštite: IP40, Otpornost na udar: IK08
- RAL9010 čista bijela



## Tehnički podaci

|                                |                            |
|--------------------------------|----------------------------|
| Neto širina (mm)               | 502,00                     |
| Neto visina (mm)               | 235,00                     |
| Neto dubina (mm)               | 112,00                     |
| Neto masa (kg)                 | 1,44                       |
| EAN                            | 9004840908312              |
| Disipacija snage (W)           | -36,00                     |
| Min. temperatura okoline (°C)  | -25                        |
| Maks. temperatura okoline (°C) | 60                         |
| Materijal vrata                | Plastična vrata sa staklom |
| Bez halogena                   | Da                         |
| Izvedba/tip                    | Nazidni sa vratima         |
| Broj redova                    | 2                          |
| Modula u 1 redu                | 24                         |
| IP stupanj zaštite             | IP40                       |
| Boja                           | RAL 9003 (signalno bijela) |

## Mjerne skice: Nazidni razdjelnik, 1-redni, 24 modula, prozirna vrata, IP40

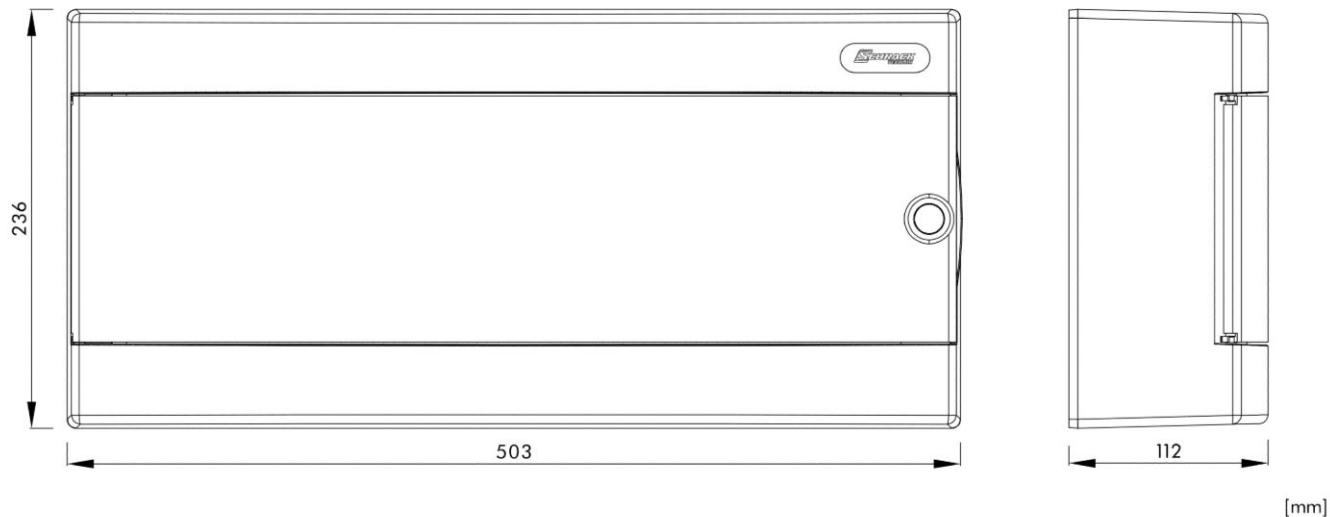

## Tablica artikla

| OPIS                                                                                                                                                                                                                                                                                                                                                                  | KAT. BROJ |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Nazidni razdjelnik, 1-redni, 24 modula, prozirna vrata, IP40<br>236x503x112mm (VxŠxD), sadrži izolirane PE/N sabirnice (2x13 priključaka) i pokrove za prazna mjesta, klasa zaštite: II, nazivna struja: 63A, nazivni napon: 400V AC, materijal: ABS, ispitivanje na žarnu nit: 650°C, temperatura okoline: -25° do +60°C, bez halogena, prema: IEC 60670 / IEC 62208 | BK080109  |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                                                                                                 |           |
| Polucilindar brava za razdjelnike TOPO BK080, IP40, metalna<br>metal, 2x keys included                                                                                                                                                                                                                                                                                | BK080096  |