


Tehnički list za artikl: BK080158--

Nazidni razdjelnik, 4-redni, 72 modula, bijela vrata, IP40

652x396x112mm (VxŠxD), sadrži izolirane PE/N sabirnice (2x13 priključaka) i pokrove za prazna mjesta, klasa zaštite: II, nazivna struja: 63A, nazivni napon: 400V AC, materijal: ABS, ispitivanje na žarnu nit: 650°C, temperatura okoline: -25° do +60°C, bez halogena, prema: IEC 60670 / IEC 62208



SCHRACK-Info


- Nazidni razdjelnik. ABS s punim (neprozirnim) plastičnim vratima
- Zatvaranje: tipka/pritisak, mogućnost ugradnje male cilindar brave
- Sadrži PE i N stezaljke
- Klasa zaštite II
- Bez halogena prema RoHS
- Nazivni napon 400V AC / In=63A
- Temperatura okoline: -25° do +60°C
- Ispitivanje na žarnu nit: 650°C
- Stupanj zaštite: IP40, Otpornost na udar: IK08
- RAL9010 čista bijela



Tehnički podaci

Neto širina (mm)	395,00
Neto visina (mm)	654,00
Neto dubina (mm)	112,00
Neto masa (kg)	3,00
EAN	9004840908336
Disipacija snage (W)	-68,00
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	60
Materijal vrata	Plastika
Bez halogena	Da
Izvedba/tip	Nazidni sa vratima
Broj redova	4
Modula u 1 redu	18
IP stupanj zaštite	IP40
Boja	RAL 9003 (signalno bijela)

Mjerne skice: Nazidni razdjelnik, 4-redni, 72 modula, bijela vrata, IP40

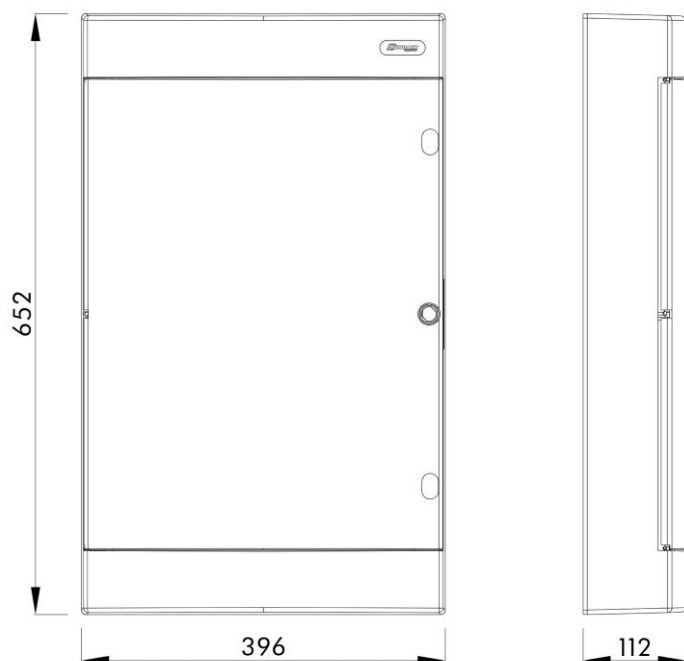

[mm]

Tablica artikla

OPIS	KAT. BROJ
Nazidni razdjelnik, 4-redni, 72 modula, bijela vrata, IP40 652x396x112mm (VxŠxD), sadrži izolirane PE/N sabirnice (2x13 priključaka) i pokrove za prazna mjesta, klasa zaštite: II, nazivna struja: 63A, nazivni napon: 400V AC, materijal: ABS, ispitivanje na žarnu nit: 650°C, temperatura okoline: -25° do +60°C, bez halogena, prema: IEC 60670 / IEC 62208	BK080158
Dodatni pribor	
Polucilindar brava za razdjelnike TOPO BK080, IP40, metalna metal, 2x keys included	BK080096