

Tehnički list za artikl: BSA90152--

Sabirnica, 1xRCCB N+3, 1xMCB N+3, 2xMCB N+1, 12MW

Compact-Busbar, suitable for products of AMPARO series, Forkbusbar, 4-pole, not possible to break off, no end caps required




Tehnički podaci

Presjek (mm ²)	10
Norma	EN 61439-1
Max. current beginning	65A
Max. current middle	100A
Materijal	E-Cu-ETP
Izolacijski materijal	Polyvinylchloride (PVC)
Bez halogena	no
Prenaponska kategorija	3
Nazivni udarni podnosivi napon [Uimp] (V)	4kV
Nazivni napon	240/415VAC/DC
Stupanj zagađenja	2
Otpor praćenja	CTI 600
Disipacija snage (W)	4,50
Temperature resistance (°C)	PVC up to 80°C; PC/ABS up to 90°C
Nazivna struja kratkog spoja	≤50kA
Maks. dozvoljeni predosigurač za zaštitu od kratkog spoja (A gG)	100A gL

Tehnički podaci - nastavak

Min. zračni razmak	≤3,0mm
Min. creepage distance	≤5,0mm
IP stupanj zaštite	IP20
Reakcija na vatru	PV/ABS V-0 at 1,5mm according to UL94

Mjerne skice: Sabirnica, 1xRCCB N+3, 1xMCB N+3, 2xMCB N+1, 12MW

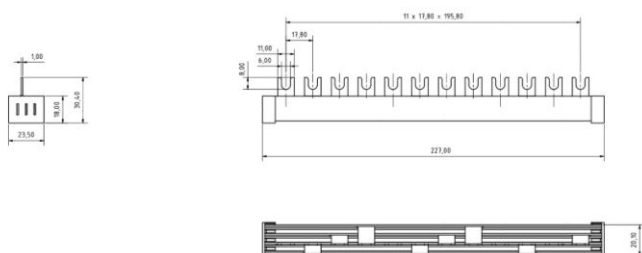

Tablica artikla

OPIS	KAT. BROJ
Sabirnica, 1xRCCB N+3, 1xMCB N+3, 2xMCB N+1, 12MW Compact-Busbar, suitable for products of AMPARO series, Forkbusbar, 4-pole, not possible to break off, no end caps required	BSA90152
Dodatni pribor	
Zaštitni pokrov žuti Cover for reserve spaces on the busbar	BSB00303