

Tehnički list za artikl: BSB90155-A

Sabirnica, 12x MCB 1-pol ili 4x MCB 3-pol, 12 MW, 10 mm²

Compact-Busbar, Forkbusbar, 3-pole, not possible to break off, No end caps required




Tehnički podaci

Presjek (mm ²)	10
Norma	EN 61439-1
Max. current beginning	63A
Max. current middle	100A
Materijal	E-Cu-ETP
Izolacijski materijal	PC
Bez halogena	According DIN EN 50267-2-2
Radna temperatura (°C)	do 125
Ispitivanje na žarnu nit (°C)	960
Prenaponska kategorija	3
Nazivni udarni podnosivi napon [Uimp] (V)	4kV
Nazivni napon	400V-AC
Nazivna prekidna moć	100Agl / 25 kA
Dielektrična čvrstoća	36kV/mm
Stupanj zagađenja	2
Uvjeti okoline	IEC 68-2
Klasa zapaljivosti	2


Tehnički podaci - nastavak

Otpor praćenja	CTI 600
Disipacija snage (W)	4,30


Mjerne skice: Sabirnica, 12x MCB 1-pol ili 4x MCB 3-pol, 12 MW, 10 mm²

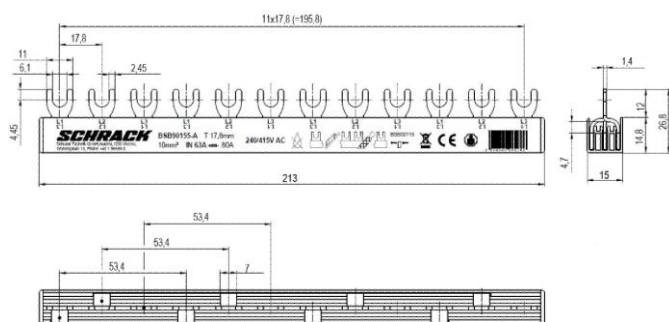

Dijagram: Sabirnica, 12x MCB 1-pol ili 4x MCB 3-pol, 12 MW, 10 mm²

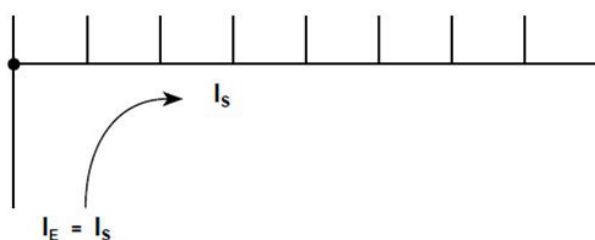

Dijagram: Sabirnica, 12x MCB 1-pol ili 4x MCB 3-pol, 12 MW, 10 mm²

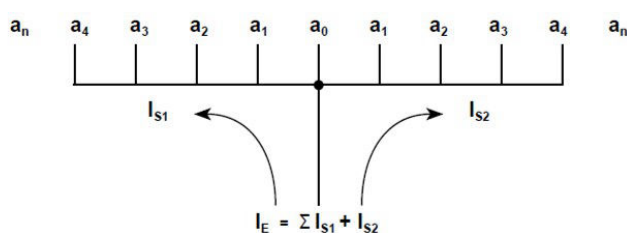

Tablica artikla

OPIS	KAT. BROJ
Sabirnica, 12x MCB 1-pol ili 4x MCB 3-pol, 12 MW, 10 mm ² Compact-Busbar, Forkbusbar, 3-pole, not possible to break off, No end caps required	BSB90155-A
Potrebni pribor	
Završna pločica za 2-polnu/3-polnu sabirnicu Završna pločica za izolaciju krajeva sabirnice	BS900116
Dodatni pribor	
Zaštitni pokrov žuti Cover for reserve spaces on the busbar	BSB00303
Završetak za sabirnicu 3-pol, 10mm ² za izoliranje kraja šine	BSB00115-A