

Tehnički list za artikl: DTWG046045

Zidni komun. ormar S-RACK, Š=600 V=290 D=450, 19", 4U

RAL7035 svjetlo sivi, 19" nosači 2x sprijeda



SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof


- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
 - Top and bottom chassis: 0.6mm
 - Corner profile: 1.1mm
 - Rails: 1.4mm
 - Front door: 0,6mm
 - Rear panel: 0.5mm
 - Side panel: 0.5mm
- **Colors:**
 - RAL7035 Light grey
 - Strips: RAL5005 Signal blue
- **Height:** 4U
- **Width:** 600mm
- **Depth:** 450mm

- **Maximum load:** With even distribution: 80kg
- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 230°.
- **Side panels:** Removable and lockable. The side panels are also fitted with a plastic dummy at the locking point of the barrel in the center. Optional accessory kit with 2 cylinders (O-shape/quarter-turn with cam lock) can be installed to provide more security.
- **Rails:** D= 450mm have 2x front 19" rails, galvanised, depth-adjustable, U marking present. A second pair of 19" DTWGPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy installations.
- **Cable entry options:** In roof, floor and rear wall.
 - The floor, roof and rear panel are provided with a break-out blank cover.
- **Cooling:**
 - Passive cooling through ventilation slots and heat exchange with the outside area.
 - Active cooling by optional DTLT fans, which are easily and quickly inserted into the roof from the outside. This can also be easily done out afterwards.
- **Earthing:** Earthing set is included
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled and delivered with assembly material


Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	290,00
Neto dubina (mm)	450,00
Neto masa (kg)	9,80
EAN	9004840990805
Min. temperatura okoline (°C)	5
Maks. temperatura okoline (°C)	40
Visinska jedinica	4
Boja	RAL 7035 / RAL 5005 (svijetlo siva / plava)
IP stupanj zaštite	IP20
Maksimalno opterećenje (kg)	80
Serijski	S-RACK


Mjerne skice: Zidni komun. ormar S-RACK, Š=600 V=290 D=450, 19", 4U

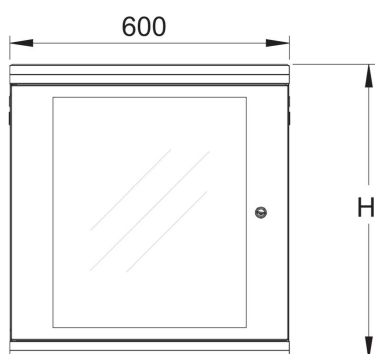


Front view

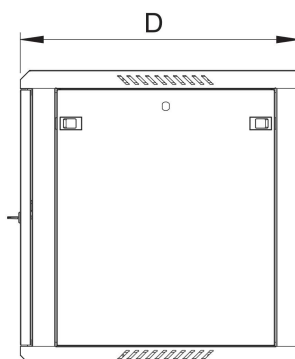


Side view




Bottom view




Top view

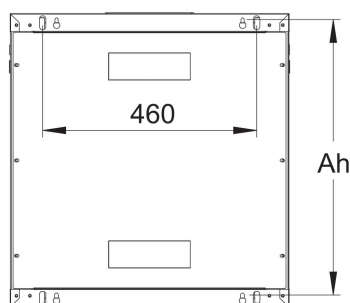


Rear view



Front inside view


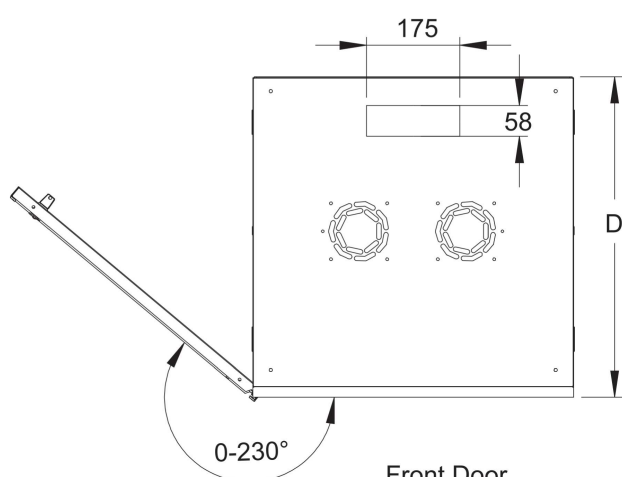


Front Door
Opening Angle

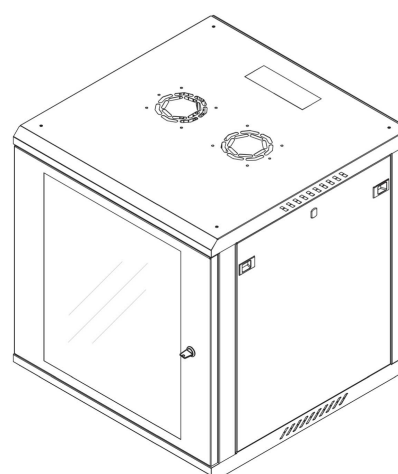

Isometric view


Mjerne skice: Zidni komun. ormar S-RACK, Š=600 V=290 D=450, 19", 4U

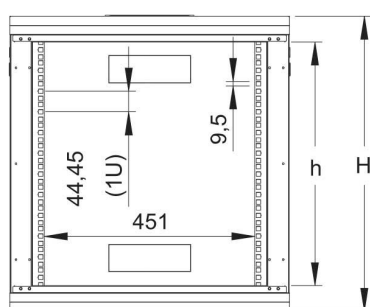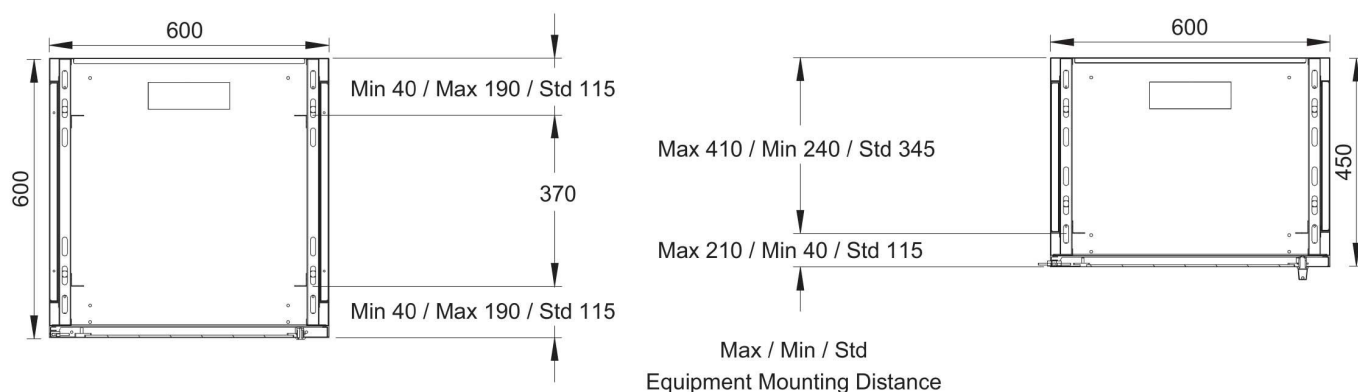

Dimensions in
Width and Height

U Height	Size D	h	H	Ah
4U	450/600	178	290	251
6U	450/600	267	379	340
9U	450/600	400	512	473
12U	450/600	533	645	606
15U	450/600	667	779	740
18U	450/600	800	912	873

Mjerne skice: Zidni komun. ormar S-RACK, Š=600 V=290 D=450, 19", 4U

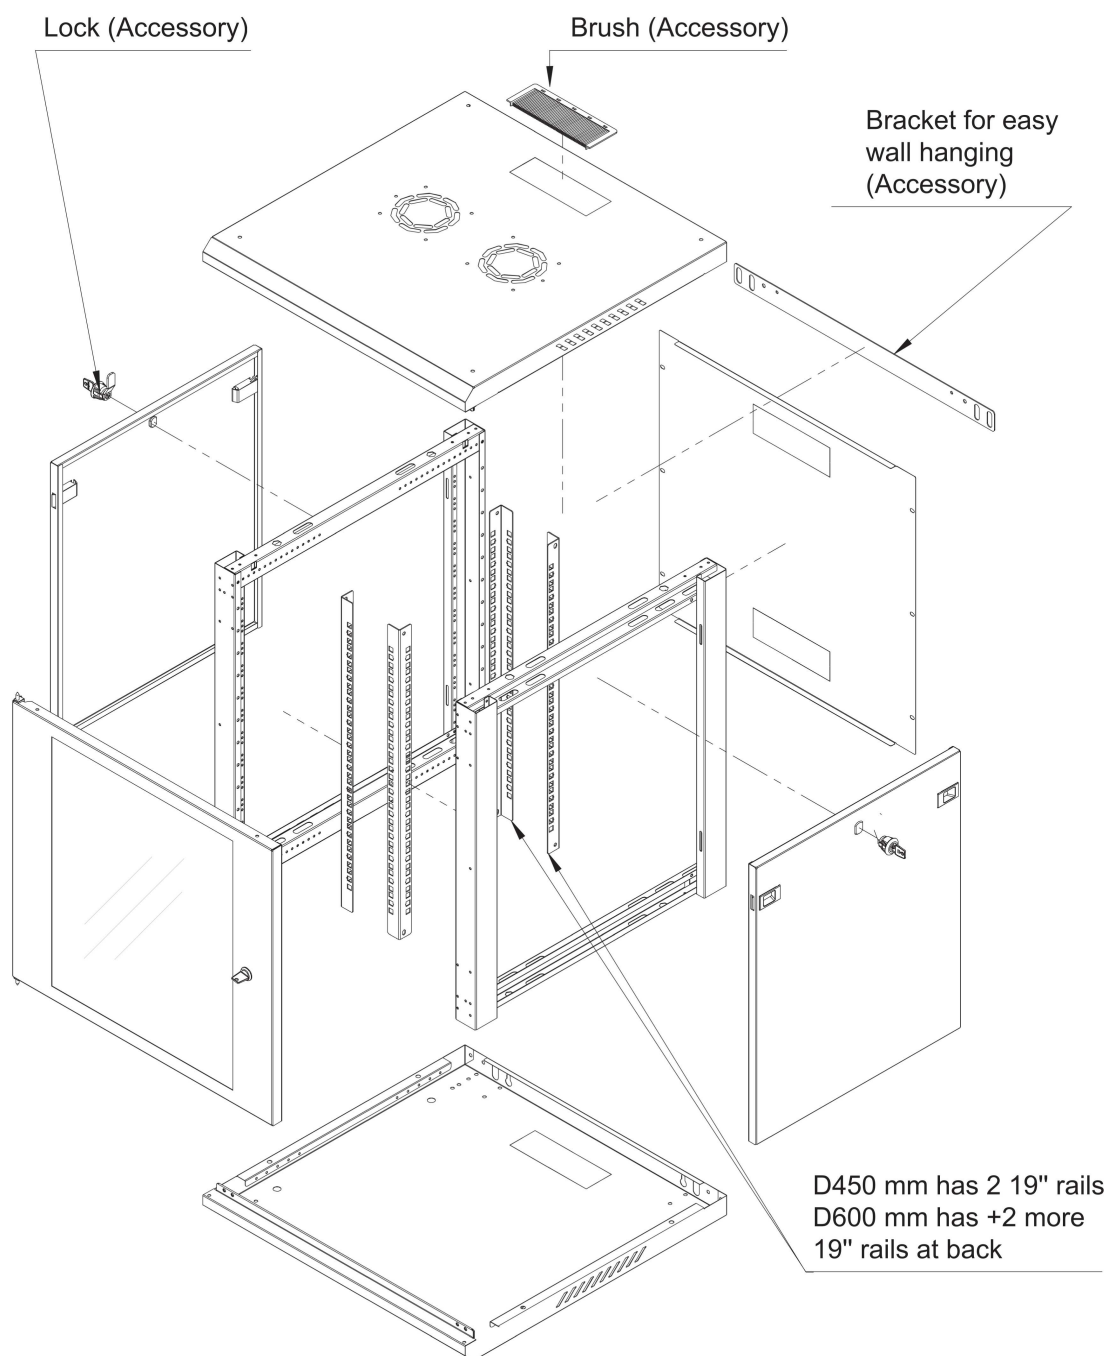

OPIS

Zidni komun. ormar S-RACK, Š=600 V=290 D=450, 19", 4U

RAL7035 svjetlo sivi, 19" nosači 2x sprijeda

KAT. BROJ

DTWG046045

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
Dodatni pribor	
Krovna vent. jedinica, 2 vent. za DT/DTW, analog. termostat RAL7035, instalacija s vanjske strane ormara	DTLTR02A
Krovna vent. jedinica, 2 ventilatora za DT/DTW, s prekidačem RAL7035, instalacija s vanjske strane ormara	DTLTR02S
Krovna vent. jedinica, 1 vent. za DT/DTW, analog. termostat RAL7035, instalacija s vanjske strane ormara	DTLTR01A
Krovna vent. jedinica, 1 ventilator za DT/DTW, s prekidačem RAL7035, instalacija s vanjske strane ormara	DTLTR01S
19" profilni nosač set, 04U za S-RACK ormara DTWG i DTWH, 1 pak = 2 komada (lijevi/desni)	DTWGPROF04
19" fiksna polica do 30kg, dubine 300mm, 1U, niskoprofilna učvršćenje u 2 točke, RAL7035	DTFT1300
Set kotačića (2 sa, 2 bez kočnica) za S-RACK ormara DTWG i DTWH, najveće opterećenje = 80kg	DTZR0006
Bravica i ključevi bočne str. S-RACK zidnih ormara DTWG/H 1 Set = 2pcs.	DTZLOCK06
Nosač za zidno zavješanje DTWG i DTWH zidnih ormara 2x obložene utisnute matice, RAL7035 svjetlo siva	DTZBRACK
Umetak s četkom za pod/krov za uvod kabela S-RACK ormara DTWG i DTWH, 60x176mm	DTZBRUSH04
Prespojni panel 19", prazan, za 24 modula (SFA)(SFB), 1U svjetlo siva, jezičac prespojnog kabela okrenut prema dolje	HSE0240GS
19" vodilica kabela s 5 metalnih prstena, 1U, RAL7035	DTBC105R
19" set vijaka, kaveznih matica+podložne pločice M6 (20 kom)	DTSRA020
Preklopnik 24xRJ45 10/100/1000T, bez vent., unut. napajanje Metalno kućište, 19"	QLGSW2457
19" napojna letva sa 9xshuko, alu 1U, kabel 2m, RAL7035	IU070114
19" napojna letva sa 7xshuko+prenaponska zaštita, 1.25U kabel s utikačem 2m, RAL7035	IU070113
19" napojna letva, 9xshuko+prekidač, kabel 2m, crna, alu, 1U ALU profil	Q7070114-A
19" Napojna letva, 7xshuko+prekidač, prenap.zaštita, crna 1U, kabel 2m, alu profil, crna	Q7070113-A