

Tehnički list za artikl: DTWI096047

Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U

sivi, RAL7035, metalna prednja vrata



SCHRACK info

Network wallmount 19" IP55 Outdoor Cabinets are designed for industrial applications.

Based on EN60529 provides IP55 protection class against dust and water ingress.

The enclosure provides IP55 protection against dust and water.

After installation of fans or filters, IP54 is still met.

Application: Outdoor areas under environment influences.

Protection of the installed equipment against ingress of solid foreign objects (falling dirt and windblown dust) and against the ingress of water (rain, sleet, snow, splashing water).

Gasketed doors IP55

3 point locking system with swing handle. Isolated cable entries.

1,5 mm thick material monoblock welded construction, with epoxy polyester type powder coating which is RAL7035 Light Grey color, provides corrosion resistance.

Passive ventilation via filtered inlets.

Option to install fans for active ventilation.

Outdoor cabinets have a fan cover in the top view and side filter cover to comply with protection class IP55.

TEHNIČKI PODACI

- Colour: RAL7035 Light Grey
- Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even under cold/hot weather conditions. The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.


- Heights: 7, 9, 12 and 16U
- Širina: 600mm
- Dubina: 450mm
- Maximum Load: 100kg
- Door: Metal door including keyed swing lock handle with 3point locking system provides security and anti-vandal structure, also maintaining the IP55 protection.
- Included are 4 pcs, 3,0 mm thick wall mounts with matching washer and screws, as well as a cable entry flange with three glands: 2 x PG21, 1 x PG48, 2 x PVC blind caps with 28mm diameter (installed in the floor) and a blind flange (accessory pack).
- Filters are included
- Cabinets are delivered with: 1 set = 2pcs 19" front rails




Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	579,00
Neto dubina (mm)	450,00
Neto masa (kg)	33,00
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	70
Prikladno za širinu ormara (mm)	600
Visina (mm)	579
Boja	RAL 7035 (svijetlo siva)
Osnovna oznaka	Kućište


Mjerne skice: Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U



Top view

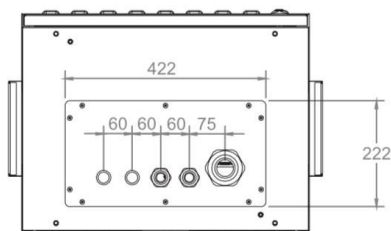


Bottom view

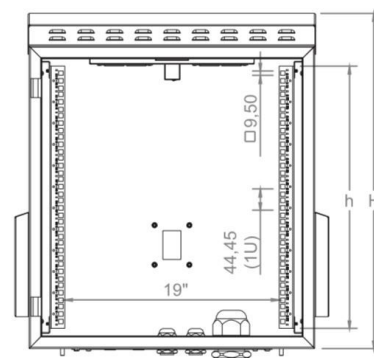


Inside view


Mjerne skice: Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U

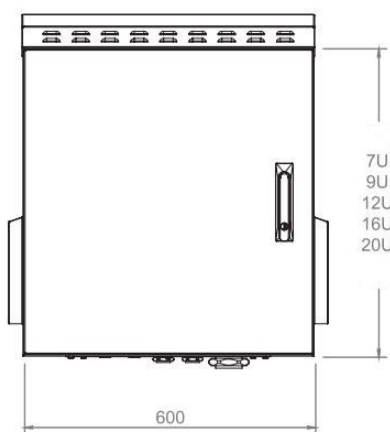


Front view

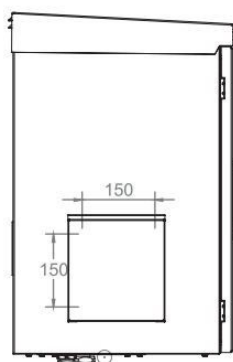


Side view

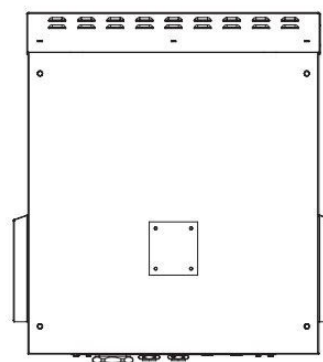

Rear view

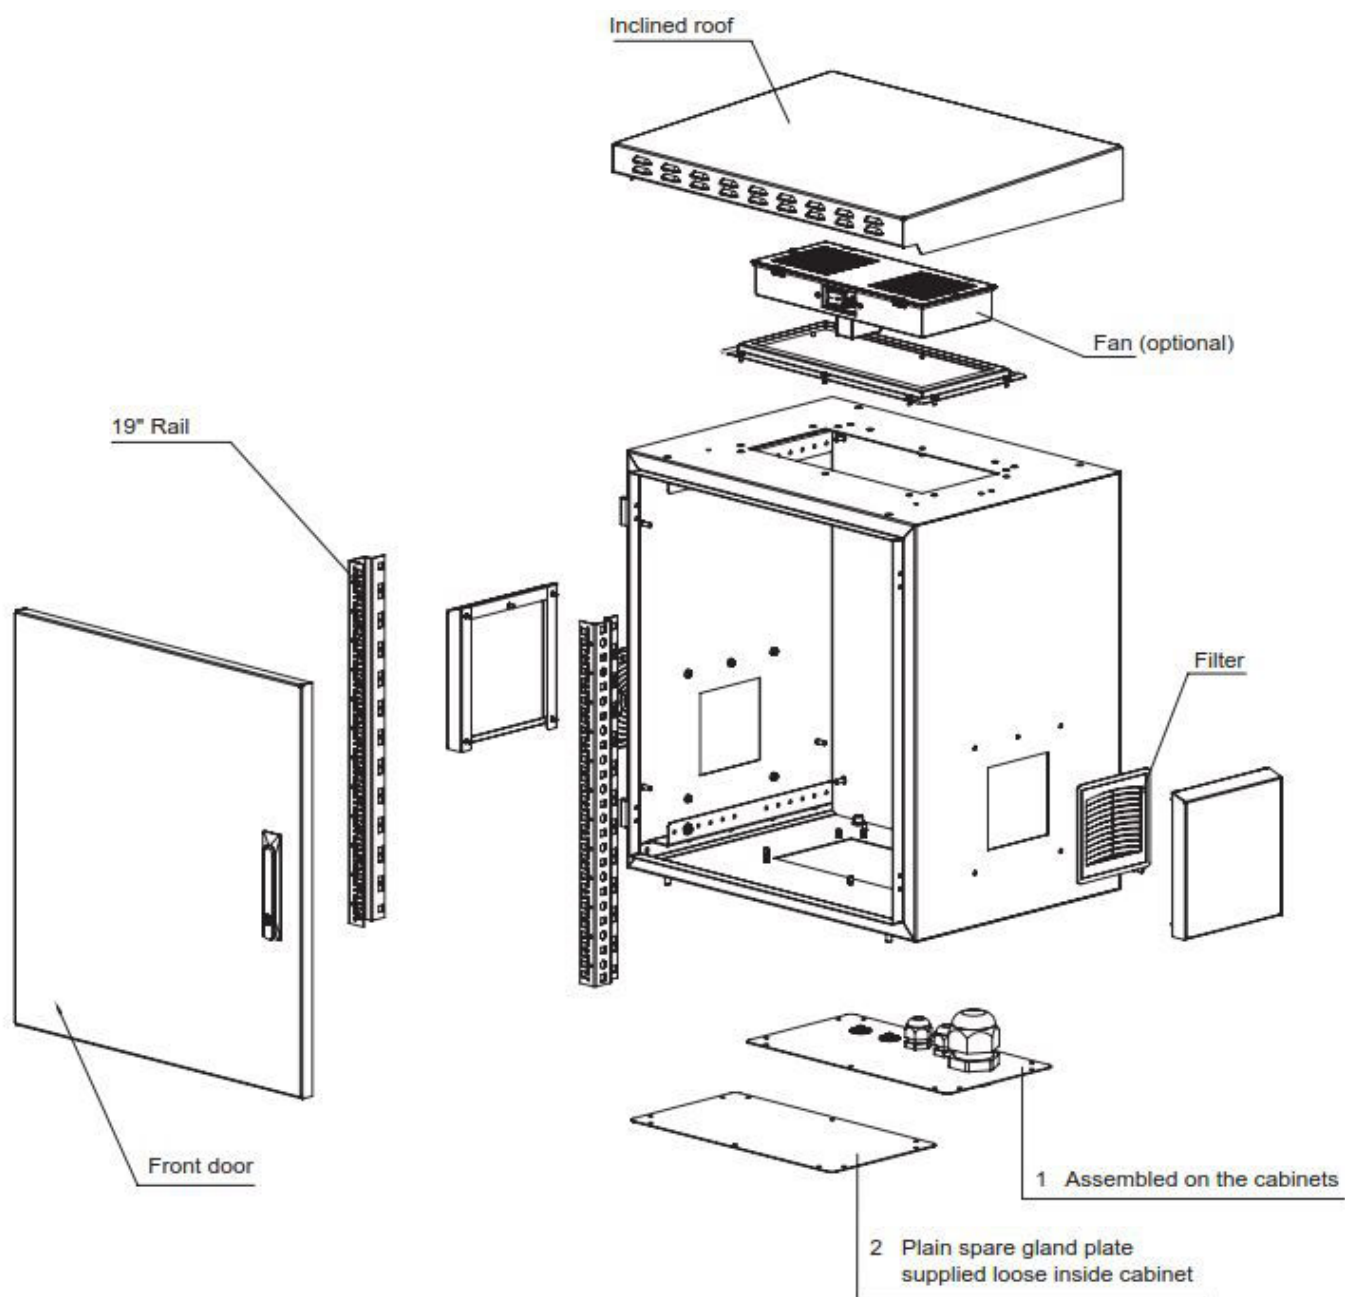Mjerne skice: Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U

Mjerne skice: Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U

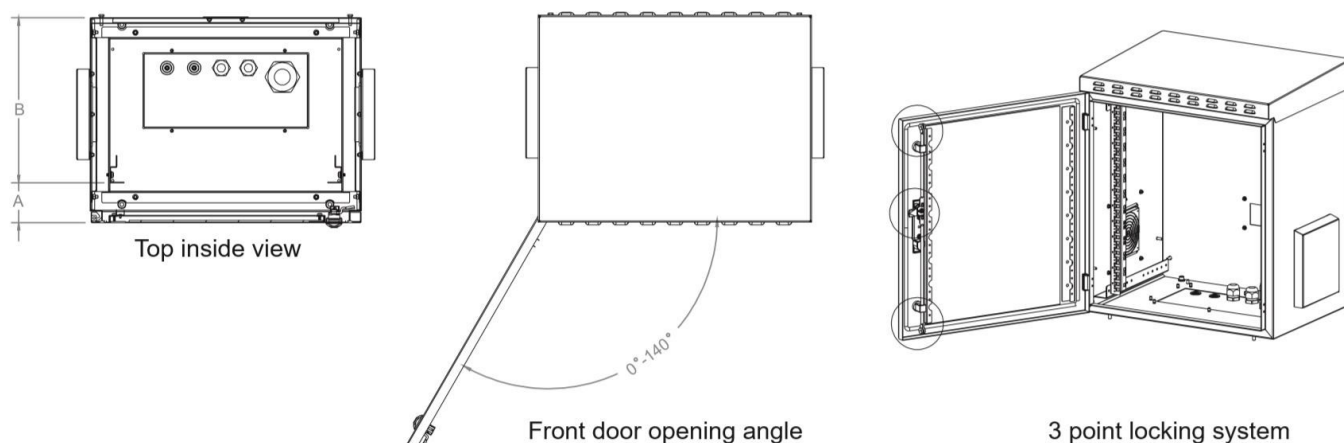

Mjerne skice: Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U

	A		B	
	Min	Max	Min	Max
D=450	60 mm	185 mm	260 mm	385 mm
D=600	60 mm	335 mm	260 mm	535 mm

Podatkovna tablica: Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U

Tip	h [mm]	H [mm]	neto masa [kg]	bruto masa [kg]
DTWI076047	311	490	31	32
DTWI096047	400	579	33	34
DTWI126047	533	713	37	38
DTWI166047	711	891	41	43

Tablica artikla

OPIS	KAT. BROJ
Zidni kom. ormar IP55 za vanj. mont., š600 v579 d450, 19", 9U sivi, RAL7035, metalna prednja vrata	DTWI096047
Dodatni pribor	
Krovna vent. jedinica, 1xventilator za DTWI, s prekidačem za zidne ormare IP55, svjetlosiva, instalacija izvan ormara	DTLTR5521
Krovna vent. jedinica, 2xventilator za DTWI, s prekidačem za zidne ormare IP55, svjetlosiva, instalacija izvan ormara	DTLTR5522
19" profilni nosač set, 9U za S-RACK ormare DTWI 1 pak = 2 komada	DTWIPROF09
Podnožje v=100, komplet za DTWI ormare š=600 d=450, RAL7035 za betonske temelje i DTWI zidne ormare IP55	DTOTI10604
Set za montažu na stup DTWI ormara, za stupove 10-15cm 2x držač za stup + 2x montažni nosač za ormar + vijci	DTWIPAK
Adapter zakretne ručke za polucilindar S-RACK s. ormara freestanding enclosure DT and wallmounting enclosure DTWI. For DTWI additionally necessary is DTZLOCK05	DTZLOCK02
Komplet adaptera zakretne ručke za polucilindar za DTWI potreban dodatni DTZLOCK02	DTZLOCK05