

Tehnički list za artikl: DTWI166042

Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U

sivi, RAL7035, metalna prednja vrata



SCHRACK info

Network wallmount 19" IP55 Indoor Cabinets are designed for industrial applications. Based on EN60529 provides IP55 protection class against dust and water ingress.

The enclosure provides IP55 protection against dust and water.

After installation of fans or filters, IP54 is still met.

Application areas are semi-open areas like factories, warehouses, lean-to roof conditions, without no direct rain and environmental effects. Totally gasketed doors, IP55 performing swing handle locking with 3 point locking system and isolated cable entries provide best performance for water and dust ingress.

1,5 mm thick material monoblock welded construction, with epoxy polyester type powder coating which is RAL7035 Light Grey color, provides the corrosion resistance.

Passive ventilation via filtered inlets.

TEHNIČKI PODACI

- Colour: RAL7035 Light Grey
- Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even under cold/hot weather conditions. The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.
- Heights: 7, 9, 12 and 16U
- Širina: 600mm


- Dubina: 450mm
- Maximum Load: 100kg
- Door: Metal door including keyed swing lock handle with 3point locking system provides security and anti-vandal structure, also maintaining the IP55 protection
- Included are 4 pcs. 3,0 mm thick wall mounts with matching washer and screws, as well as a cable entry flange with three glands: 2x PG21, 1 x PG48, 2 x PVC blind caps with 28mm diameter (installed in the floor) and a blind flange (accessory pack).
- Filters are included
- Cabinets are delivered with: 1 set = 2pcs 19" front rails




Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	841,00
Neto dubina (mm)	450,00
Neto masa (kg)	37,00
Min. temperatura okoline (°C)	5
Maks. temperatura okoline (°C)	40
Prikladno za širinu ormara (mm)	600
Visina (mm)	841
Boja	RAL 7035 (svijetlo siva)
Osnovna oznaka	Kućište


Mjerne skice: Zidni kom. ormar IP55 za unuť. mont., š600 v891 d450, 19", 16U



Top view

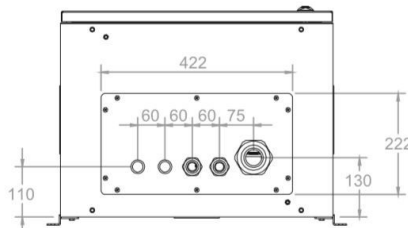



Bottom view

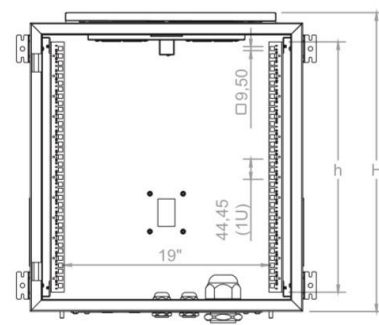


Inside view

Mjerne skice: Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U

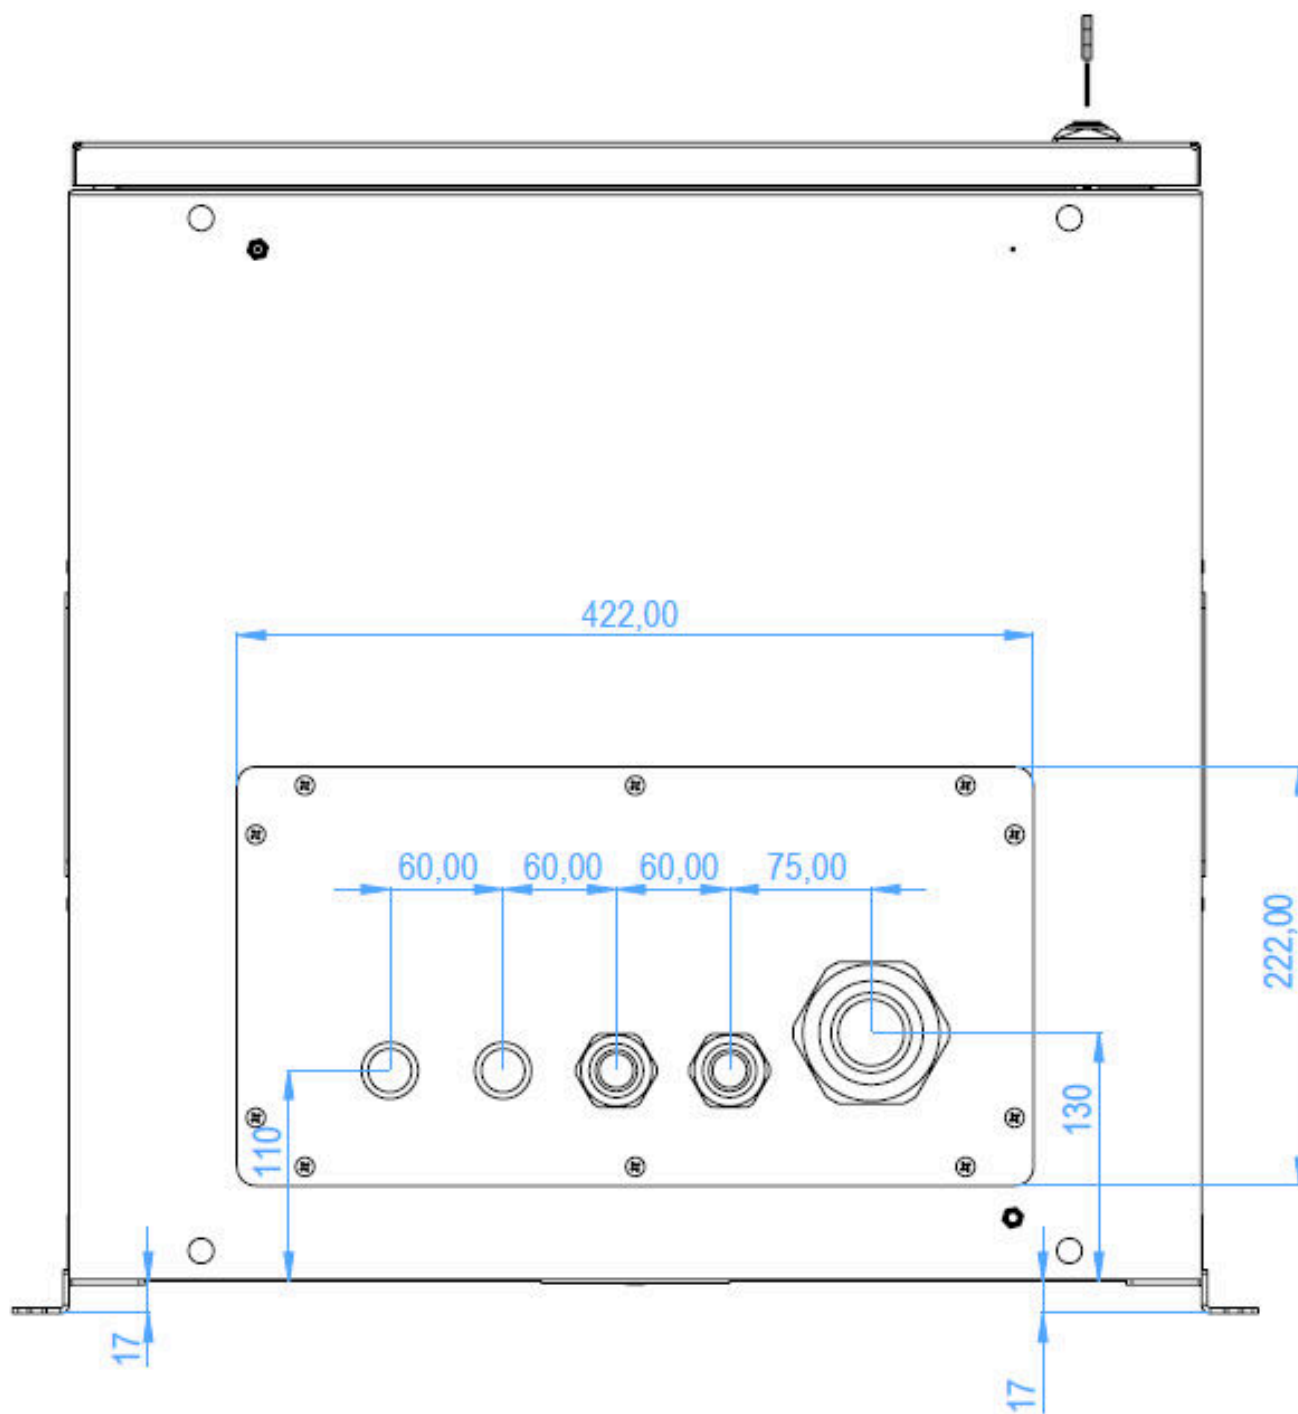


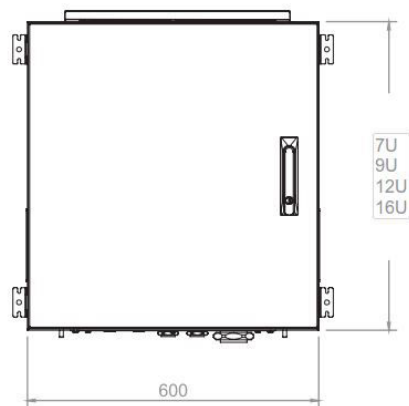Mjerne skice: Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U


Front view




Side view

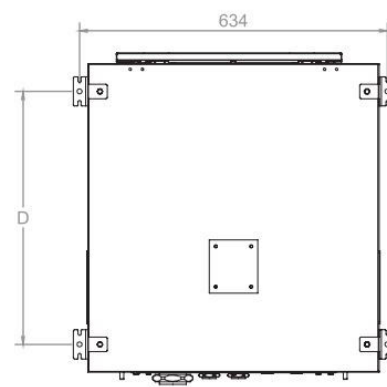

Rear view

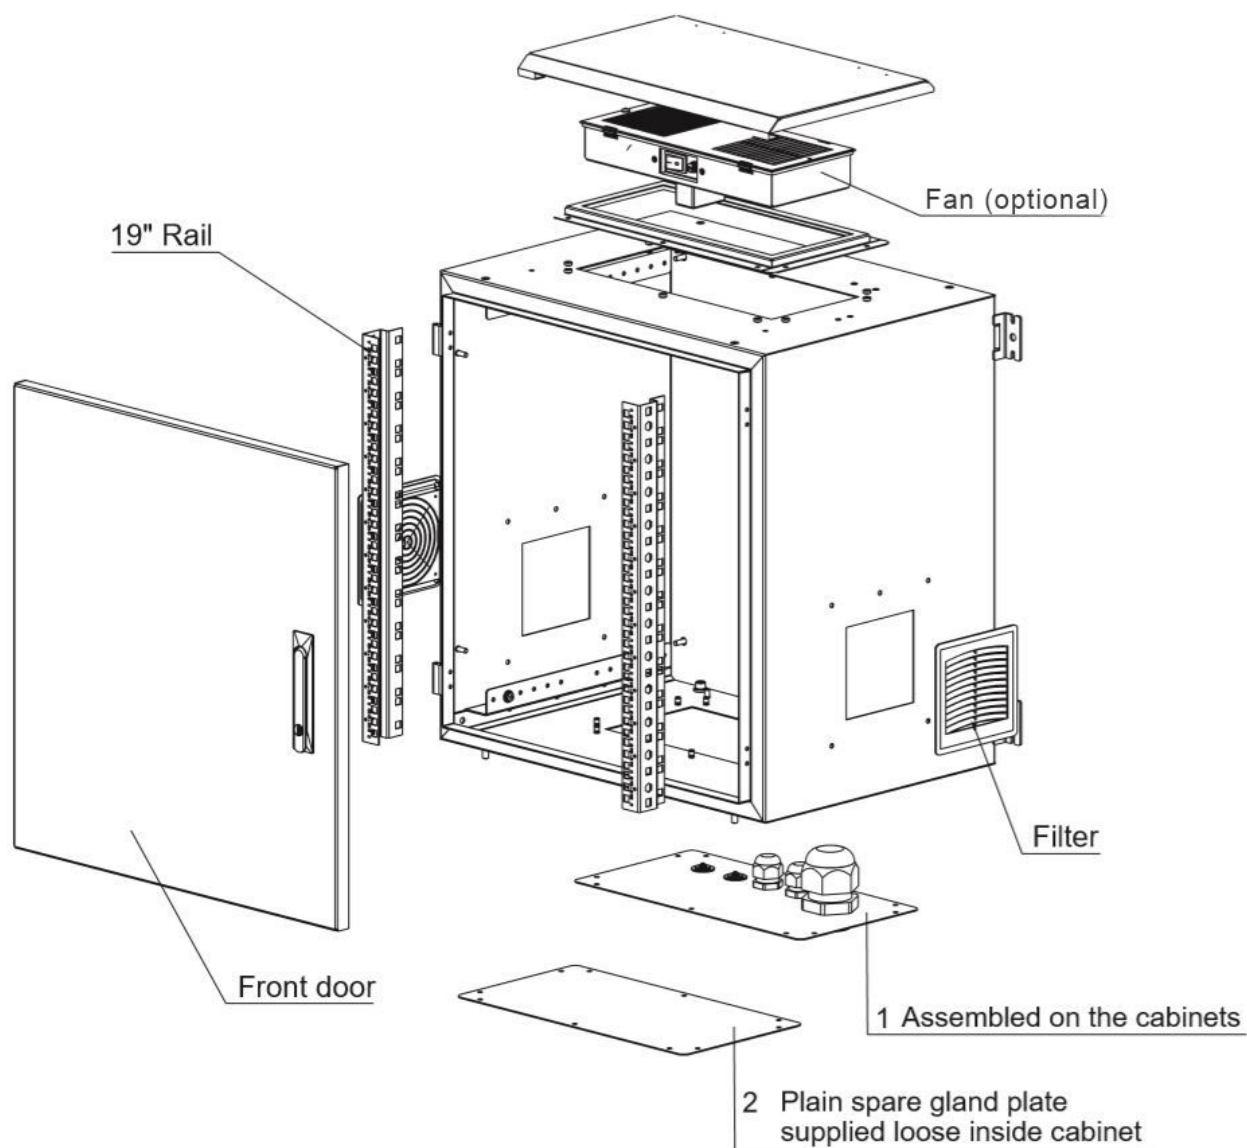Mjerne skice: Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U

Mjerne skice: Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U

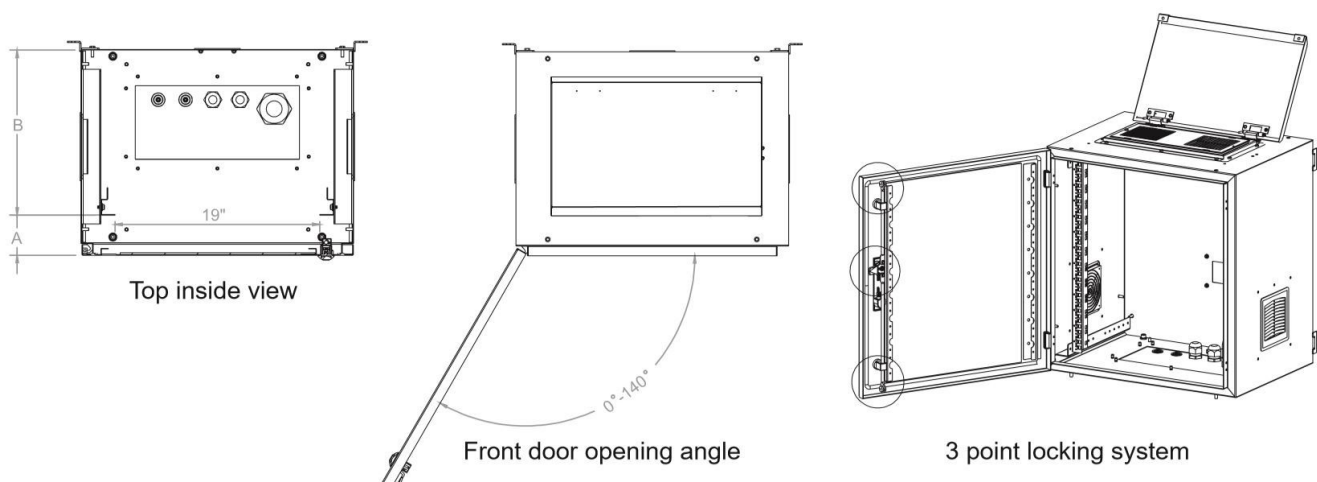

Mjerne skice: Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U

	A		B	
	Min	Max	Min	Max
D=450	60 mm	185 mm	260 mm	385 mm
D=600	60 mm	335 mm	260 mm	535 mm

Podatkovna tablica: Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U

Tip	h [mm]	H [mm]	Neto masa[kg]	Bruto masa [kg]
DTWI076040	311	440	27	28
DTWI096040	400	529	30,5	31,5
DTWI126040	533	663	33,5	34,5
DTWI166040	711	841	37,2	38,2
DTWI076042	311	440	25	26
DTWI096042	400	529	28	29
DTWI126042	533	663	31	32
DTWI166042	711	841	37	38

Tablica artikla

OPIS	KAT. BROJ
Zidni kom. ormar IP55 za unut. mont., š600 v891 d450, 19", 16U sivi, RAL7035, metalna prednja vrata	DTWI166042
Dodatni pribor	
Krovna vent. jedinica, 1xventilator za DTWI, s prekidačem za zidne ormare IP55, svjetlosiva, instalacija izvan ormara	DTLTR5521
Krovna vent. jedinica, 2xventilator za DTWI, s prekidačem za zidne ormare IP55, svjetlosiva, instalacija izvan ormara	DTLTR5522
19" profilni nosač set, 16U za S-RACK ormare DTWI 1 pak = 2 komada	DTWIPROF16
Adapter zakretne ručke za polucilindar S-RACK s. ormara freestanding enclosure DT and wallmounting enclosure DTWI. For DTWI additionally necessary is DTZLOCK05	DTZLOCK02
Komplet adaptera zakretne ručke za polucilindar za DTWI potreban dodatni DTZLOCK02	DTZLOCK05
Preklopnik 24xRJ45 10/100/1000T, bez vent., unut. napajanje Metalno kućište, 19"	QLGSW2457
19" napojna letva sa 9xshuko, alu 1U, kabel 2m, RAL7035	IU070114
19" napojna letva sa 7xshuko+prenaponska zaštita, 1.25U kabel s utikačem 2m, RAL7035	IU070113
19" napojna letva, 9xshuko+prekidač, kabel 2m, crna, alu, 1U ALU profil	Q7070114-A
19" Napojna letva, 7xshuko+prekidač, prenap.zaštita, crna 1U, kabel 2m, alu profil, crna	Q7070113-A