




Tehnički list za artikl: DW065540--

Zidni komunik. ormar DW, rastav. Flat Pack, 550x400, 19", 6U



SCHRACK info
TEHNIČKI PODACI

- Čelični lim
- Visine: 4, 6, 9 i 12U
- Širina: 550mm
- Dubina: 400mm
- Boja: RAL7035 (svijetlo-siva)
- Stupanj zaštite: IP20
- Front-full-glassdoor made from safety glass 5mm including lock and 2 keys
Door hinged right, easy and quick change to left hinging possible
Door opening: 130°
- 19"- rails (2 pcs.) galvanized. Step-adjustable in the front cabinet part.
- Cable-entry-openings in roof (1x), floor (1x) and rearpanel (1x). Covered with „break-out style“ blanking covers, which can be easily broken out by use of a simple tool like a screwdriver.
- Passive cooling by sharing heat with environment via chassis
- space between front vertical 19"-rail and door glass at max. spacing: W550 – 35mm
- Earthing:
M8-Earthing point in the rear of the cabinet
Earthing cables for connection to all dismountable parts included in delivery.
- Wide range available accessories (fans, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.)
- Units of measurement: Inch: 1" = 25,4mm, Unit (Height Unit): 1U = 1,75" = 44,45mm


Tehnički podaci

Neto širina (mm)	550,00
Neto visina (mm)	320,00
Neto dubina (mm)	400,00
Neto masa (kg)	13,00
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
Visina	6U-320mm
Proizvod	Data-Enclosures Wallmounting Flatpack IP20
Boja	RAL 7035 (svijetlo siva)
Krovni ventilator, opcija	Ne
Osnovna oznaka	Kućište


Podatkovna tablica: Zidni komunik. ormar DW, rastav. Flat Pack, 550x400, 19", 6U

Typ	A	B	C	D	E	R1	R2	Gewicht brutto (kg)	Gewicht netto (kg)	Empfohlene Maximallast (kg)
	(mm)									
DW045540--	230	180	505	550	400	180	435	11,4	11,2	35
DW065540--	320	270	505	550	400	270	435	13,6	13,3	
DW095540--	463	412	505	550	400	412	435	17,4	17,1	
DW125540--	590	530	505	550	400	530	435	19,7	19,4	

Mjerne skice: Zidni komunik. ormar DW, rastav. Flat Pack, 550x400, 19", 6U

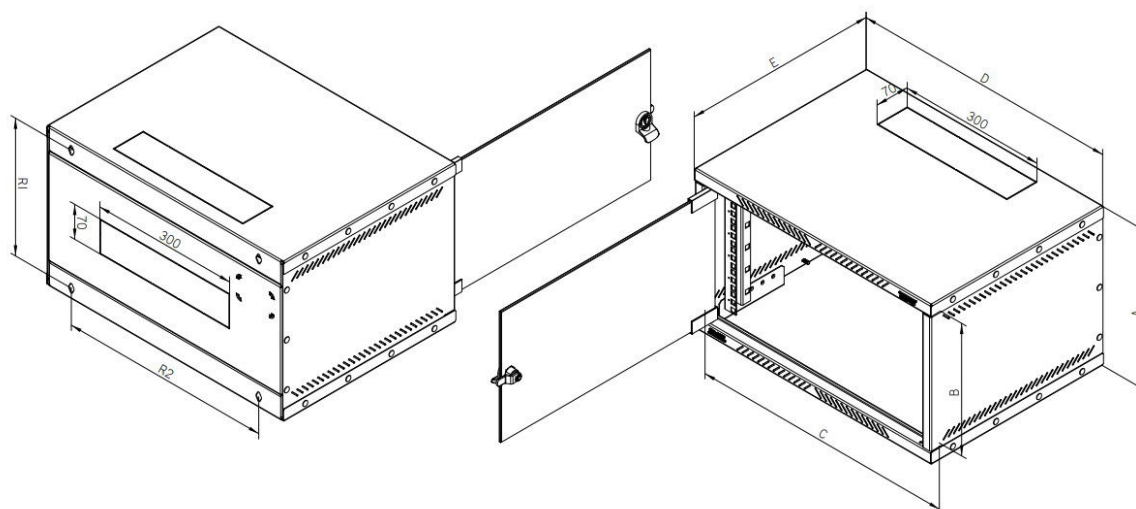

Schnittansicht der vertikalen 19"-Profilschienen

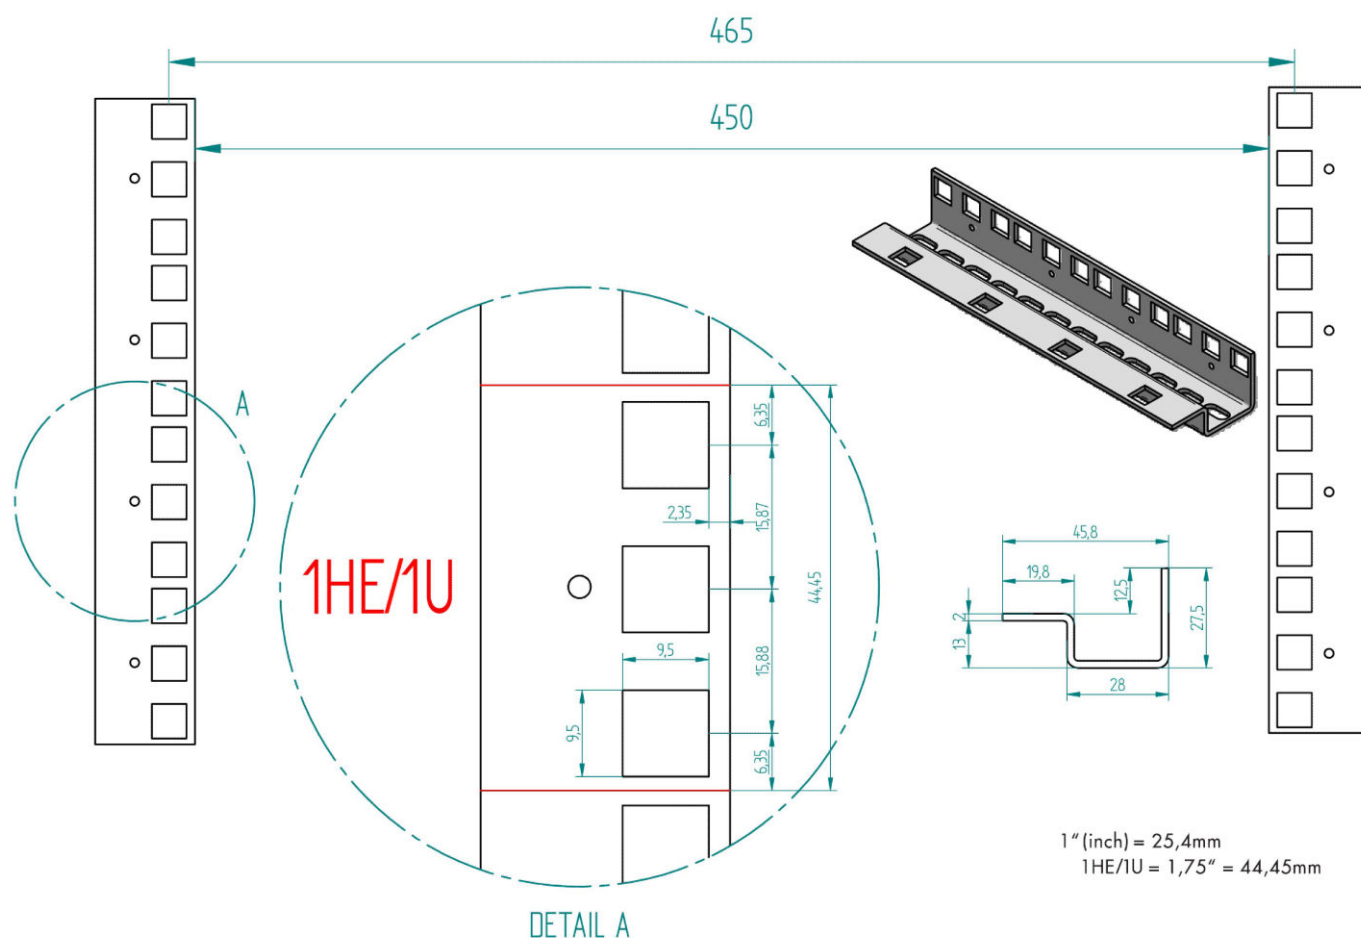

Tablica artikla

OPIS	KAT. BROJ
Zidni komunik. ormar DW, rastav. Flat Pack, 550x400, 19", 6U	DW065540
Dodatni pribor	
19" fiksna polica do maks. 50kg, d=350mm, 1U, RAL7035	DFS14835-C
19" set-vijci M6, kavezne matice i podložne pločice(50 kom.)	DSSRA050
LED rasvjeta za ormare, magnet, 230VAC, s kontaktom za vrata automatski u radu čim se otvore vrata, vanjsko napajanje	DTLIGHT01
Preklopnik 24xRJ45 10/100/1000T, bez vent., unut. napajanje	QLGSW2457
Metalno kućište, 19"	
Prespojni panel 19", prazan, za 24 modula (SFA)(SFB), 1U svjetlo siva, jezičac prespojnog kabla okrenut prema dolje	HSER0240GS
19" napojna letva sa 9xshuko, alu 1U, kabel 2m, RAL7035	IU070114

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
19" napojna letva sa 7xshuko+prenaponska zaštita, 1.25U kabel s utikačem 2m, RAL7035	IU070113
19" napojna letva, 9xshuko+prekidač, kabel 2m, crna, alu, 1U ALU profil	Q7070114-A
19" Napojna letva, 7xšuko+prekidač, prenap.zaštita, crna 1U, kabel 2m, alu profil, crna	Q7070113-A