

Tehnički list za artikl: H6GWS01K05

Presp. kab. RJ45 oklop. cat.6a 10GB, PE vanjski, crni, 1.0m

4PPoE 100W, kratki utikač,



Schrack-Info

Patchcords for generic, structured network cabling systems.

Support all applications requiring Class D to Class E_A (e.g. 100Base-TX, ATM) as well as 10GBase-T, 1000Base-T and VoIP, 4PPoE.

Black Patchcord with moulded boot in the color black.

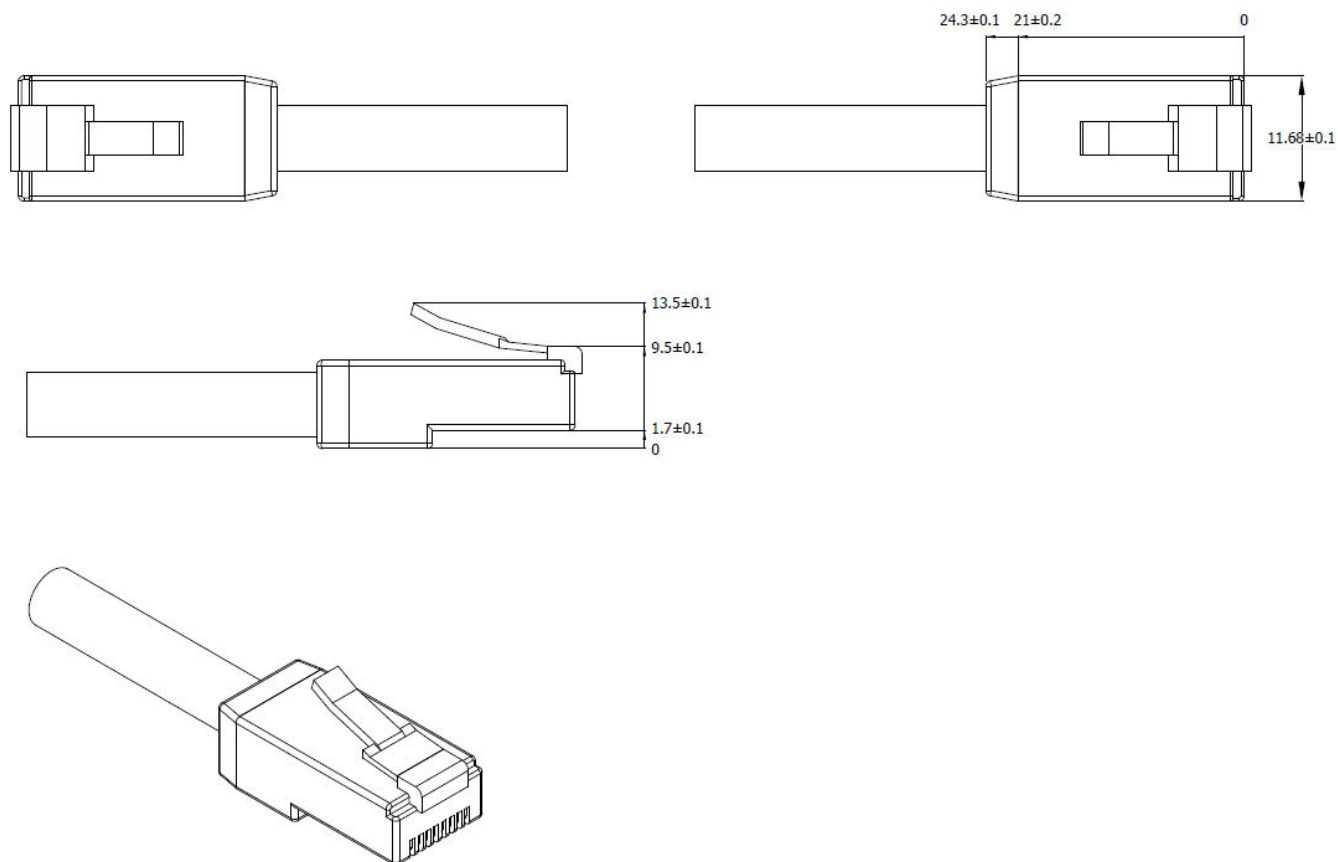
- PE jacket UV-resistant for OUTDOOR applications
- Short booth particularly suitable for IP cameras, IP telephones, etc.
- Cable diameter: $6.0 \pm 0.3\text{mm}$
- Pin assignment: 1:1
- Wire: AWG26
- 4PPoE 100W capable

Tehnički podaci

Kategorija	Cat.6A
Sastav kabela	4x2xAWG26/7
Kabelski oklop	S/FTP
Materijal vodiča	Stranded wire AWG 26/7 (0,457mm)

Tehnički podaci - nastavak

Konekcija	1:1
Brzina prijenosa	10Gbit
Broj parica	4
Oklop	Oklopljen
Vanjski omotač kabela	PE (vanjski)
LED funkcija	bez LED
Neto masa (kg)	0,05
Boja	crna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	60
Radna temperatura (°C)	-25 do +60
Temperaturno područje - Instalacija (°C)	+0 to +50
Impedancija (Ohm)	100 ± 5
RoHS	conform
Impedancija petlje (Ω/km)	300
4PPoE	Da
Duljina prespojnog kabela (m)	1,0
Neto širina (mm)	230,00
Neto visina (mm)	175,00

Mjerne skice: Presp. kab. RJ45 oklop. cat.6a 10GB, PE vanjski, crni, 1.0m

Tablica artikla

OPIS	NVP (%)	MASA BAKRA (kg/km)	KAT. BROJ
Presp. kab. RJ45 oklop. cat.6a 10GB, PE vanjski, crni, 1.0m 4PPoE 100W, kratki utikač,			H6GWS01K0S
Dodatni pribor			
S/FTP inst. kabel cat.7,4x2xAWG23/1, 1000MHz,PE, vanjski crni, za rezanje	78	28	HSEKP423E3
S/FTP kabel cat.7, 4x2xAWG23/1, 1000MHz, PE, vanj., crni za rezanje	80	34	HCKP10N04E
S-JACK modul RJ45 oklopljen, Cat.6a 10GB, 4PPoE 100W SFB 24 kom. u kutiji			HSEMRJ6GS2
S-JACK modul RJ45 oklop., Cat.6a 10GB, 4PPoE 100W SFB .			HSEMRJ6GS1
TOOLLESS LINE modul RJ45 oklop., cat.6a 10GB, 4PPoE 100W SFB (SFB)			HSEMRJ6GBA
TOOLLESS LINE modul RJ45 oklop., cat.6a 10GB, 4PPoE 100W SFA (SFA)			HSEMRJ6GWA