


Tehnički list za artikl: HDCR100252

IS-1 okomita vodilica kabla 45U RAL9005 crna

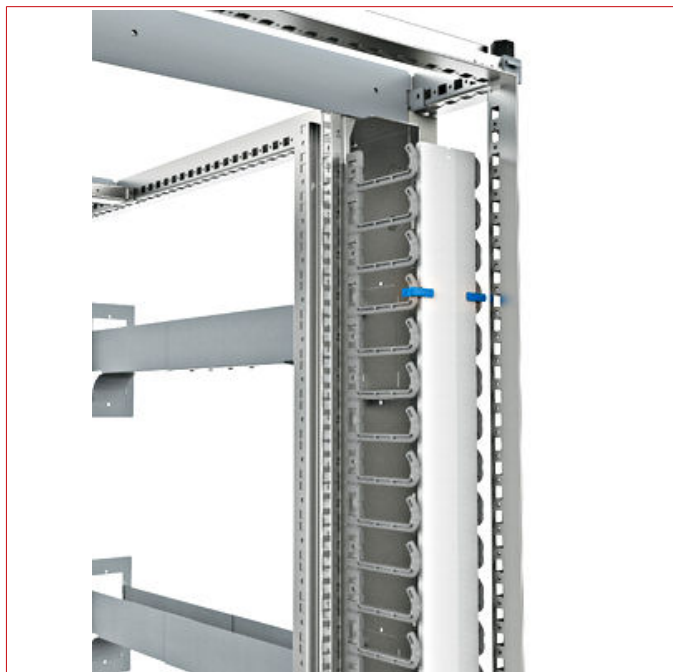

SCHRACK-Info

IS-1 cable manager, vert. 45U R9005 packed

Cabinet height: 2,200 mm

Dimensions of extension bracket: 90 x 112 mm (W x D)

Inside depth of the cable finger: 78 mm

Material/finish Channel: Sheet steel, powder-coated

Material of finger/clips: PC+ABS FR40

Fire behaviour: halogen-free; UL 94 V-0

Channel colour: RAL 7035 Light grey

Finger colour: RAL 9005 Jet black

Vertical cable manager for structured cable routing

in IS-1 cabinets. Large channel for storing excess lengths. Rounded 1U cable finger for safe guidance of fibre optic cables. Five cable entries each at the side and rear (knockout). Detachable, divided cap for closing the manager.

Note: Only for racks B700 (asymmetrical) and B800.

Comprising:

1 Vertical cable manager

18 Cable finger, 5x

2 Cap

Fitting material

Delivery condition: packed

Tehnički podaci

Neto masa (kg)	10,50
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	60

OPIS	KAT. BROJ
IS-1 okomita vodilica kabela 45U RAL9005 crna	HDCR100252