


Tehnički list za artikl: HLP03T002V

Optički završetak ST, 50/125µm OM3, 2.0m, 12 kom, klasa B

colored

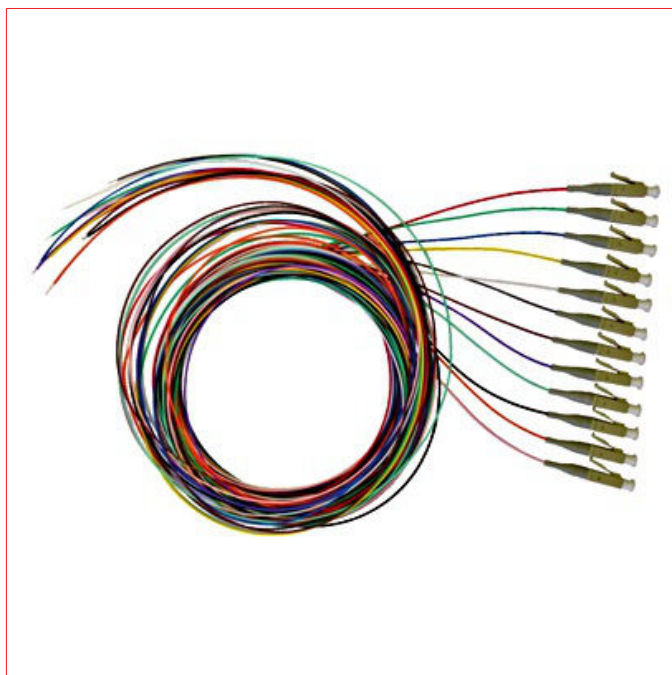

OM3

Tehnički podaci

Neto širina (mm)	120,00
Neto visina (mm)	15,00
Neto masa (kg)	0,12
Proizvod	Pigtail
Options	Set od 12
Max. strip length (mm)	1000
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	70
Insertion loss typical (dB)	0,12
Return loss typical (dB)	≥ 35
Vlakno (µm)	multimodno 50/125µm OM3
Primary coating (µm)	250
Secondary coating (µm)	900

Tehnički podaci - nastavak

Boja žile (set od 12) / IEC 60304	crvena, zelena, žuta, bijela, siva, smeđa, ljubičasta, tirkizna, crna, narančasta, roza
Fiber standard	IEC 60793-2-10
Connector type	ST
Plug color	metal
Ferrule diameter (mm)	2,5
Plugging cycles	500
Connector standard	IEC 61754-2
Tensile strength (N)	5
Standard	IEC 61753-1

Tablica artikla

OPIS	KAT. BROJ
Optički završetak ST, 50/125µm OM3, 2.0m, 12 kom, klasa B colored	HLP03T002V