



Tehnički list za artikl: HLP09D041P

FTTH opt. završetak SC/APC 8°, 9/ 125μm OS2 G657.A2, 1m, 4 kom

Easy Strip, u bojama prema IEC 60304, CLASSIC

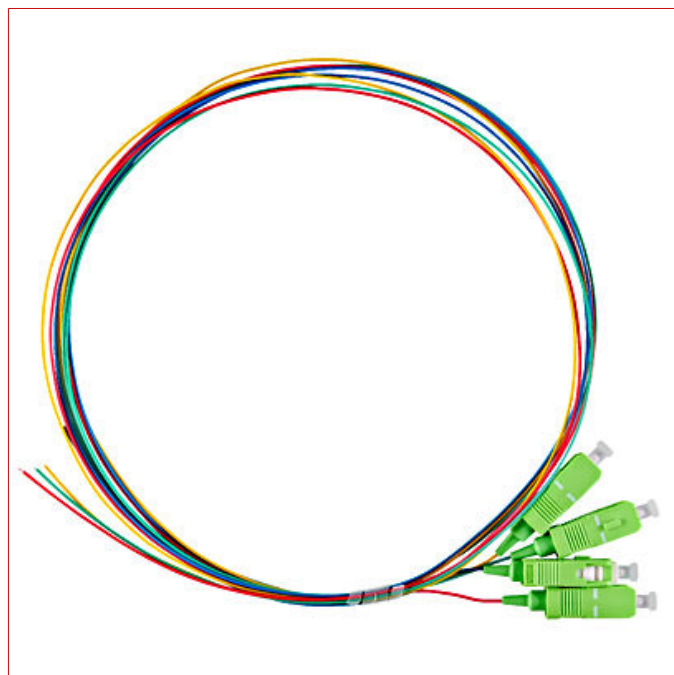


Schrack-Info

Assignment is crossed out.

Tehnički podaci

Neto širina (mm)	120,00
Neto visina (mm)	15,00
Neto masa (kg)	0,12
Norma	IEC 61300-3-4 / IEC 61300-3-6
Kombinacija utičnica	SC/APC
Tipovi utikača	SC/APC 8° Ferrule
Vlakno	9/125 OS2 Singlemode / G.657.A2
Vanjski omotač kabela	LSOH
Insercijski gubitak tipično (dB)	≤0,25
Prigušenje povratnog toka tipično (dB)	≥60
Valna duljina (nm)	1310
Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	75

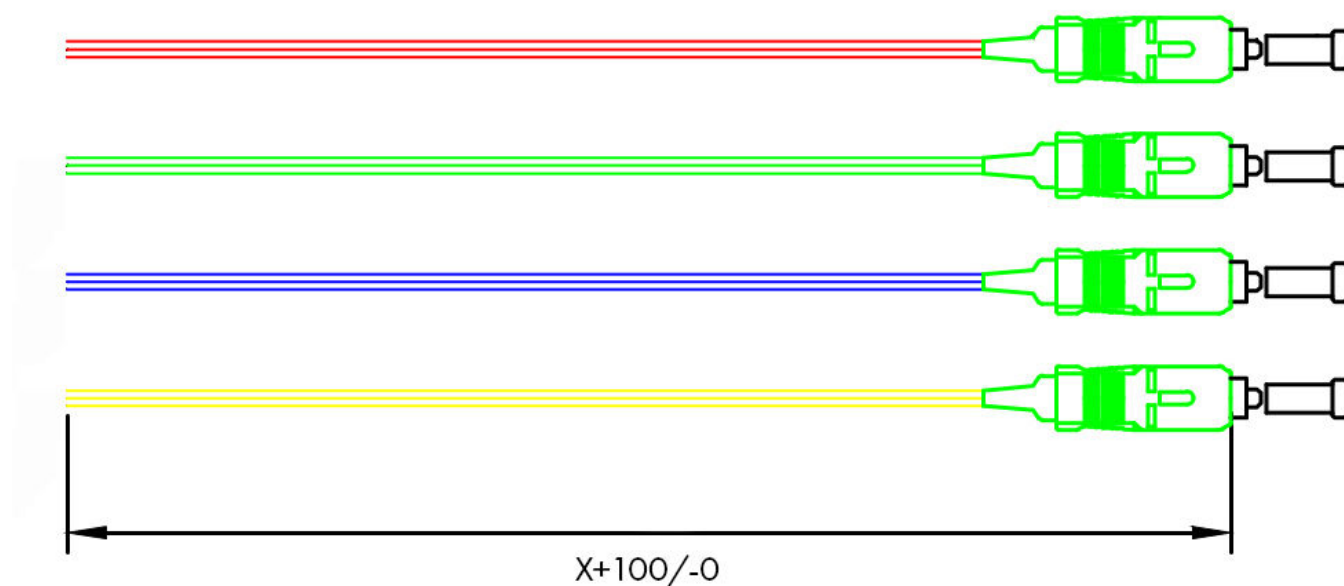Mjerne skice: FTTH opt. završetak SC/APC 8°, 9/125µm OS2 G657.A2, 1m, 4 kom

OPIS

KAT. BROJ

FTTH opt. završetak SC/APC 8°, 9/125µm OS2 G657.A2, 1m, 4 kom

HLP09D041P

Easy Strip, u bojama prema IEC 60304, CLASSIC