

Tehnički list za artikl: HSELS12SCG

Optički prespojni panel 19", 1U, uklj. 12 spojnica SC SM




RAL7035, PREMIUM



Tehnički podaci

Neto širina (mm)	482,50
Neto visina (mm)	43,60
Neto dubina (mm)	211,50
Neto masa (kg)	2,70
Vlakno	singlemodno 9/125µm OS2
Boja	RAL 7035 (svijetlo siva)
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	70

Dimension drawing

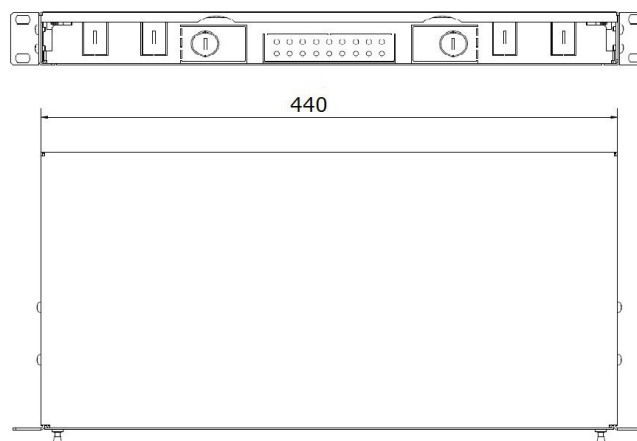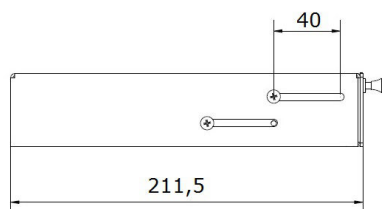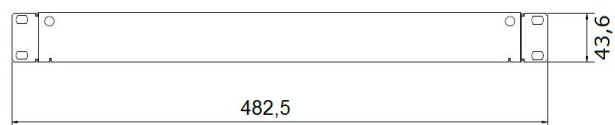

Tablica artikla

OPIS	KAT. BROJ
Optički prespojni panel 19", 1U, uklj. 12 spojnice SC SM RAL7035, PREMIUM	HSLS12SCG
Dodatni pribor	
Optički prespojni kabel DX SC/UPC-SC/UPC,9/125µm OS2,LS0H žuti, 2.0m	HLP29CC02F
Optički prespojni kabel DX SC/UPC-SC/UPC,9/125µm OS2,LS0H žuti, 5.0m	HLP29CC05F
Optički prespojni kabel DX LC/UPC-SC/UPC,9/125µm OS2,LS0H žuti, 2.0m	HLP29LC02F
Optički prespojni kabel DX LC/UPC-SC/UPC,9/125µm OS2,LS0H žuti, 5.0m	HLP29LC05F
Optički prespojni kabel DX ST/UPC-SC/UPC,9/125µm OS2,LS0H žuti, 2.0m	HLP29TC02F
Optički prespojni kabel DX ST/UPC-SC/UPC,9/125µm OS2,LS0H žuti, 5.0m	HLP29TC05F
Optički prespojni kabel DX SC/UPC-FC/UPC,9/125µm OS2,LS0H žuti, 2.0m	HLP29CF02F
Optički prespojni kabel DX SC/UPC-FC/UPC,9/125µm OS2,LS0H žuti, 5.0m	HLP29CF05F