

Tehnički list za artikl: HSEMRHDMWS

TOOLLESS LINE HDMI spojnica, bijela, HDMI A - HDMI A

HDMI A ženski - HDMI A ženski



SCHRACK info

ELECTRICAL PROPERTIES

- Resistance of the connector: 30mΩ max.
- Electrical insulation resistance: 100M min.@500VDC
- Rated current and voltage: 0.5A and 40V
- Puncture resistance: 500VAC / 1 minute
- Insulation resistance:
 - Unmated: 100M min. @500VDC
 - Mated: 10MΩ min. @150VDC

MECHANICAL PROPERTIES

- Plug-in cycles: 5000
- Insertion force: 44.1N max.
- Min. Extraction force: 5.9N min. / 39.2N max.
- Contact force: 5,9N / Pin min.
- Color: white

TEHNIČKI PODACI

- HDMI 19P FEMALE
- Housing: ABS 94V0
- PCB: FR-4 tin plated (lead free)
- Contact carrier: thermoplastic, black
- Pins: copper alloy, nickel and gold plated
- Connector: brass, gold plated
- Operating temperature: -20°C....+65°C

PACKAGING INFORMATION

- Weight: 0,011 kg
- Single piece in Polypack
- 10 pieces in overpack



DIMENSIONS

- 35,0 x 16,2 x 19,3

Tehnički podaci

Neto širina (mm)	17,00
Neto visina (mm)	19,30
Portovi	1
Neto duljina (mm)	35,00
Neto masa (kg)	0,01
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	65

Mjerne skice: TOOLLESS LINE HDMI spojnica, bijela, HDMI A - HDMI A

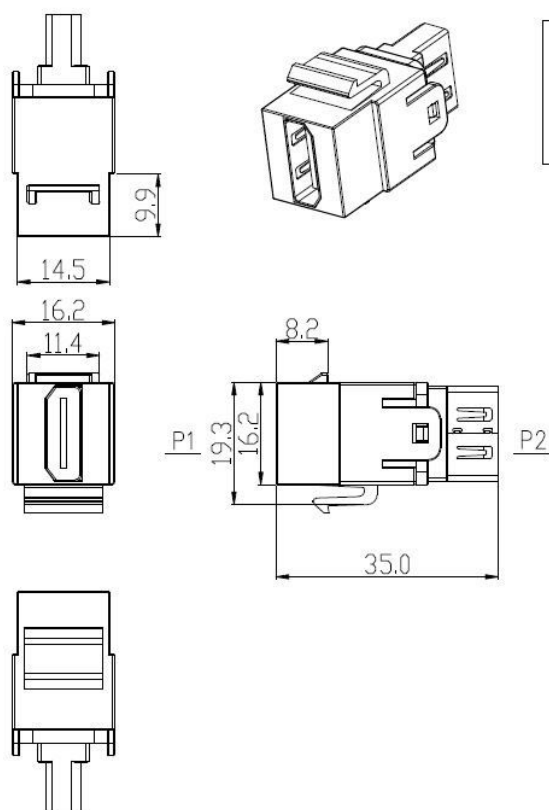

P1		P2
1	—	1
2	—	2
3	—	3
4	—	4
5	—	5
6	—	6
7	—	7
8	—	8
9	—	9
10	—	10
11	—	11
12	—	12
13	—	13
14	—	14
15	—	15
16	—	16
17	—	17
18	—	18
19	—	19
SHELL	—	SHELL

NOTES:

1. ELECTRICAL CHARACTERISTICS :

- 3.1 RATING CURRENT: 0.5A;
- 3.2 RATING VOLTAGE: 40V;
- 3.3 CONTACT RESISTANCE: 30m OHMS MAX.
- 3.4 INSULATION RESISTANCE:
- a:UNMATED: 100M OHMS MIN.AT 500 VDC
- b:MATED: 10M OHMS MIN.AT 150 VDC
- 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC/1MINUTE
- 3.6 OPERATING TEMPERATURE: -20°C---+85°C
- 3.7 STORAGE TEMPERATURE: -20°C---+65°C
- 3.8 OPERATION /STORAGE HUMIDITY:95% OR LESS.

2. MECHANICAL CHARACTERISTICS :

- 2.1 INSERTION FORCE : 44.1N(MAX)
- 2.2 EXTRACTION FORCE: 9.8N(MIN)-39.2N(MAX)
- 2.3 MATING CYCLE: 5000 CYCLES:
- 2.4 CONTACT PULL OUT FORCE: 5.9N/PIN(MIN)
- 2.5 PLASTIC MATERIAL: ABS 94V-0.

3. HOUSING: ABS 94V0

4. PCB: FR-4 Tin PLATING (LEAD FREE)

5. CONN: HDMI 19P FEMALE

- INSULATION: ENGINEERING THERMOPLASTIC BLACK;
- CONTACT: COPPER ALLOY, GOLD OVER NICKEL PLATED;
- SHELL: BRASS, GOLD FLASH PLATING

Tablica artikla

OPIS	KAT. BROJ
TOOLLESS LINE HDMI spojnica, bijela, HDMI A - HDMI A	
HDMI A ženski - HDMI A ženski	HSEMRHDMWS
Dodatni pribor	
HDMI adapter 90°, HDMI A muški - HDMI A ženski	Q7AH0005-A
Prespojni panel 19", prazan, za 24 modula (SFA)(SFB), 1U svjetlo siva, jezičac prespojnog kabela okrenut prema dolje	HSEMR240GS
Priključnica prazna 80x80 za 2 modula (SFA/B), ravan izvod čisto bijela	HSED02UW1S
Nosač za 2 modula, 45x45mm, kosi izvod, RAL9010	HSEMD02W2F
NAPOMENA: za integraciju ovog nosača u modularni sustav (VISIO 45) potreban adapter ET105083--	
HDMI 1.4 kabel, 2xHDMI19 tipA muški, pozlaćeni kontakti, 2m	Q7175025
HDMI 1.4 kabel, 2xHDMI19 tipA muški, pozlaćeni kontakti, 5m	Q7175027
HDMI 1.4 kabel, 2xHDMI19 tipA muški, pozlaćeni kontakti, 10m	Q7175029
HDMI 1.4 kabel, 2xHDMI19 tip A muški, Ferit/Gold, crni, 15m	Q7131912
HDMI 1.4 kabel, 2xHDMI19 tipA muški, pozlaćeni kontakti, 3m	Q7151834

Tablica artikla

OPIS	KAT. BROJ
Dodatni pribor	
HDMI 1.4 kabel, 2xHDMI19 tipA muški, pozlaćeni kontakti, 5m	Q7151835
HDMI 1.4 kabel, 2xHDMI19 tipA muški, pozlaćeni kontakti, 10m	Q7151837