


Tehnički list za artikl: HSEUBH049T

Univer.opt.kabel A/I-DQ(ZN)BH 4x9/125µm OS2, LS0H-3, Dca

Drum 2100m

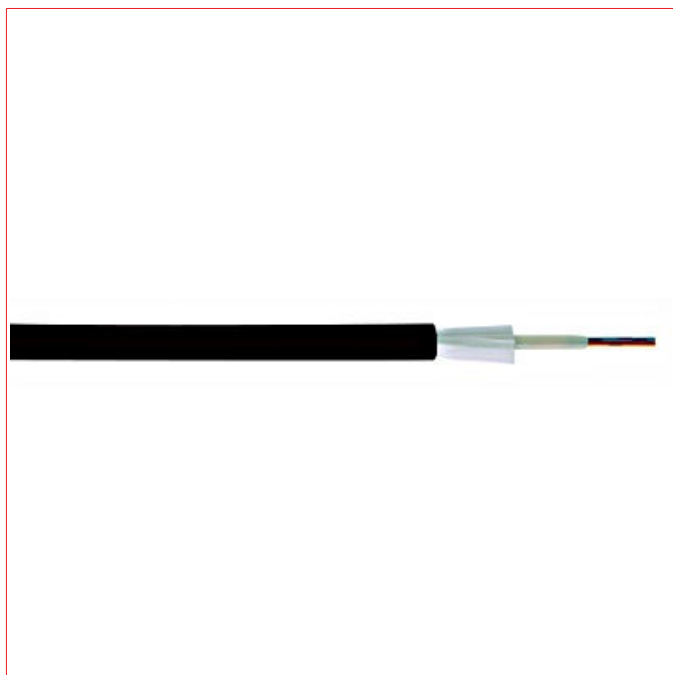

Tehnički podaci

Broj vlakana	4
Neto promjer (mm)	7,90
Diameter - Central tube (mm)	4
Primary coating (µm)	250 ± 15
Neto masa (kg)	0,07
Suitable	Universal cable
Watertightness	Yes
Rodent protection	Yes
Predicted lifetime	> 30 Years
Crush resistance (N/m)	≤ 10000
Vanjski omotač kabela	LS0H-3
Flame retardancy	Pass
Halogen-free	pH ≥ 3,5 - µS/cm ≤ 100
Smoke Density	Pass

Tehnički podaci - nastavak

Euroclass acc. to EN50575	Dca
Smoke production	s2
Droplets	d1
Acidity	a1
Temperature range - Transport/storage (°C)	-30 to +70
Temperature range - Installation (°C)	-5 to +50
Temperature range - Operation (°C)	-30 to +70
Pulling tension - Long term (N)	≤ 2500
Pulling tension - Short term (N)	≤ 5000
Bending radii cable - Static (Ø)	10 x Ø
Bending radii cable - Dynamic (Ø)	15 x Ø
Bending radii for fibres and tubes (Ø)	> 25
Mode-Field / Cladding diameter (µm)	9,2 ± 0,4 125 ± 0,7
Wavelength (nm)	1310 1383 1550 1625
Attenuation (dB/km)	0,34 0,31 0,21 0,24
Dispersion (ps/nm-km)	≤ 3,5 ≤ 18
Ehternet performance 1GB (m)	> 5000 - >70000 -
Ehternet performance 10GB (m)	> 10000 - > 40000 -
PMD (ps/km)	≤ 0,2
Cable Cutt-off-Wavelength (nm)	≤ 1260
Refractive Index	1,467 - 1,467 1,467

GUIDE TO INSTALLATION AND HANDLING

- When laying and installing optical fibre cables it is vitally important not to exceed the specified values set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used.
- The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Tablica artikla

OPIS	KAT. BROJ
Univer.opt.kabel A/I-DQ(ZN)BH 4x9/125µm OS2, LS0H-3, Dca Drum 2100m	HSEUBH049T
Dodatni pribor	
Opt. razdjelnik, 4 niti, LC, 9/125µm OS1, izvlačivi, 19", 1U	HSELS049LG
Opt. razdjelnik, 4 niti, SC, 9/125µm OS1, izvlačivi, 19", 1U	HSELS049CG
Opt. razdjelnik, 4 niti, FC, 9/125µm OS1, izvlačivi, 19", 1U	HSELS049FG