


Tehnički list za artikl: HSKP4233P5

S/FTP kabel

cat.7, 4x2xAWG23/1, 1.000MHz, LS0H-3, Dca, 30%, plavi

Bubanj 500m

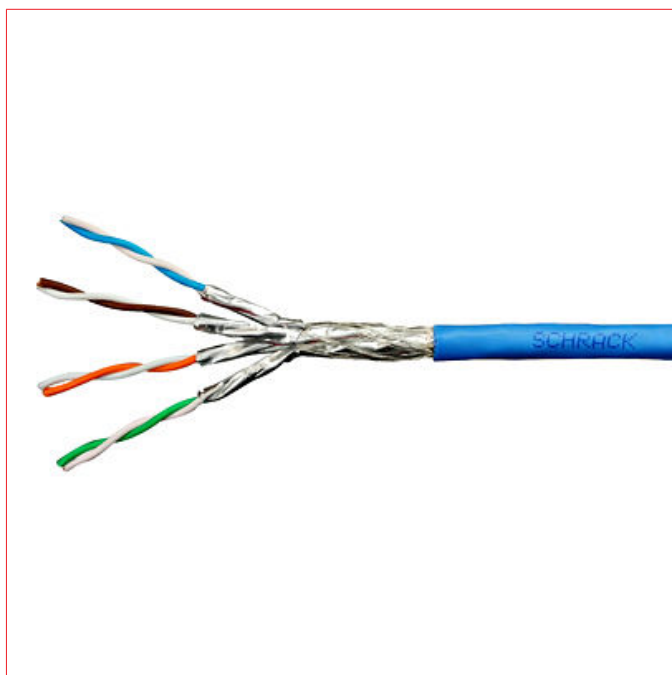

SCHRACK-Info

- Installation cable for generic cabling systems.
- Support current and future applications requiring Class D to F (z.B. 10GBase-T, 1000Base-T, 100Base-TX, ATM) as well as VoIP, PoE,

STANDARDS:

- ISO/IEC 11801, EN 50173-1
- Better than category 7 according to IEC 61156-5, EN 50288-4-1
- Much better than IEEE 802.3an 10 Gigabit Ethernet



Tehnički podaci

Kategorija	Cat.7
Kabelski oklop	S/FTP
Materijal vodiča	Solid bare copper AWG23/1 (0.58mm)

Tehnički podaci - nastavak

Boja	Pair 1 White / Blue Pair 2 White / Orange Pair 3 White / Green Pair 4 White / Brown
Broj parica	4, all twisted together
Insulation material	Foamed polyethylene
Nominal diameter over insulation (mm)	1,45
Oklop	Oklopljen
Pair-Foil	Laminated aluminium polyester, Aluminium facing outside (PiMF)
Overall Shield	Solid tinned copper
Braid coverage (%)	30
Ripcord	Nylon
Vanjski omotač kabela	LS0H-3
Plast/omotač	LS0H-3, FRNC according to: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-3-24, EN 60332-3-24
Euroclass acc. to EN50575	Dca
Smoke production	s1
Droplets	d1
Acidity	a1
Požarno opterećenje (kJ/m)	750
Outside diameter (mm)	7,9
Weight nominal (kg/km)	62
Sheath colour	blue, RAL 5015
Boja	plava
Duljina/pakiranje	500m - bubanj
Min. temperatura okoline (°C)	-30
Maks. temperatura okoline (°C)	60
Radna temperatura (°C)	-30 to +60
Temperature range - Installation (°C)	+0 to +50
Bending radii cable - Operation (longterm) (Ø)	4
Bending radii cable - Installation (shortterm) (Ø)	8
Max. pulling tension (N)	110
Nazivni napon	72 VDC
Max. continuous current per conductor (25°C) (A)	1,5
DC resistance at 20° C (Ohm/100m)	< 9,5
Resistance unbalance: within a pair / between pairs (%)	< 2 / < 4
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 5000
Dielectric strength conductor – conductor (2 sec) (kV DC)	2,5
Dielectric strength conductor – screen (2 sec) (kV DC)	2,5
Mutual capacitance (nF/km)	< 56

Tehnički podaci - nastavak

Capacitance unbalance pair to ground (pF/km)	< 1600
NVP (%)	78
Neto duljina (mm)	1.000,00
Neto masa (kg)	0,06
Neto promjer (mm)	7,90

ELEKTRIČKE KARAKTERISTIKE PRI 20°C PREMA IEC 61156-5

	Frekvencija (MHz)	Specifikacija	Jed.
NVP (nazivna brzina propagacije)	4 – 600	0,78	c
Skew (razlika između kašnjenja signala)	4 – 600	≤ 25	ns/100m
Kašnjenje signala zbog propagacije	4 – 600	≤ 534 + 36/Vf	ns/100m
Prigušenje	4 – 600	≤ 1,8 * Vf + 0,01 * f + 0,20/Vf	dB
TCL, level 1 (gubici zbog nesimetrije na bližem kraju)	1 – 250	> 40 – 10 * log (f)	dB
ELTCL (jednaka razina gubitaka zbog nesimetrije na daljnjem kraju)	1 – 30	> 35 – 20 * log (f)	dB
NEXT (preslušavanja na bližem kraju)	4 – 600	≥ 102,4 - 15 * log (f) (78 maks.)	dB
PS NEXT (zbroy preslušavanja na bližem kraju)	4 – 600	≥ 99,4 - 15 * log (f) (75 maks.)	dB
ACR-N (odnos prigušenje i preslušavanja na bližem kraju)	4 – 600	NEXT – prigušenje	dB
PS ACR-N (odnos prigušenja i gubitaka zbog preslušavanja na bližem kraju)	4 – 600	PSNEXT – prigušenje	dB
ACR-F (odnos prigušenje i preslušavanja na daljnjem kraju)	4 – 600	≥ 95,3 - 20 * log (f) (78 maks.)	dB
PS ACR-F (odnos prigušenja i gubitaka zbog preslušavanja na daljnjem kraju)	4 – 600	≥ 92,3 - 20 * log (f) (75 maks.)	dB
Ulazna impedancija za otvorene / kratko spojene parice (Zo/s)	4 – 600	100	Ω
RL (gubici zbog povratnog signala)	4 ≤ f ≤ 10	≥ 20 + 5 * log (f)	dB
	10 ≤ f ≤ 20	≥ 25	dB
	20 ≤ f ≤ 600	≥ 25 - 7 * log (f/20)	dB
Gubici zbog spojeva (tip I)	30 – 100	≥ 55	dB
	100 – 1000	≥ 55 - 20 * log (f/100)	dB
Impedancija na spojevima (ZT, grade 1)	1	< 50	mΩ/m
	10	< 100	mΩ/m
	30	< 200	mΩ/m
	100	< 1000	mΩ/m

STANDARD: IEC 61156-5

Frekvencija	1 *	4	10	16	31,2	62,5	100	125	200	250	300	600	1000*	MHz
Prigušenje	2	3,7	5,9	7,4	10,4	14,9	19	21,4	27,5	31,0	34,2	50,1	66,9	dB/100m
NEXT	78	78	78	78	78	75,5	72,4	70,9	67,9	66,4	65,2	60,7	57,4	dB/100m
PS NEXT	75	75	75	75	75	72,5	69,4	67,9	64,9	63,4	62,2	57,7	54,4	dB/100m
ACR-N	76,0	74,3	72,1	70,6	67,6	60,6	53,4	49,6	40,4	35,5	40,4	10,6	-9,5	dB/100m
PS ACR-N	73	71,3	69,1	67,6	64,6	57,6	50,4	46,6	37,4	32,5	28,1	7,6	-12,5	dB/100m
ACR-F	78	78	75,3	71,2	65,4	59,4	55,3	53,4	49,3	47,3	45,8	39,7	35,3	dB/100m
PS ACR-F	75	75	72,3	68,2	62,4	56,4	52,3	50,4	46,3	44,3	42,8	36,7	32,3	dB/100m
RL	20	23	25	25	23,6	21,5	20,1	19,4	18	17,3	17,3	17,3	17,3	dB/100m
TCL level 1	40	34	30	28	25,1	22	20	19	17	16				dB/100m
EL TCTL	35	23	15	10,9	5,1									dB/100m
Impedancija gornja granica	122,2	115,2	111,9	111,9	114,1	118,3	121,9	123,9	128,8	131,5	131,6	131,6	142,8	Ω
Impedancija donja granica	81,6	86,8	89,4	89,4	87,7	84,5	82,0	80,7	77,7	76	76	76	70	Ω
Kašnjenje signala	570	552	545	543	540	539	538	537	536	536	536	535	535	ns/100m

* Vrijednosti ispod 4 MHz i vrijednosti pri 1000 MHz su informativne.



TIPIČNE VRIJEDNOSTI

Frekvencija	1 *	4	10	16	31,3	62,5	100	125	200	300	600	1000	MHz
Prigušenje	1,8	3,3	5,3	6,7	9,4	13,4	17,1	19,3	26,7	30,8	45,5	60,3	dB/100m
NEXT	103	100	98	97	95	94	93	92	91	90	89	88	dB/100m
PS NEXT	100	97	95	94	92	91	90	89	88	87	86	85	dB/100m
ACR-N	101	97	93	91	85	81	76	71	64	59	43	28	dB/100m
PS ACR-N	98	94	90	88	82	78	73	70	61	56	40	25	dB/100m
ACR-F	95	94	93	91	90	87	85	83	77	74	60	50	dB/100m
PS ACR-F	92	91	92	88	87	84	82	80	74	71	57	47	dB/100m
RL	27	30	32	32	35	33	32	31	30	25	23	21	dB/100m

Tipične vrijednosti su samo za informaciju.

Tablica artikla

OPIS	NVP (%)	MASA BAKRA (kg/km)	KAT. BROJ
S/FTP kabel cat.7,4x2xAWG23/1,1.000MHz,LSOH-3,Dca,30%,plavi Bubanj 500m	78	25,5	HSKP4233P5
Dodatni pribor			
PERFORMANCE LINE RJ45 modul oklopljen,cat.6a 10GB 4PPoE 100W (SFB)			HSPMRJ6G1A
PERFORMANCE LINE RJ45 modul oklopljen, klase Ea 10GB PoE+ (SFB)			HSPMRJ6G1T
TOOLLESS LINE modul RJ45 oklop., cat.6a 10GB, 4PPoE 100W SFA (SFA)			HSEMRJ6GWA
TOOLLESS LINE modul RJ45 oklop., kl. Ea 10GB, 4PPoE 100W SFA (SFA)			HSEMRJ6GWT
TOOLLESS LINE utični modul RJ45 cat.6, oklopljen (SFA)			HSEMRJ6GWS
Nosač kabel. bubnja pri odmatanju,do 250kg,bubanj do 52cm			HTOOL00006
Čičak vezica plava 16mm x 4m			Q7KB0416-B
Čičak vezica crvena 16mm x 4m			Q7KB0416-R
Čičak vezica crna 16mm x 4m			Q7KB0416-S
Čičak vezica žuta 16mm x 4m			Q7KB0416-Y
Čičak vezica zelena 16mm x 4m			Q7KB0416-U