


Tehnički list za artikl: IKBC4016-A

Main branch terminal, 4-p., 125A, in 2x25mm², out 5x6mm²

4-pole, Input 2 x 10-25mm² (10-16mm² with ferrule), Outgoings 5 x 2,5-6mm² (2,5-4mm² with ferrule)

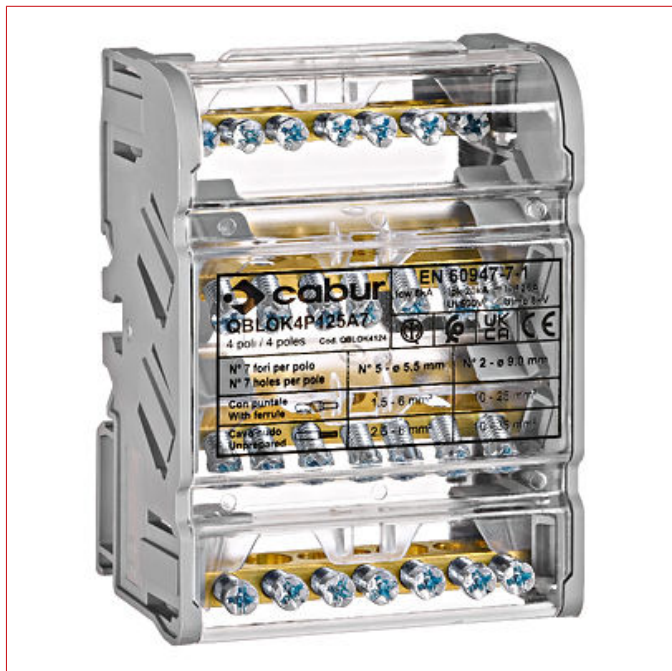

Tehnički podaci

Neto dubina (mm)	97,00
Neto širina (mm)	72,00
Neto visina (mm)	52,00
Neto masa (kg)	0,24
EAN	9007985008275
Disipacija snage (W)	2,40
Osnovna oznaka	Stežaljka

Main branch terminal, 4-p., 125A, in 2x25mm², out 5x6mm²

4-pole, Input 2 x 10-25mm² (10-16mm² with ferrule), Outgoings 5 x 2,5-6mm² (2,5-4mm² with ferrule)

IKBC4016-A