


Tehnički list za artikl: IL153528GS

Masken-Zählerverteiler 5M-28E/STMK 5ZP, H1335B1180T200mm

5 Mjesta za brojila, 1 Redova brojila, 4 Daljnji redovi, 228 Modularnih širina, Pokrovna ploča Čelik, Štajerska

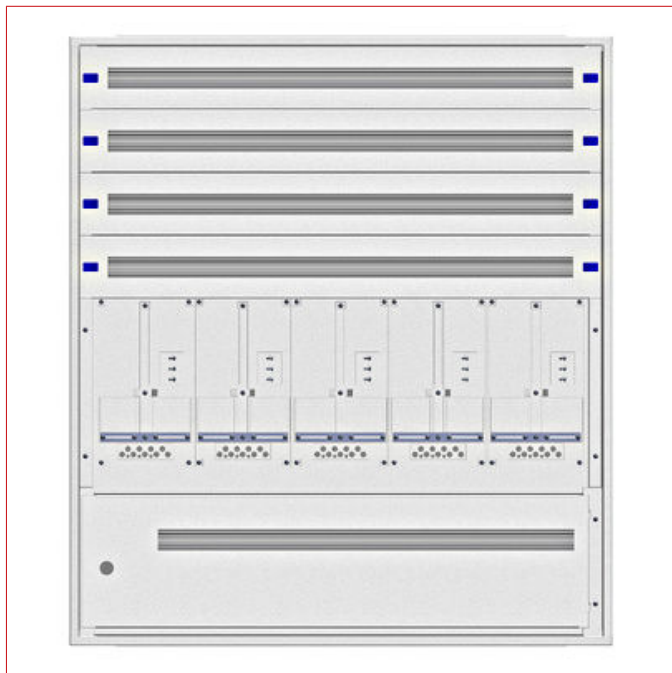

SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungskurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungskurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



Tehnički podaci

Neto širina (mm)	1.180,00
Neto visina (mm)	1.335,00
Neto dubina (mm)	200,00
EAN	9004840635973
Disipacija snage (W)	-581,00
Tip	Maskirni razdjelnik sa brojilom (komplet)
Austrijske pokrajine	Štajerska
Umetci	Prednja maska metalna
Boja	RAL 7035
Širina brojila	5
Visinska jedinica	28
Redova brojila	1
Mjesta za brojila	5
IP stupanj zaštite	IP20C
Daljnji redovi	4
Pokrovna ploča	Čelik
Osnovna oznaka	Kućište
Modularnih širina	228

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Masken-Zählerverteiler 5M-28E/STMK 5ZP, H1335B1180T200mm		
5 Mjesta za brojila, 1 Redova brojila, 4 Daljnji redovi, 228 Modularnih širina, Pokrovna ploča		IL153528GS
Čelik, Štajerska		
Dodatni pribor		
Postolje za nazidne razdjelnike, bočni dio, 200mm (par)		IL091120
Podnožje, prednji dio, za razdjelnike 5A../.		IL091050
Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva		BK002401
Pokrovna traka, slijepa, glatka, siva, duljine 1m		IL900251
pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi		

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Dodatni pribor		
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824