


Tehnički list za artikl: IL154428GS

# Masken-Zählerverteiler 4M-28G/STMK 8ZP, H1335B980T200mm

8 Mjesta za brojila, 2 Redova brojila, 1 Daljnji redovi, 45 Modularnih širina, Pokrovna ploča  
Čelik, Štajerska

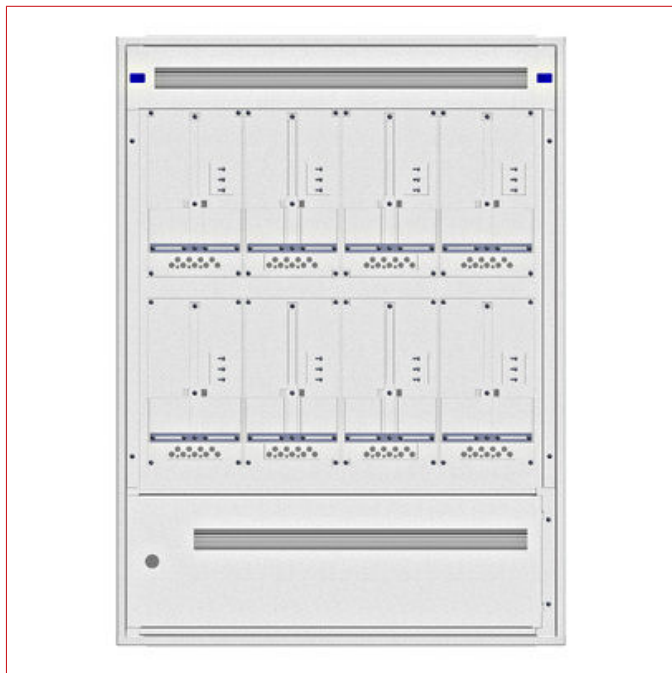

## SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungskurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungskurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



## Tehnički podaci

|                      |                                           |
|----------------------|-------------------------------------------|
| Neto širina (mm)     | 980,00                                    |
| Neto visina (mm)     | 1.335,00                                  |
| Neto dubina (mm)     | 200,00                                    |
| EAN                  | 9004840637083                             |
| Disipacija snage (W) | -498,00                                   |
| Tip                  | Maskirni razdjelnik sa brojilom (komplet) |
| Austrijske pokrajine | Štajerska                                 |
| Umetci               | Prednja maska metalna                     |
| Boja                 | RAL 7035                                  |
| Širina brojila       | 4                                         |
| Visinska jedinica    | 28                                        |
| Redova brojila       | 2                                         |
| Mjesta za brojila    | 8                                         |
| IP stupanj zaštite   | IP20C                                     |
| Daljnji redovi       | 1                                         |
| Pokrovna ploča       | Čelik                                     |
| Osnovna oznaka       | Kućište                                   |
| Modularnih širina    | 45                                        |

## Tablica artikla

| OPIS                                                                                          | MASA BAKRA (kg/km) | KAT. BROJ  |
|-----------------------------------------------------------------------------------------------|--------------------|------------|
| Masken-Zählerverteiler 4M-28G/STMK 8ZP, H1335B980T200mm                                       |                    |            |
| 8 Mjesta za brojila, 2 Redova brojila, 1 Daljnji redovi, 45 Modularnih širina, Pokrovna ploča |                    | IL154428GS |
| Čelik, Štajerska                                                                              |                    |            |
| <b>Dodatni pribor</b>                                                                         |                    |            |
| Postolje za nazidne razdjelnike, bočni dio, 200mm (par)                                       |                    | IL091120   |
| Podnožje, prednji dio, za razdjelnike 4A../.                                                  |                    | IL091040   |
| Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva                                   |                    | BK002401   |
| Pokrovna traka, slijepa, glatka, siva, duljine 1m                                             |                    | IL900251   |
| pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                   |                    |            |

## Tablica artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | KAT. BROJ  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |