


Tehnički list za artikl: IL160445TS

# Aufputz-Zählerverteiler 4A-45E/TIR 4ZP, H2160B1030T250mm

4 Mjesta za brojila, 1 Redova brojila, 7 Daljnji redovi, 315 Modularnih širina, Pokrovnna ploča  
Čelik, Tirol

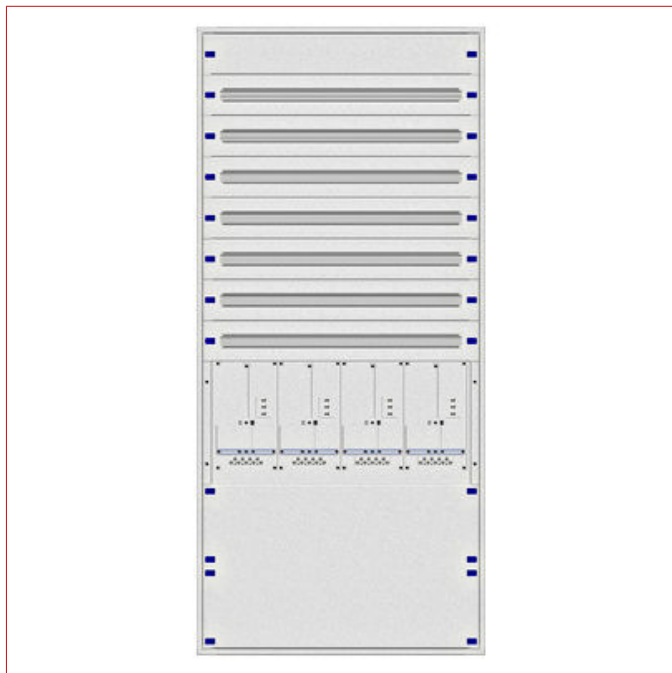

## SCHRACK-Info

- Modular aufgebauter Aufputzverteiler mit Tür und PVC-Rückwand
- Material: 1,25mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit Kunststoff-Drehriegelverschluss mit Doppelbartsperr
- Die Ausführung des Vorzählerteils besteht aus einer plombierbaren Abdeckung mit montierter Alu/HC Schiene und einer Montageplatte ab 4 Zählerplätze
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungskurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungskurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



## Tehnički podaci

|                      |                                                   |
|----------------------|---------------------------------------------------|
| Neto širina (mm)     | 1.030,00                                          |
| Neto visina (mm)     | 2.160,00                                          |
| Neto dubina (mm)     | 250,00                                            |
| EAN                  | 9004840657883                                     |
| Disipacija snage (W) | -856,00                                           |
| Tip                  | Nazidni razdjelnik s umetkom za brojila (komplet) |
| Austrijske pokrajine | Tirol                                             |
| Umetci               | Prednja maska metalna                             |
| Boja                 | RAL 7035                                          |
| Širina brojila       | 4                                                 |
| Visinska jedinica    | 45                                                |
| Redova brojila       | 1                                                 |
| Mjesta za brojila    | 4                                                 |
| IP stupanj zaštite   | IP20C                                             |
| Daljnji redovi       | 7                                                 |
| Pokrovn ploča        | Čelik                                             |
| Osnovna oznaka       | Kućište                                           |
| Modularnih širina    | 315                                               |

## Tablica artikla

| OPIS                                                                                                                                                                                                                                                                                                                                                                 | MASA BAKRA (kg/km) | KAT. BROJ  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Aufputz-Zählerverteiler 4A-45E/TIR 4ZP, H2160B1030T250mm<br>4 Mjesta za brojila, 1 Redova brojila, 7 Daljnji redovi, 315 Modularnih širina, Pokrovna ploča<br>Čelik, Tirol                                                                                                                                                                                           |                    | IL160445TS |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                                                                                                |                    |            |
| Postolje za nazidne ormare dubine 250mm, bočni dijelovi<br>visina 100mm, isporuka u paru (lijevi + desni bočni dio), mogućnost sastavljanja 2 postolja u<br>postolje visine 200mm, primjenjivi kod ormara u izvedbi IP20-C i IP54                                                                                                                                    |                    | IL091125   |
| Postolje za nazidne razdj. M2000, prednji dio, 4PB, U-profil<br>redizajnirani U-profil dubine 8 mm, 2 mm čelični lim                                                                                                                                                                                                                                                 |                    | IL091400-S |
| Brava 61005 za "Modul" razdjelnike<br>s jednim ključem                                                                                                                                                                                                                                                                                                               |                    | IL900200-F |
| Metalna cilindar brava H36000 za MODUL razdjelnike, 2 ključa<br>s dva ključa                                                                                                                                                                                                                                                                                         |                    | IL900202-F |
| Ploča za uvod kabela, 48 rupa 13-30mm, gumene uvodnice<br>426x130x15mm (ŠxVxD), za ormare IL001/006/009/036 širine 2,3, 4, 5. Kabelski prolazi:<br>28x13mm, 16x17mm i 4x30mm                                                                                                                                                                                         |                    | IL900102   |
| Ploča za uvod kabela, 18 rupa 18-30mm, gumene uvodnice<br>440x130x33mm (ŠxVxD), za ormare IL001/006/009/036 širine 2, 3, 4, 5. Kabelski prolazi:<br>18x (18-30)mm                                                                                                                                                                                                    |                    | IL900105   |
| Zidni nosači za sve nazidne razdjelnike Modul 2000                                                                                                                                                                                                                                                                                                                   |                    | IL900020-F |
| Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva                                                                                                                                                                                                                                                                                                          |                    | BK002401   |
| Pokrovna traka, slijepa, glatka, siva, duljine 1m<br>pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi                                                                                                                                                                                                                                                     |                    | IL900251   |
| Z-metalna cilindar brava za MODUL razdjelnike, 2 ključa<br>s dva ključa                                                                                                                                                                                                                                                                                              |                    | IL900201-F |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over<br>all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped<br>ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over<br>all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped<br>ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                      |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                       |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over<br>all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped<br>ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |

## Tablica artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | KAT. BROJ |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------|
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |           |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |           |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820  |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |           |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824  |