


Tehnički list za artikl: IL162533GS

Aufputz-Zählerverteiler 5A-33G/STMK 10ZP, H1605B 1230T250mmV1

10 Mjesta za brojila, 2 Redova brojila, 3 Daljnji redovi, 171 Modularnih širina, Pokrovna ploča Čelik, Štajerska

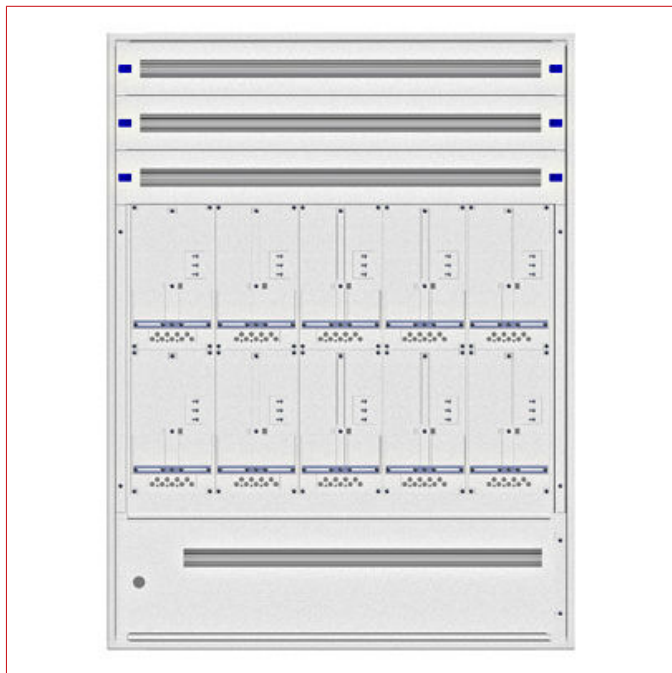

SCHRACK-Info

- Modular aufgebauter Aufputzverteiler mit Tür und PVC-Rückwand
- Material: 1,25mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit Kunststoff-Drehriegelverschluss mit Doppelbartsperr
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungskurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungskurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



Tehnički podaci

Neto širina (mm)	590,00
Neto visina (mm)	1.605,00
Neto dubina (mm)	250,00
EAN	9004840641516
Disipacija snage (W)	-754,00
Tip	Nazidni razdjelnik s umetkom za brojila (komplet)
Austrijske pokrajine	Štajerska
Umetci	Prednja maska metalna
Boja	RAL 7035
Širina brojila	5
Visinska jedinica	33
Redova brojila	2
Mjesta za brojila	10
IP stupanj zaštite	IP20C
Daljnji redovi	3
Pokrovn ploča	Čelik
Osnovna oznaka	Kućište
Modularnih širina	171

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Aufputz-Zählerverteiler 5A-33G/STMK 10ZP, H1605B 1230T250mmV1 10 Mjesta za brojila, 2 Redova brojila, 3 Daljnji redovi, 171 Modularnih širina, Pokrovna ploča Čelik, Štajerska		IL162533GS
Dodatni pribor		
Postolje za nazidne ormare dubine 250mm, bočni dijelovi visina 100mm, isporuka u paru (lijevi + desni bočni dio), mogućnost sastavljanja 2 postolja u postolje visine 200mm, primjenjivi kod ormara u izvedbi IP20-C i IP54		IL091125
Postolje za nazidne razdj. M2000, prednji dio, 5PB, U-profil redizajnirani U-profil dubine 8 mm, 2 mm čelični lim		IL091500-S
Brava 61005 za "Modul" razdjelnike s jednim ključem		IL900200-F
Metalna cilindar brava H36000 za MODUL razdjelnike, 2 ključa s dva ključa		IL900202-F
Ploča za uvod kabla, 48 rupa 13-30mm, gumene uvodnice 426x130x15mm (ŠxVxD), za ormare IL001/006/009/036 širine 2,3, 4, 5. Kabelski prolazi: 28x13mm, 16x17mm i 4x30mm		IL900102
Ploča za uvod kabla, 18 rupa 18-30mm, gumene uvodnice 440x130x33mm (ŠxVxD), za ormare IL001/006/009/036 širine 2, 3, 4, 5. Kabelski prolazi: 18x (18-30)mm		IL900105
Zidni nosači za sve nazidne razdjelnike Modul 2000		IL900020-F
Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva		BK002401
Pokrovna traka, slijepa, glatka, siva, duljine 1m pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi		IL900251
Z-metalna cilindar brava za MODUL razdjelnike, 2 ključa s dva ključa		IL900201-F
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Dodatni pribor		
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824