


Tehnički list za artikl: IL166233GS

Unterputz-Zählerverteiler 2U-33G/STMK 4ZP, H1605B590T250mmV1

4 Mjesta za brojila, 2 Redova brojila, 3 Daljnji redovi, 63 Modularnih širina, Pokrovna ploča
Čelik, Štajerska

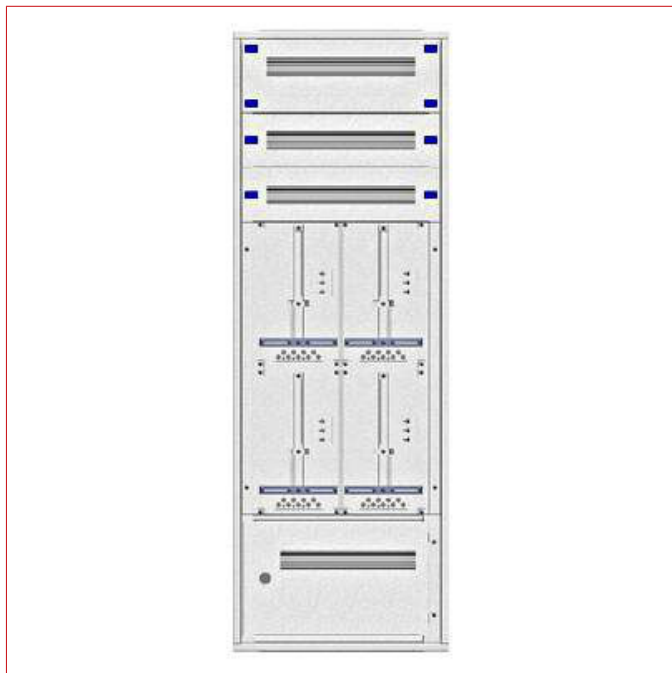

SCHRACK-Info

- Modular aufgebauter Unterputzverteiler mit Tür und Mauerwanne
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit einem Kunststoff-Drehriegelverschluss mit Doppelbartsperr. Beim IL308524-F und ab 28 Modulhöhen sind 2 Drehriegel pro Tür ausgeführt
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungs kurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungs kurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- Farbe: RAL9016 (Verkehrsweiß)

- komplett bestückt und vorverdrahtet auf Anfrage



Tehnički podaci

Neto širina (mm)	590,00
Neto visina (mm)	1.605,00
Neto dubina (mm)	250,00
EAN	9004840644340
Disipacija snage (W)	-352,00
Tip	Uzidni razdjelnik s umetkom za brojila (komplet)
Austrijske pokrajine	Štajerska
Umetci	Prednja maska metalna
Boja	RAL 9016
Širina brojila	2
Visinska jedinica	33
Redova brojila	2
Mjesta za brojila	4
IP stupanj zaštite	IP20C
Daljnji redovi	3
Pokrovna ploča	Čelik
Osnovna oznaka	Kućište
Modularnih širina	63

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Unterputz-Zählerverteiler 2U-33G/STMK 4ZP, H1605B590T250mmV1		
4 Mjesta za brojila, 2 Redova brojila, 3 Daljnji redovi, 63 Modularnih širina, Pokrovna ploča		IL166233GS
Čelik, Štajerska		
Dodatni pribor		
Brava 61005 za "Modul" razdjelnike s jednim ključem		IL900200-F
Traka za označavanje, visine 10mm/duljine 1m, samoljepljiva		BK002401
Pokrovna traka, slijepa, glatka, siva, duljine 1m		IL900251
pokrov praznih mjesta u razdjelniku, skraćivanje po potrebi		
Vertikalni spojni nosači		IL369001
2 kom. nosača i 4 kom. M5x12 vijaka		

Tablica artikla

OPIS	MASA BAKRA (kg/km)	KAT. BROJ
Dodatni pribor		
Z-metalna cilindar brava za MODUL razdjelnike, 2 ključa s dva ključa		IL900201-F
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824