

Tehnički list za artikl: IL372921US

Uzidni razdj., MODUL2000, ravna vrata, 3U-21, V=1055, Š=590, D=100

7 instalacijska reda, ukupno 147modula, IP20C



Tehnički podaci


Neto širina (mm)	590,00
Neto visina (mm)	1.055,00
Neto dubina (mm)	100,00
EAN	9004840886597
Disipacija snage (W)	-196,00
Tip	Uzidni razdjelnik s instalacijskim umetkom (komplet)
Austrijske pokrajine	Standard
Boja	RAL 9016 (prometna bijela)
Širina brojila	2
Visinska jedinica	21
IP stupanj zaštite	IP20C
Broj redova	7
Pokrovn ploča	Čelik
Osnovna oznaka	Kućište

Tehnički podaci - nastavak

Modularnih širina

147

Mjerne skice: Uzdni razdj., MODUL2000, ravna vrata, 3U-21, V=1055, Š=590, D=100

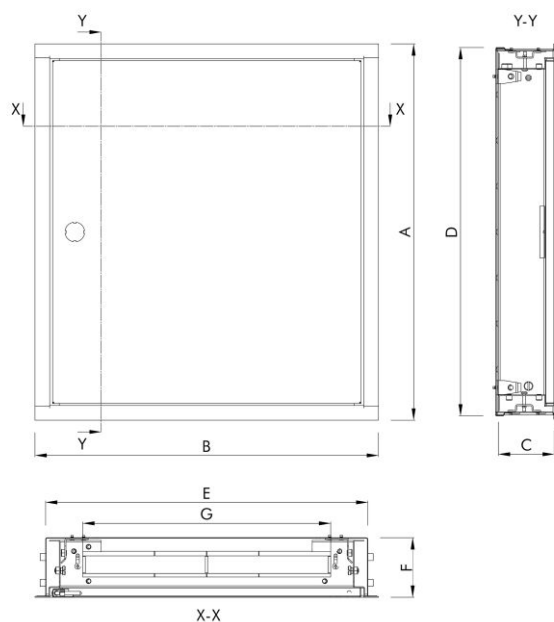

Podatkovna tablica: Uzdni razdj., MODUL2000, ravna vrata, 3U-21, V=1055, Š=590, D=100

Type	Artikelnummern		A	B	C	D	E	F	G	Verlustleistung
	Komplett	UP-Rahmen + Mauerwanne	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
2U12	IL372912US	IL312212-F + IL367212-F	640	586	97	630	550	100	423	-122
2U18	IL372918US	IL312218-F + IL367218-F	915	586	97	905	550	100	423	-171
2U21	IL372921US	IL312221-F + IL367221-F	1055	586	97	1045	550	100	423	-195
2U24	IL372924US	IL312224-F + IL367224-F	1190	586	97	1180	550	100	423	-220
3U12	IL372812US	IL312312-F + IL367312-F	640	806	97	630	770	100	643	-163
3U18	IL372818US	IL312318-F + IL367318-F	915	806	97	905	770	100	643	-228
3U21	IL372821US	IL312321-F + IL367321-F	1055	806	97	1045	770	100	643	-261
3U24	IL372824US	IL312324-F + IL367324-F	1190	806	97	1180	770	100	643	-294

* Max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandeinbau und einem $\Delta T = 35K$.

Detailinformationen und Rechtshinweise siehe Seite ?

OPIS

KAT. BROJ

Uzidni razdj., MODUL2000, ravna vrata, 3U-21, V=1055, Š=590, D=100

IL372921US

7 instalacijska reda, ukupno 147modula, IP20C