


Tehnički list za artikl: IL433242-A

# Zählerverteiler Einsatz 2-42M, 6 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

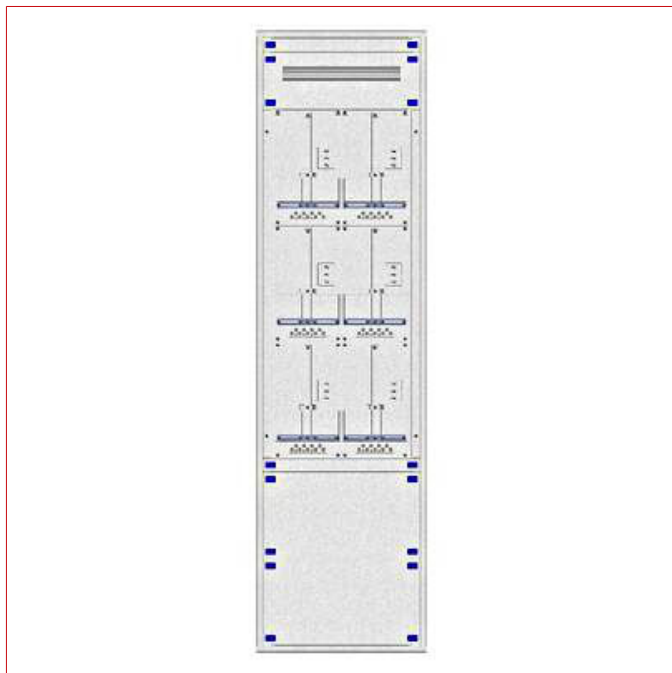

## Tehnički podaci

|                      |                                 |
|----------------------|---------------------------------|
| Neto širina (mm)     | 500,00                          |
| Neto visina (mm)     | 1.935,00                        |
| Neto dubina (mm)     | 150,00                          |
| EAN                  | 9004840967173                   |
| Tip                  | Umetak za razdjelnik s brojilom |
| Austrijske pokrajine | Tirol                           |
| Umetci               | Prednja maska metalna           |
| Boja                 | RAL 7035                        |
| Širina brojila       | 2                               |
| Visinska jedinica    | 42                              |
| Redova brojila       | 3                               |
| Mjesta za brojila    | 6                               |
| Daljnji redovi       | 1                               |
| Osnovna oznaka       | Umetak                          |

## Tablica artikla

| OPIS                                                                                                                                                                                                                                                                                           | MASA BAKRA (kg/km) | KAT. BROJ  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| Zählerverteiler Einsatz 2-42M, 6 Zählerplätze, Tirol                                                                                                                                                                                                                                           |                    | IL433242-A |
| Frontblende Stahlblech, komplett                                                                                                                                                                                                                                                               |                    |            |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                                                          |                    |            |
| Set za uzemljenje 300mm P/F 6mm <sup>2</sup> , ž-z                                                                                                                                                                                                                                             |                    | IL900099   |
| Kabel duljine 300mm; kabelski završetci, vijci, podložne pločice i matice (M6) sadržani u isporuci                                                                                                                                                                                             |                    |            |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                    | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                    | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                    | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350               | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                    |            |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725               | IL901824   |