

Tehnički list za artikl: IM009022--

Nazidni razdjelnik, 13 modula, prozirni poklopac, IP55

200x287x122mm (VxŠxD), mogućnost plombiranja, otpornost na udarce: IK09, stupanj samogasivosti: HB (UL94), ispitivanje na žarnu nit: 650°C, temperatura okoline: -15°C do +60°C

Sample Image



SCHRACK-Info

- With transparent hinged lid, 1-row 12MW
- Rated voltage 400VAC / In=63A
- Impact resistance: IK09
- Ambient temperature: -15° to +60°C
- Glow wire test: 650°C
- Knockouts: PG
- Material: polystyrole, halogen free
- RAL7035 light grey




Tehnički podaci

Neto širina (mm)	287,00
Neto visina (mm)	200,00

Tehnički podaci - nastavak

Neto dubina (mm)	124,00
Neto masa (kg)	1,21
EAN	9004840040364
Disipacija snage (W)	-21,00
Izvedba/tip	Nazidni sa vratima
Materijal vrata	Plastika
Broj redova	1
Modula u 1 redu	13
IP stupanj zaštite	IP55
Boja	RAL 7035

Mjerne skice: Nazidni razdjelnik, 13 modula, prozirni poklopac, IP55

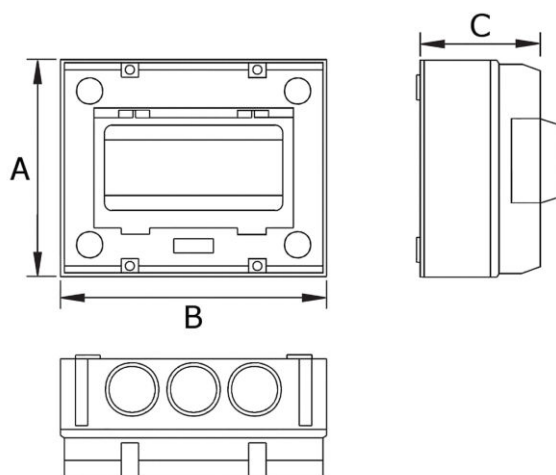

Podatkovna tablica: Nazidni razdjelnik, 13 modula, prozirni poklopac, IP55

Article number	A [mm]	B [mm]	C [mm]	Rows	MW	Knockouts top/bottom	Knockouts on the side	N-terminal [mm ²]	PE-terminal [mm ²]
IM009019	175	83	106	1	3	1x PG 16/21	-	4x6	4x6
IM009020	175	125	114	1	5	2x PG 16/21	2x PG 16/21	4x6	4x6
IM009021	175	215	114	1	8	3x PG 16/21	2x PG 16/21	2x10 + 6x6	2x10 + 6x6
IM009022	200	287	124	1	13	2x PG 11, 2x PG 21, 1x PG 29	-	2x10 + 10x6	2x10 + 10x6

* Information about max. radiate performance of enclosure, see technical tables in attachment from page?

Tablica artikla

OPIS	KAT. BROJ
Nazidni razdjelnik, 13 modula, prozirni poklopac, IP55 200x287x122mm (VxŠxD), mogućnost plombiranja, otpornost na udarce: IK09, stupanj samogasivosti: HB (UL94), ispitivanje na žarnu nit: 650°C, temperatura okoline: -15°C do +60°C	IM009022