

Pomoćni kontakt 1 N/O+1 N/C za INSE grebenaste sklopke

za INSE... Grebenaste sklopke




Tehnički podaci

Izvedba/tip	Pribor
Norma	IEC 60947, EN 60947, VDE 0660
Nazivni napon izolacije [Ui] (V)	500
Frekvencija (Hz)	50/60
Operating Current	AC-15 - 120V - 6A AC-15 - 230V - 3A DC-13 - 250V - 0.3A DC-13 - 125V - 1.1A AC-15 - 500V - 1.4A
Priključak	
Moment pritezanja (Nm)	1, 10
Presjek priključnih vodiča, višezilni kabel (mm²)	2x0,75-4
Presjek priključnih vodiča, Jednožični (mm²)	0,75-4
Presjek priključnih vodiča, finožični kabel s tuljkom (mm²)	2x0,75-4
Retrofit contacts	
Pomoćni kontakti	The number of auxiliary contacts that can be installed on the various switches is specified in detail in the respective data sheet for the item.




Tehnički podaci - nastavak

Radna temperatura	-25°C to +55°C
Mehanički životni vijek	100000 switching cycles
Gubitak snage po polu (W)	0,35
Zaštita od dodira	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
IP stupanj zaštite	IP20 (terminals)
Lockable	No
Neto duljina (mm)	32,00
Neto širina (mm)	50,00
Neto visina (mm)	10,60
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	55

Schaltbild INSHK002--



Maßbild INSHK002--

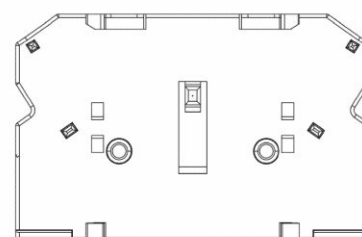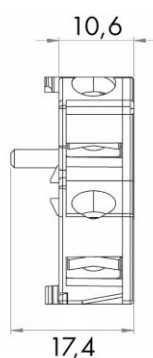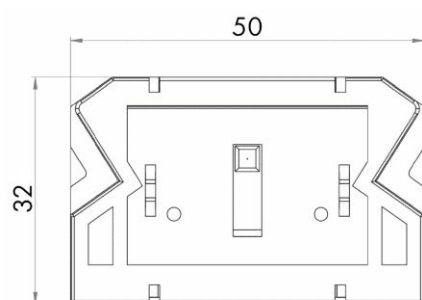

[mm]

OPIS	KAT. BROJ
Pomoćni kontakt 1 N/O+1 N/C za INSE grebenaste sklopke za INSE... Grebenaste sklopke	INSHK002