

Tehnički list za artikl: IS010130--

Odvodnik 3+0, TNC, T1, 275V Iimp=25kA/ pol, kontakt za sign.

integiran osigurač, utična izvedba




Tehnički podaci

Broj polova	3+0
Trajni napon (VAC)	275
Impulsna struja (kA)	25
Nazivna odvodna struja (kA)	25
Maks. struja pražnjenja (kA)	65
Razina zaštite (kV)	1900
Širina (broj modula)	6
Signalni kontakt	Da
Nazivni napon	240VAC
Nazivna prekidna moć	100
Specific Energy (kJ/Ω)	156,20
Charge (As)	12,50
Vrijeme odziva (ns)	<100
Overcurrent Protection (max) (A gG)	nicht notwendig
TOV SafeFail 120min (L-N) (V)	442
Follow Current Interrupt Rating (A)	100


Tehnički podaci - nastavak

Open Circuit Voltage of Combination Wave Generator (1,2/50 μ s) (kV)	6
Short Circuit Current of Combination Wave Generator (8/20 μ s) (kA)	3

Circuit diagram IS010130--

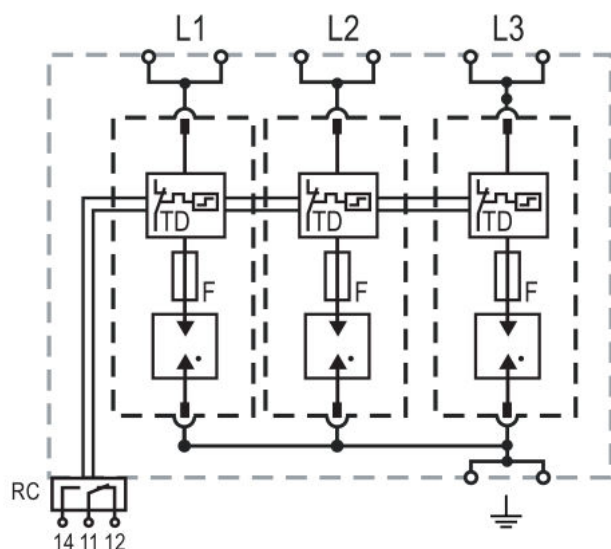

Dimension diagram IS010130-- [mm/inch]

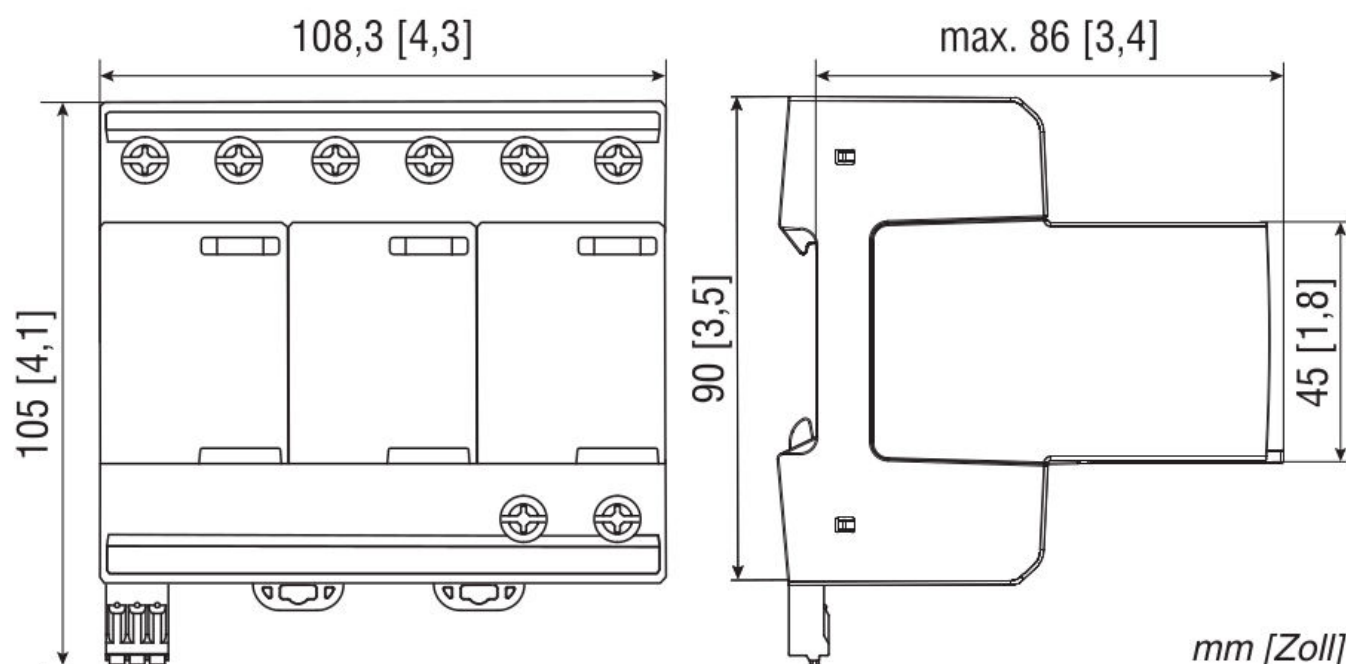

OPIS	KAT. BROJ
Odvodnik 3+0, TNC, T1, 275V Iimp=25kA/pol, kontakt za sign. integiran osigurač, utična izvedba	IS010130