

Tehnički list za artikl: IS010131--

Odvodnik 3+1, TNS, T1, 275V I_{imp}=25kA/ pol, kontakt za sign.

integiran osigurač, utična izvedba




Tehnički podaci

Broj polova	3+1
Trajni napon (VAC)	275(L-PE)/305(N-PE)
Impulsna struja (kA)	25(L-N)/100(N-PE)
Nazivna odvodna struja (kA)	25(L-N)/100(N-PE)
Maks. struja pražnjenja (kA)	65(L-N)/150(N-PE)
Razina zaštite (kV)	1900(L-PE)/1500(N-PE)
Širina (broj modula)	8
Signalni kontakt	Da
Nazivni napon	240VAC
Nazivna prekidna moć	100
Specific Energy (kJ/Ω)	156,20
Charge (As)	12,5(L-N)/50(N-PE)
Vrijeme odziva (ns)	<100
Overcurrent Protection (max) (A gG)	nicht notwendig
TOV SafeFail 120min (L-N) (V)	442
TOV Withstand 200ms (N-PE) (V)	1200
Follow Current Interrupt Rating (A)	100


Tehnički podaci - nastavak

Open Circuit Voltage of Combination Wave Generator (1,2/50 μ s) (kV)	6
Short Circuit Current of Combination Wave Generator (8/20 μ s) (kA)	3

Circuit diagram IS010131--

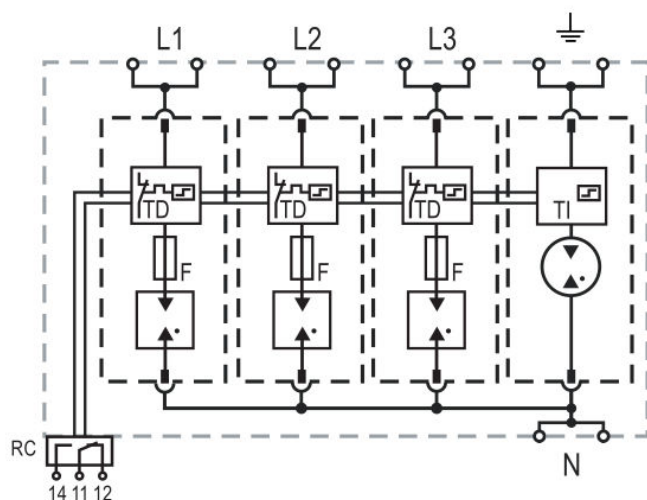

Dimension diagram IS010131-- [mm/inch]

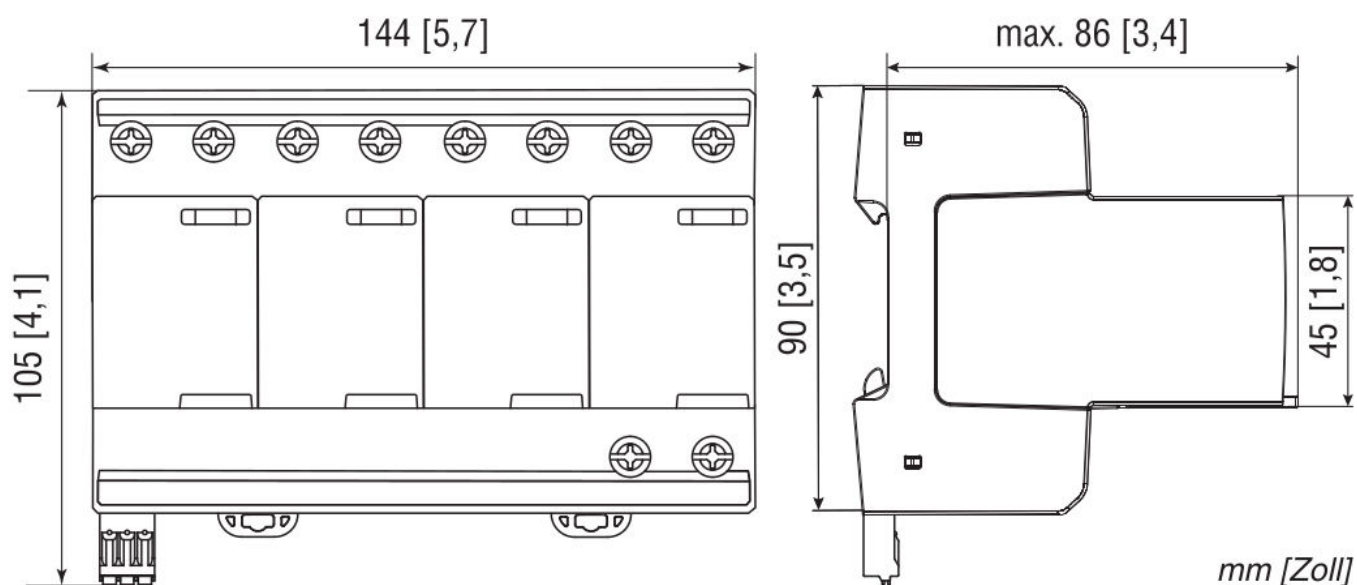

OPIS

KAT. BROJ

Odvodnik 3+1, TNS, T1, 275V limp=25kA/pol, kontakt za sign.
integriran osigurač, utična izvedba

IS010131