

Tehnički list za artikl: IS010140--

Odvodnik 4+0, TNS, T1, 275V Iimp=25kA/ pol, kontakt za sign.

integiran osigurač, utična izvedba




Tehnički podaci

Broj polova	4+0
Trajni napon (VAC)	275(L-PE)/305(N-PE)
Impulsna struja (kA)	25
Nazivna odvodna struja (kA)	25
Maks. struja pražnjenja (kA)	65
Razina zaštite (kV)	1900(L-PE)/1500(N-PE)
Širina (broj modula)	8
Signalni kontakt	Da
Nazivni napon	240VAC
Nazivna prekidna moć	100
Specific Energy (kJ/Ω)	156,20
Charge (As)	12,50
Vrijeme odziva (ns)	<100
Overcurrent Protection (max) (A gG)	nicht notwendig
TOV SafeFail 120min (L-N) (V)	442
TOV Withstand 200ms (N-PE) (V)	1200
Follow Current Interrupt Rating (A)	100


Tehnički podaci - nastavak

Open Circuit Voltage of Combination Wave Generator (1,2/50 μ s) (kV)	6
Short Circuit Current of Combination Wave Generator (8/20 μ s) (kA)	3

Circuit diagram IS010140--

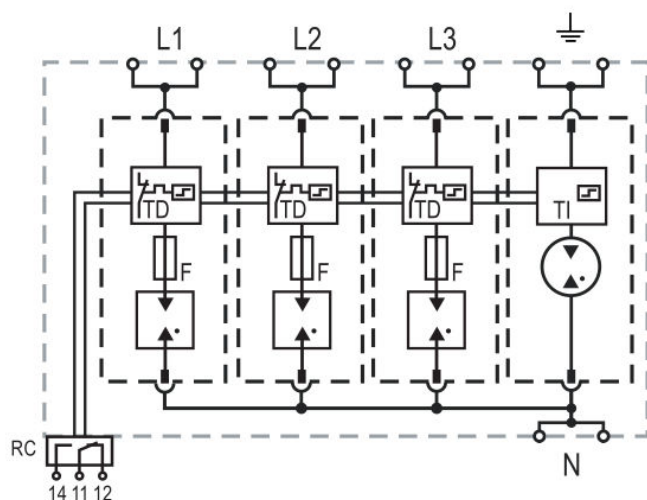

Dimension diagram IS010140-- [mm/inch]

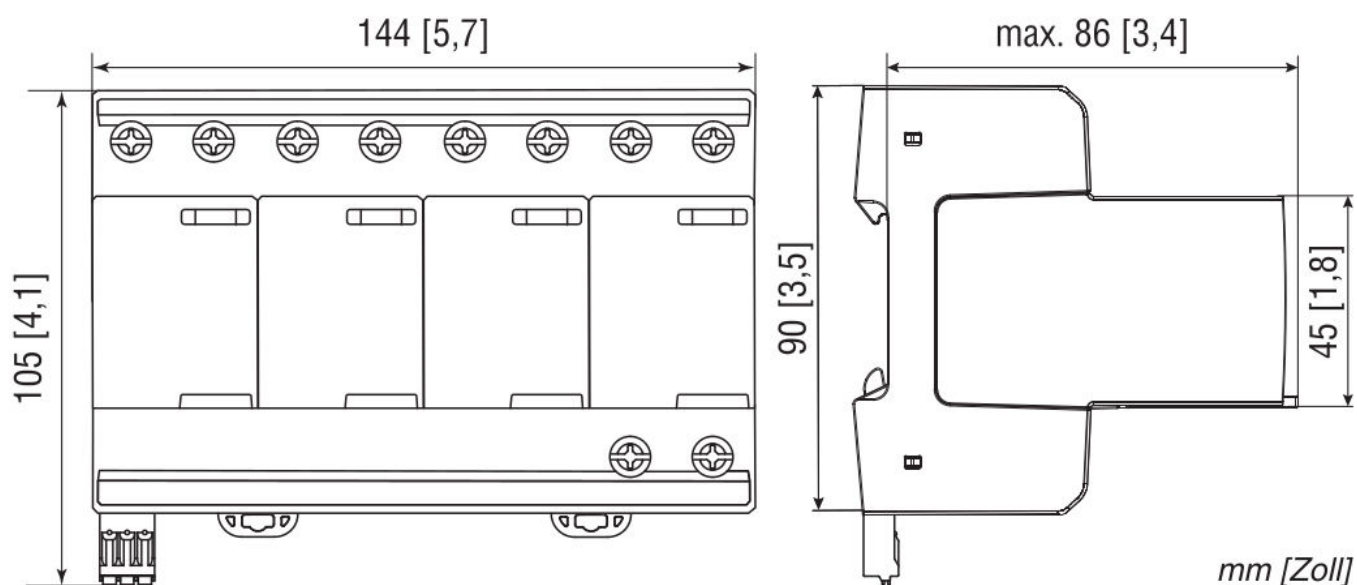

OPIS

KAT. BROJ

Odvodnik 4+0, TNS, T1, 275V Iimp=25kA/pol, kontakt za sign.
integriran osigurač, utična izvedba

IS010140