

Tehnički list za artikl: IU070127-A

# 19" okvir (rack) jednodjelni 27U, 616x1365x600



## SCHRACK-Info

These 19"- systemracks are used when access to the equipment from all sides is necessary all the time.

Also frequently used for presentation of 19"- devices in show-rooms or on exhibitions.

The single section racks are designed for installations without heavy equipment.

The double section racks are designed for installation of heavier and larger equipment.

The in the double section racks included stabilization set increases stability of the whole rack in case of installation of slide-out devices, e.g. servers.

### Installation:

- Direct on floor.
- By use of the included levelling feet in case of uneven floor.
- By use of optional castors with brake (Ordernumber: DSR00005-A).

### MOUNTING OF THE FRAME

- To ensure the maximum recommended load, it is necessary to distribute the load equally. It is necessary to prevent one-side or one -point loading of the frame.
- Place the frame on a flat floor and compensate an eventual small roughness with nivelation feet.

### CERTIFICATE AND CONFORMITY


- This product is fully in accordance with EN 62208 ed 2:2012.

## Tehnički podaci


|                                |            |
|--------------------------------|------------|
| Neto širina (mm)               | 600,00     |
| Neto visina (mm)               | 1.340,00   |
| Neto dubina (mm)               | 600,00     |
| Neto masa (kg)                 | 19,00      |
| Min. temperatura okoline (°C)  | 0          |
| Maks. temperatura okoline (°C) | 40         |
| Visina                         | 27U-1365mm |

## Podatkovna tablica: 19" okvir (rack) jednodjelni 27U, 616x1365x600

|            | A[mm] | B[mm] | D[mm] | E[mm] | Maximallast bei gleichmäßiger Verteilung[kg] | Gewicht Brutto[kg] | Gewicht Netto[kg] |
|------------|-------|-------|-------|-------|----------------------------------------------|--------------------|-------------------|
| IU070127-A | 1340  | -     | 600   |       | 150                                          | 24,2               | 19                |
| IU070141-A | 2005  | -     | 600   |       | 150                                          | 27,7               | 22,4              |
|            |       |       |       |       |                                              |                    |                   |
| IU070227-A | 1340  | 664   | 700   |       | 150                                          | 36,9               | 31,4              |
| IU070242-A | 2005  | 664   | 700   |       | 150                                          | 43,8               | 38,3              |

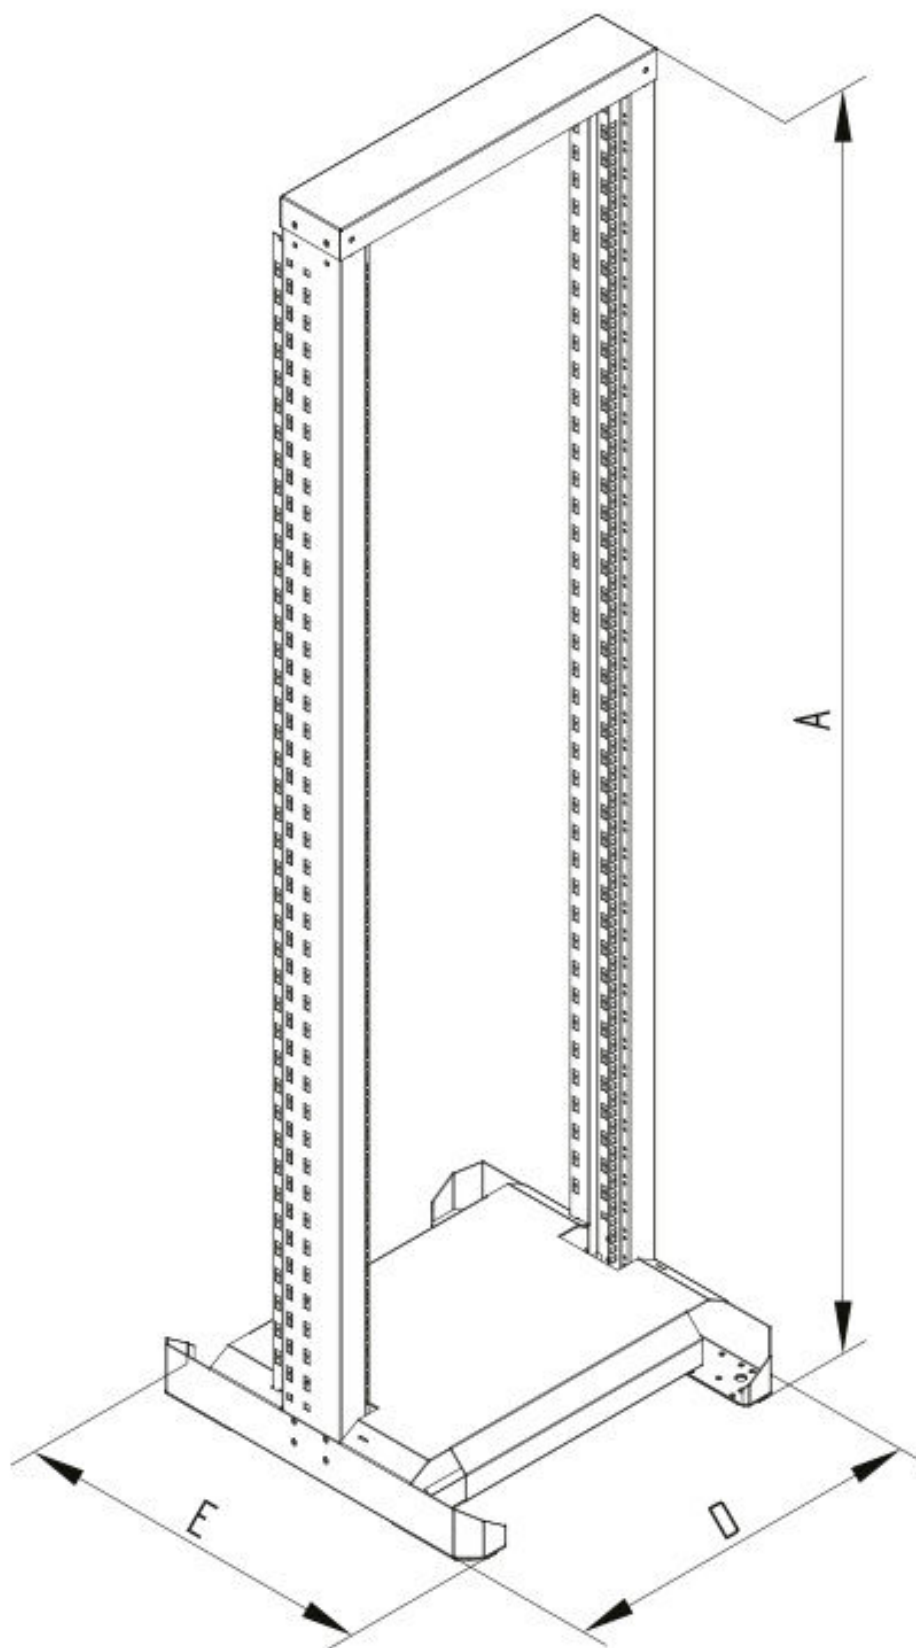**Mjerne skice: 19" okvir (rack) jednostelni 27U, 616x1365x600**

## Mjerne skice: 19" okvir (rack) jednodjelni 27U, 616x1365x600

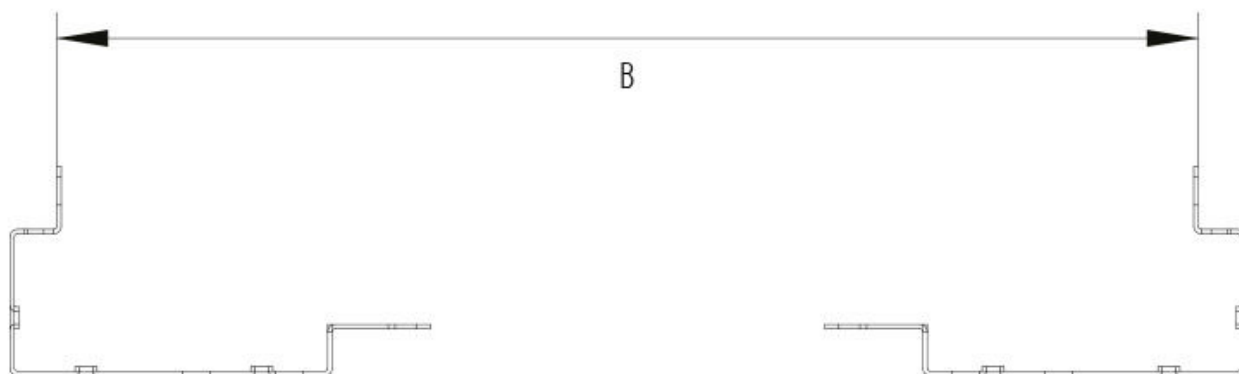

### Tablica artikla

| OPIS                                                                                    | KAT. BROJ  |
|-----------------------------------------------------------------------------------------|------------|
| 19" okvir (rack) jednodjelni 27U, 616x1365x600                                          | IU070127-A |
| <b>Dodatni pribor</b>                                                                   |            |
| 19" vodilica kabela s 5 velikih metalnih prstena 80x40, 1U                              | DBC14805   |
| 19" vodilica kabela s 5 velikih prstena 70x40, 1U, RAL7035                              | DBK14805   |
| 19" fiksna polica do maks. 80kg, d=450mm, 1U, RAL7035                                   | DFS14845-C |
| 19" napojna letva sa 9xshuko, alu 1U, kabel 2m, RAL7035                                 | IU070114   |
| 19" napojna letva sa 7xshuko+prenaponska zaštita, 1.25U<br>kabel s utikačem 2m, RAL7035 | IU070113   |
| 19" napojna letva, 9xshuko+prekidač, kabel 2m, crna, alu, 1U<br>ALU profil              | Q7070114-A |

## Tablica artikla

| OPIS                                                                                                                     | KAT. BROJ  |
|--------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Dodatni pribor</b>                                                                                                    |            |
| 19" Napojna letva, 7xšuko+prekidač, prenap.zaštita, crna<br>1U, kabel 2m, alu profil, crna                               | Q7070113-A |
| 19" set-vijci M6, kavezne matice i podložne pločice(50 kom.)                                                             | DSSRA050   |
| 19" montažna ploča, 14U, čelična, perforirana                                                                            | DMP1914    |
| LED rasvjeta za ormare, magnet, 230VAC, s kontaktom za vrata<br>automatski u radu čim se otvore vrata, vanjsko napajanje | DTLIGHT01  |
| Preklopnik 24xRJ45 10/100/1000T, bez vent., unut. napajanje<br>Metalno kućište, 19"                                      | QLGSW2457  |