

Tehnički list za artikl: IUKTI6801 -

Rashladna jed. 4000W, djelomično ugradna montaža, serija DTI

400V, Dubina ugradnje=120mm, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for partially recessed mounting (=DTI)
- For door or side mounting
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

Green Series Cooling Unit:

- Highest energy efficiency for significant energy savings and operating cost reduction
- Significantly less refrigerant used
- UL listed according to UL 60335 for long-term planning even after 2024
- Large distance between intake and exhaust vents, safe circulation within the electrical enclosure due to long passage of air, therefore hot spots are eliminated
- Exceptional serviceability

IUKTI6801:

- Cooling performance: 4000W
- Rated voltage: 400V
- Type of connection: Spring-type terminal included with plug

- Installation depth: 120mm
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP24: Towards the surroundings




Tehnički podaci

Neto širina (mm)	485,00
Neto visina (mm)	1.537,00
Neto dubina (mm)	372,00
Neto masa (kg)	90,00
Min. temperatura okoline (°C)	10
Maks. temperatura okoline (°C)	55
IP stupanj zaštite	IP55
Klasa zaštite	I
Nazivni napon	400V-AC
Tip	Klima uređaj
Rashladni učinak (W)	4000


Podatkovna tablica: Rashladna jed. 4000W, djelomično ugradna montaža, serija DTI

Daten		Einheit	IUKTI6801
Nennspannung +10%		Hz V	AC 50 / 60 400 / 460 3~
Kälteleistung nach EN 14511	L35/L35: L35/L50:	W	4000 3150
Leistungsaufnahme	L35/L35:	W	1800 / 2416
Einschaltstrom	L35/L35:		16
Kälteleistungszahl	ϵ_{ke}		2,20
Luftvolumenstrom freiblasend	intern	m ³ /h	1490
	extern	m ³ /h	1490
Absicherung T		A	8
Anschlussart			Federzugklemme an beigefügtem Stecker
Umgebungstemperatur		°C (°F)	+10 bis +55 (+50 bis +131)
Regelbereich (einstellbar)		°C (°F)	+25 bis +45 (+77 bis +113)
Kältemittel	R134a	g	1200
Kondensatabscheidung			integrierte Kondensatverdunstung mit Sicherheitsüberlauf
Schutzart nach EN 60529	IP55		gegenüber dem Schaltschrank, bei bestimmungsgemäßem Einsatz
	IP24		gegenüber der Umgebung, bei bestimmungsgemäßem Einsatz
Bauweise	Gehäuse		Stahlblech verzinkt
	Haube		elektrostatisch pulverbeschichtet (200 °C)
Abmessungen		[mm]	H=1540, B=485, T=278
Nettogewicht		[kg]	90
Farbe			RAL 7035 (Lichtgrau)

Cooling Capacity Performance Curves

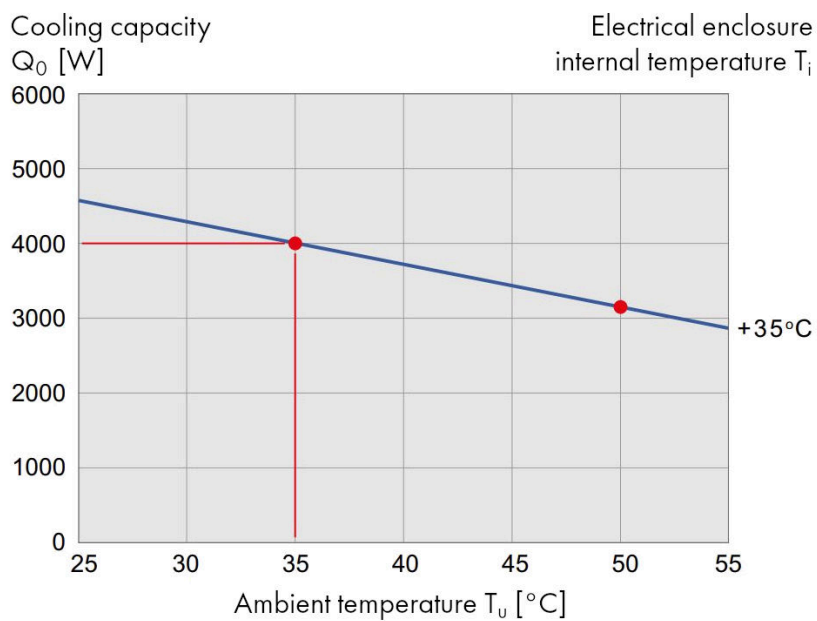

Dimensions and Cutout IUKTI6801

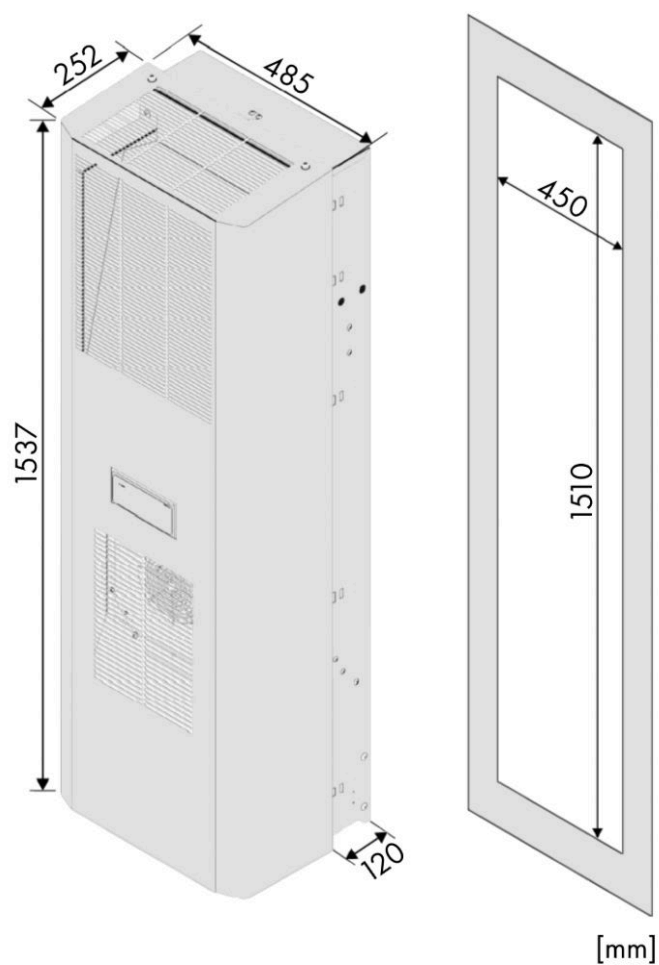

OPIS

KAT. BROJ

Rashladna jed. 4000W, djelomično ugradna montaža, serija DTI
400V, Dubina ugradnje=120mm, IP55, RAL 7035

IUKTI6801