

Tehnički list za artikl: IUKTI9021-

Rashladna jed. 320W, djelomično ugradna montaža, serija DTI

230V, Dubina ugradnje=67mm, IP54, RAL 7035



SCHRACK-Info

General:

- Cooling unit for partially recessed mounting (=DTI)
- Simple and fast mounting with brackets for door or side mounting
- Small mounting area, suitable for small electrical enclosures and larger electrical enclosures for the cooling of hot spots
- Compact design, perfect for flat enclosures, control consoles and operating units
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTI9021:

- Cooling performance: 320W
- Rated voltage: 230V
- Diagnostic message via operating display
- Integrated fault and door contact
- Type of connection: Spring-type terminal included with plug
- Installation depth: 74mm
- Degree of protection IP54: Towards the enclosure
- Degree of protection IP34: Towards the surroundings




Tehnički podaci

Neto širina (mm)	385,00
Neto visina (mm)	329,00
Neto dubina (mm)	252,00
Neto masa (kg)	17,00
Min. temperatura okoline (°C)	15
Maks. temperatura okoline (°C)	45
IP stupanj zaštite	IP54
Klasa zaštite	I
Nazivni napon	230V-AC
Tip	Klima uređaj
Rashladni učinak (W)	320


Technical Data for Cooling Unit 320W, DTI Series, IUKTI9021:

Daten	Einheit	IUKTI9021
Nennspannung +10%	Hz V	AC 50 / 60 230
Kälteleistung nach EN 14511	L35/L35: L35/L45: W	320 / 340 300 / 330
Leistungsaufnahme	L35/L35: W	230 / 240
Stromaufnahme	L35/L35: A	1,6
Einschaltstrom	L35/L35:	11,7 / 10,9
Luftvolumenstrom freiblasend	intern extern m³/h m³/h	282 282
Absicherung T	A	4
Anschlussart		Federzugklemme an beigefügtem Stecker
Geräuschpegel nach EN ISO 3741	dB (A)	< 62
Umgebungstemperatur	°C (°F)	+15 bis +45 (+59 bis +113)
Regelbereich (einstellbar)	°C (°F)	+25 bis +45 (+77 bis +113); werkseitige Einstellung +35 (+95)
Kältemittel R134a	g	350
Einschaltdauer	%	100
Kondensatabscheidung		Kondensatablauf; integrierte Kondensatverdunstung optional
Schutzart nach EN 60529	IP54 IP 34	gegenüber dem Schaltschrank, bei bestimmungsgemäßem Einsatz gegenüber der Umgebung, bei bestimmungsgemäßem Einsatz
Bauweise	Gehäuse Haube	Stahlblech verzinkt verzinkt, elektrostatisch pulverbeschichtet (200 °C)
Abmessungen	[mm]	H=329, B=385, T=245
Nettogewicht	[kg]	17
Farbe		RAL 7035 (Lichtgrau)

Cooling Capacity Performance Curves

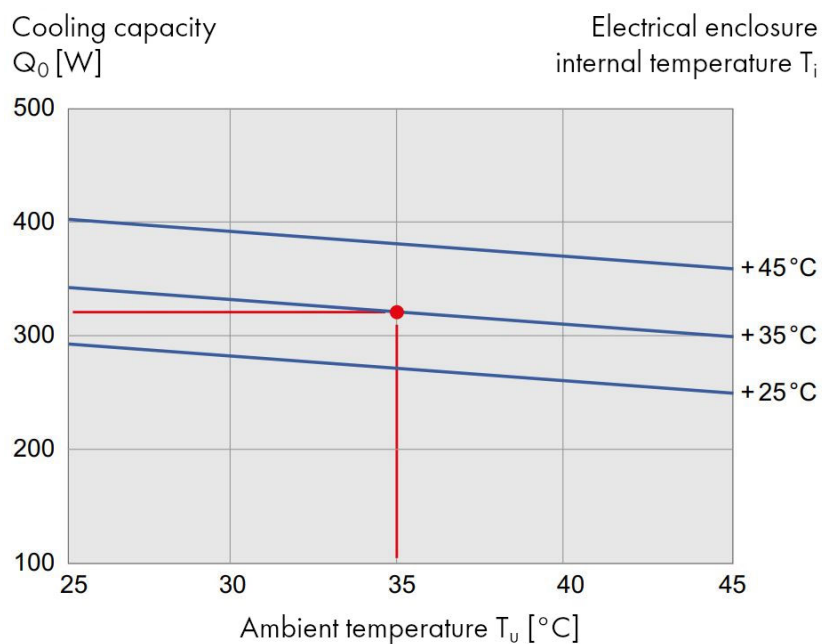

Dimensions and Cutout IUKTI9021

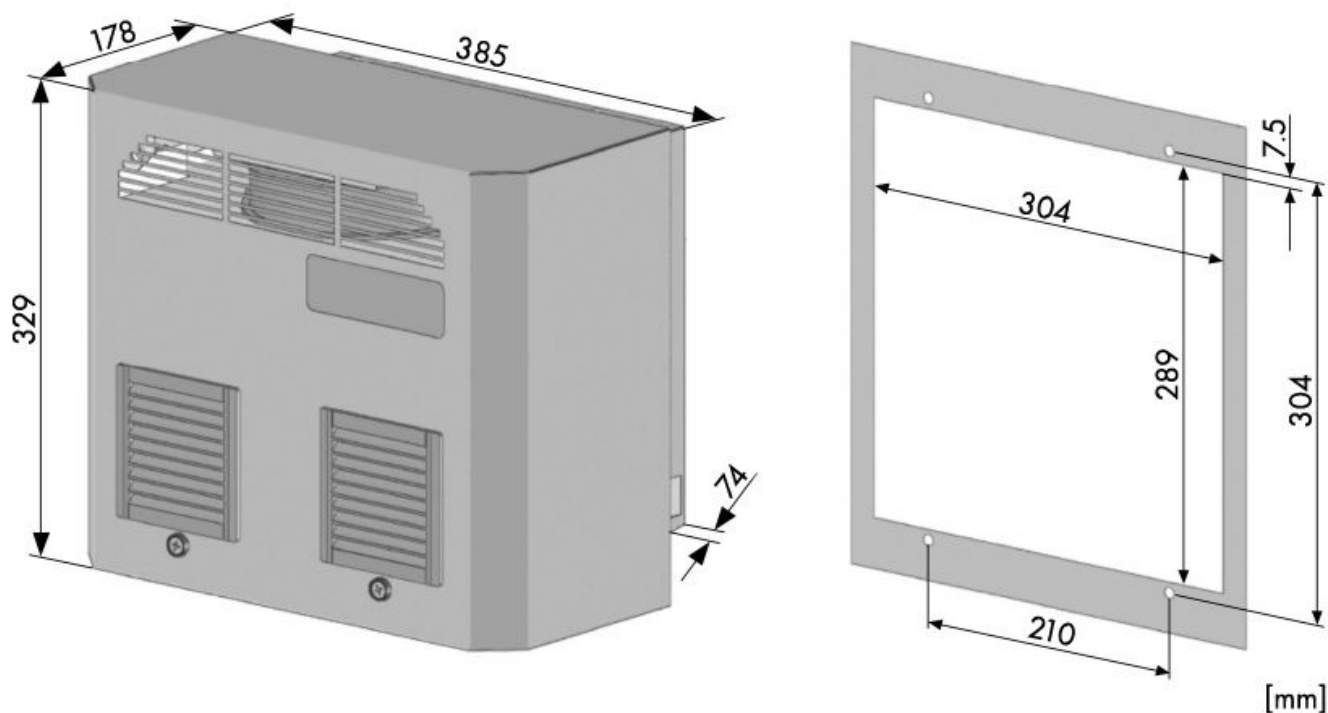

OPIS

KAT. BROJ

Rashladna jed. 320W, djelomično ugradna montaža, serija DTI
230V, Dubina ugradnje=67mm, IP54, RAL 7035

IUKTI9021