

Tehnički list za artikl: IUKTS9011-

Rashladna jed. 320W, vanjska montaža sa strane, serija DTS

230V, IP54, RAL 7035



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Simple and fast mounting with brackets
- Small mounting area, suitable for small electrical enclosures and larger electrical enclosures for the cooling of hot spots
- Compact design, perfect for flat enclosures, control consoles and operating units
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTS9011:

- Cooling performance: 300W
- Rated voltage: 230V
- Powerful radial fans ensure optimum air circulation inside the enclosure
- Integrated collective fault and door contact (potential-free)
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP54: Towards the enclosure
- Degree of protection IP34: Towards the surroundings




Tehnički podaci

Neto širina (mm)	495,00
Neto visina (mm)	300,00
Neto dubina (mm)	140,00
Neto masa (kg)	15,00
Min. temperatura okoline (°C)	15
Maks. temperatura okoline (°C)	45
IP stupanj zaštite	IP54
Klasa zaštite	I
Nazivni napon	230V-AC
Tip	Klima uređaj
Rashladni učinak (W)	300


Podatkovna tablica: Rashladna jed. 320W, vanjska montaža sa strane, serija DTS

Daten	Einheit	IUKTS9011
Nennspannung +10%	Hz V	AC 50 / 60 230
Kälteleistung nach EN 14511	L35/L35: L35/L45: W	300 180
Leistungsaufnahme	L35/L35: W	275 / 290
Stromaufnahme	L35/L35: A	1,52 / 1,56
Einschaltstrom	L35/L35: A	4,52 / 4,66
Luftvolumenstrom	intern m³/h	160
freiblasend	extern m³/h	160
Absicherung T	A	16
Anschlussart		Federzugklemme an beigefügtem Stecker
Geräuschpegel nach EN ISO 3741	dB (A)	< 65
Umgebungstemperatur	°C (°F)	+15 bis +45 (+59 bis +113)
Regelbereich (einstellbar)	°C (°F)	+25 bis +45 (+77 bis +113); werkseitige Einstellung +35 (+95)
Kältemittel	R134a g	130
Einschaltdauer	%	100
Kondensatabscheidung		Kondensatablauf
Schutzart	IP54	gegenüber dem Schaltschrank, bei bestimmungsgemäßem Einsatz
nach EN 60529	IP34	gegenüber der Umgebung, bei bestimmungsgemäßem Einsatz
Bauweise	Gehäuse	Stahlblech verzinkt
	Haube	verzinkt, elektrostatisch pulverbeschichtet (200 °C)
Abmessungen	[mm]	H=300, B=495, T=140
Nettogewicht	[kg]	17

Cooling Capacity Performance Curves

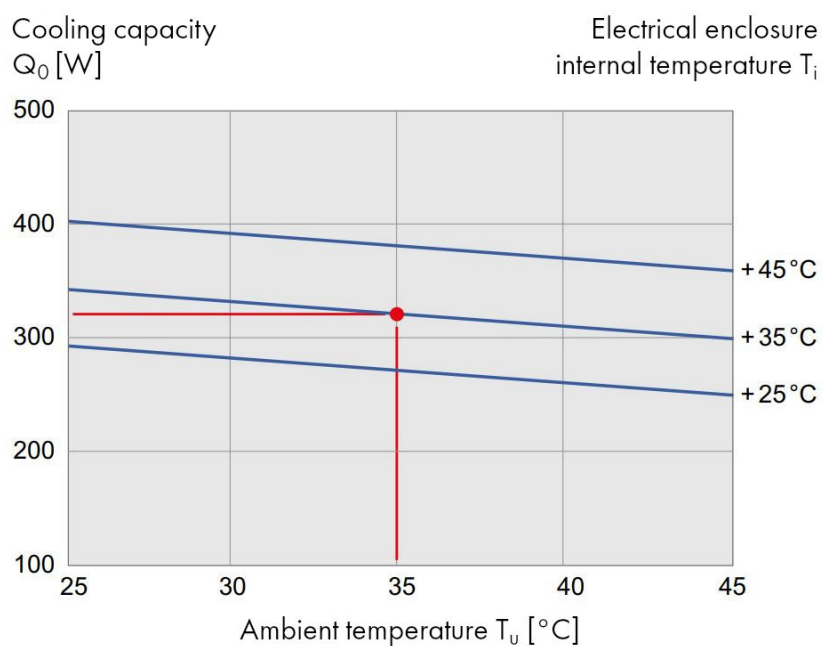

Dimensions and Cutout IUKTS9011

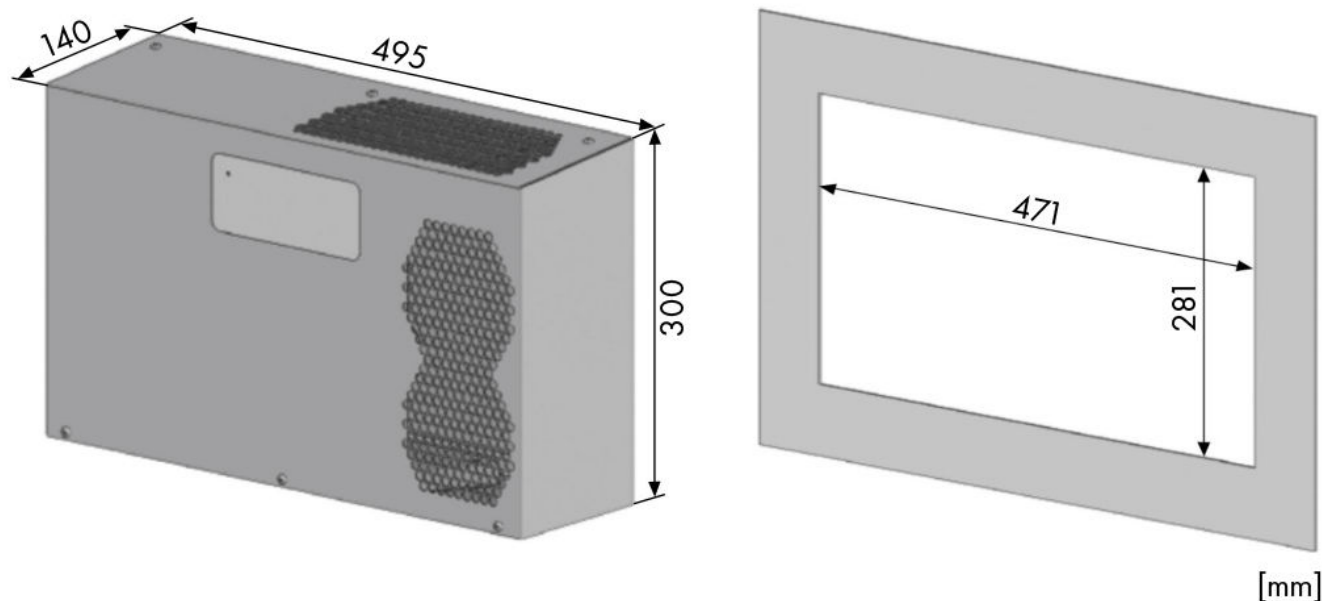

OPIS

KAT. BROJ

Rashladna jed. 320W, vanjska montaža sa strane, serija DTS
230V, IP54, RAL 7035

IUKTS9011