

Tehnički list za artikl: KCOX206060

Ormar za vanjsku upo. jednokrilni IP55 2000x600x600 (VxŠxD)

RAL7035, nehrđajući čelik, s izlaznim filterom, s poklopcem za zaštitu od mlaza vode i s montažnom pločom



SCHRACK-Info

- **Material :**
 - Frame: 1,5 mm stainless steel
 - Doors: 2 mm stainless steel
 - Rear panel: 1.5 mm stainless steel
 - Roof panel: 1.5 mm stainless steel
- **Mounting plate :** 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with depth adjustment brackets ACMPD002. As insertion aid of the mounting plate we recommend the use of slide-in rails ACCLT600 (for depth 600 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure
- **Bottom plates :** 1 mm galvanised sheet steel, divided in two parts
- **Frame :** Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including inside circumferential hole pattern
- **Door :** On single door enclosures, the door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock

- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating with UV protection
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, closed roof panel, bottom plates and mounting plate. Delivered on a pallet.

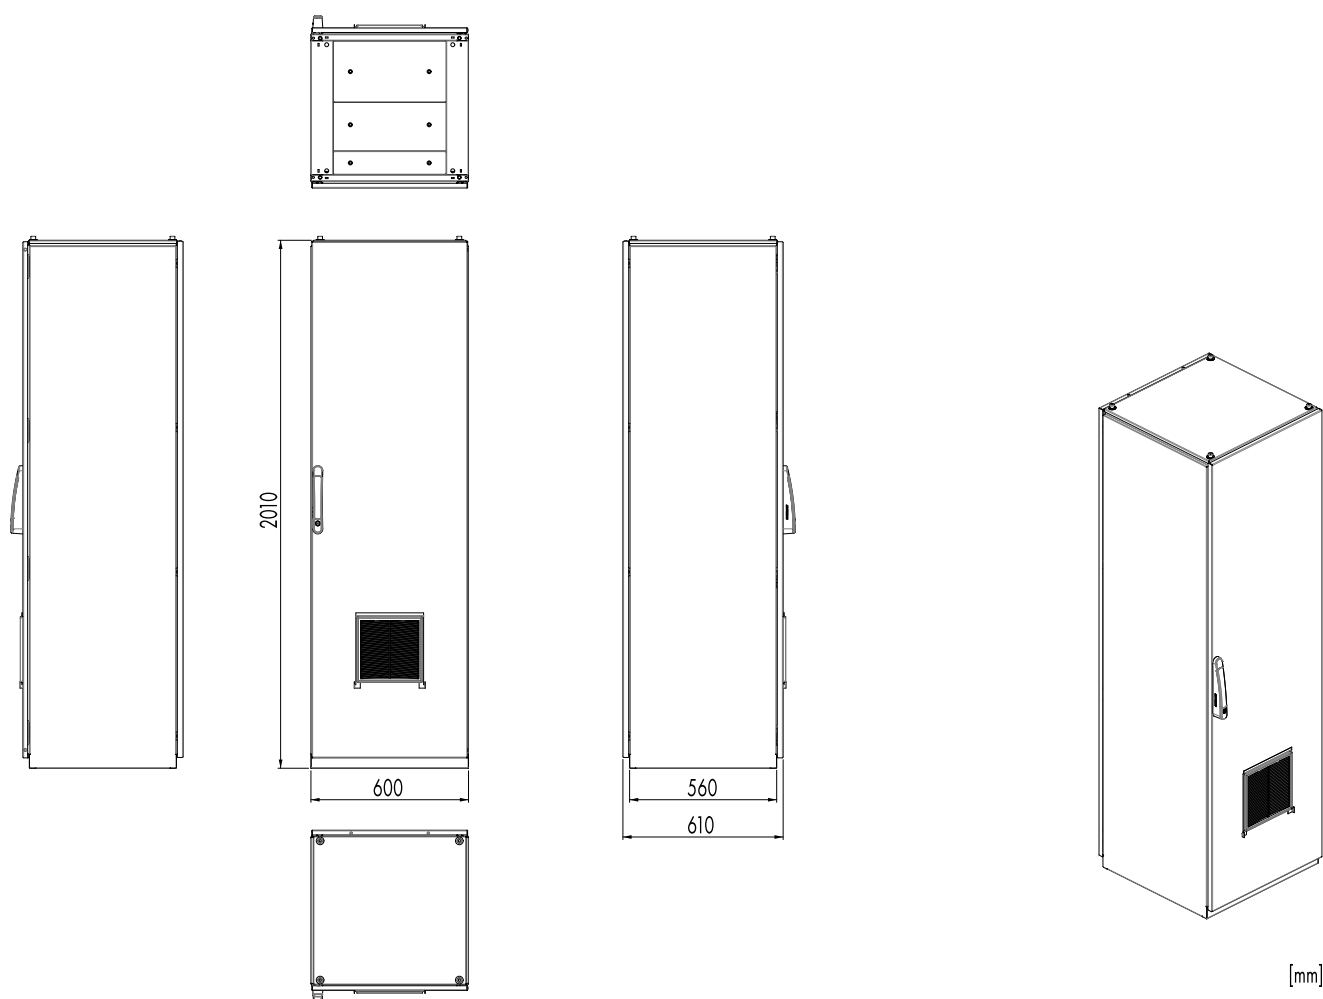


Tehnički podaci

Neto širina (mm)	600,00
Neto visina (mm)	2.000,00
Neto dubina (mm)	600,00
Neto masa (kg)	167,00
Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	80
IP stupanj zaštite	IP55
Klasa zaštite	I
Materijal	Nehrđajući čelik 1.4016 (AISI 430)
Boja	RAL 7035 (svijetlo siva)
Širina (mm)	600
Visina (mm)	2000
Dubina (mm)	600
Debljina stijenke tijela (mm)	1
Montažna ploča	Pocinčani čelični lim 3mm
Debljina montažne ploče (mm)	3
Širina montažne ploče (mm)	497
Visina montažne ploče (mm)	1891
Debljina stijenke vrata (mm)	2
Broj dijelova donje ploče	2
Opteretivost vrata (kg)	100
Broj vrata	1
Širina podne ploče (mm)	457
Roof panel thickness (mm)	1,50
Rear panel thickness (mm)	1,50
Corrosion class	C3-M
Tip	Kompaktni samostojeći ormar

Tehnički podaci - nastavak

Opterećivost montažne ploče (kg)	700
Disipacija snage (W)	-684,00

Mjerne skice: Ormar za vanjsku upo. jednokrilni IP55 2000x600x600 (VxŠxD)

Tablica artikla

OPIS	KAT. BROJ
Ormar za vanjsku upo. jednokrilni IP55 2000x600x600 (VxŠxD)	KCOX206060
RAL7035, nehrđajući čelik, s izlaznim filterom, s poklopcem za zaštitu od mlaza vode i s montažnom pločom	
Dodatni pribor	
INOX podnožje prema širini ormara 600x100mm (ŠxV)	KCSOBX0601
Isporuka sadrži prednji i stražnji element podnožja (par, prema širini ormara), RAL7046 (Tele siva 2)	
INOX podnožje prema dubini ormara 600x100mm (ŠxV)	KCSOTX0601
Isporuka sadrži lijevi i desni element (par, prema dubini ormara) te 4 (predmontirana) kutna elementa, RAL7046 (Tele siva 2)	
Krović s ventilatorom (s filterom) 540m3/h, 600x600mm (ŠxV)	KCRC6060F
Izrađen od aluminija, RAL7035, montaža na INOX ormar KCIX206060 i outdoor ormar KCOX206060	
Krović s izlaznim filterom, 600x600mm (ŠxV)	KCRC6060E
Izrađen od aluminija, RAL7035, montaža na INOX ormar KCIX206060 i outdoor ormar KCOX206060	
Klizna šina za ugradnju mont. pl. u AC/KC ormar dubine 600mm	ACCLT600
Praktičan pribor za umetanje montažne ploče u ormar. Nakon umetanja i fiksiranja montažne ploče šine se uklanjaju te se u istu svrhu mogu koristiti kod sljedećeg ormara. Materijal: čelični lim debljine 2mm. Pakiranje: 1 par.	
Transportne ušice M12 za AC,KC, AT, KT ormare, 4 komada	ACLE9301
za podizanje kompaktnog samostojećeg ili jednog serijskog ormara	
Zakretna ručica bez umetka, crna, feder opruga	ACLSC502
without insert	
Adapter za polucilindar bravu	ASLS2100
za zakretnu ručicu, za ormare AC/KC	
Adapter za umetak brave sa tipkom za ormare AC/KC	ASLSS1537
Kavezne matice M6 (pakiranje 10 komada)	ACCNM615
Vijak za maticu M6x16 prema ISO 7380 (pak.=10 kom.)	ACCNK006
PU=10 pieces	
Kavezne matice M8 (pakiranje 10 komada)	ACCNM815
Vijak za maticu M8x16 prema ISO 7380	ACCNK008
PAK=10 komada	
Ključ za 5mm "double-bit" bravu	DV903532
1 komad u isporuci	