

Tehnički list za artikl: KCOX208060

# Ormar za vanjsku upo. jednokrilni IP55 2000x800x600 (VxŠxD)

RAL7035, nehrđajući čelik, s izlaznim filterom, s poklopcem za zaštitu od mlaza vode i s montažnom pločom



## SCHRACK-Info

- **Material :**

- Frame: 1,5 mm stainless steel
- Doors: 2 mm stainless steel
- Rear panel: 1.5 mm stainless steel
- Roof panel: 1.5 mm stainless steel

- **Mounting plate :** 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with depth adjustment brackets ACMPD002. As insertion aid of the mounting plate we recommend the use of slide-in

rails ACCLT600 (for depth 600 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure

- **Bottom plates** : 1 mm galvanised sheet steel, divided in two parts
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including inside circumferential hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating with UV protection
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, closed roof panel, bottom plates and mounting plate. Delivered on a pallet.




## Tehnički podaci

|                                |                                    |
|--------------------------------|------------------------------------|
| Neto širina (mm)               | 800,00                             |
| Neto visina (mm)               | 2.000,00                           |
| Neto dubina (mm)               | 600,00                             |
| Neto masa (kg)                 | 203,00                             |
| Min. temperatura okoline (°C)  | -40                                |
| Maks. temperatura okoline (°C) | 80                                 |
| IP stupanj zaštite             | IP55                               |
| Klasa zaštite                  | I                                  |
| Materijal                      | Nehrđajući čelik 1.4016 (AISI 430) |
| Boja                           | RAL 7035 (svijetlo siva)           |
| Širina (mm)                    | 800                                |
| Visina (mm)                    | 2000                               |
| Dubina (mm)                    | 600                                |
| Debljina stijenke tijela (mm)  | 1                                  |
| Montažna ploča                 | Pocinčani čelični lim 3mm          |
| Debljina montažne ploče (mm)   | 3                                  |
| Širina montažne ploče (mm)     | 697                                |
| Visina montažne ploče (mm)     | 1891                               |
| Debljina stijenke vrata (mm)   | 2                                  |

## Tehnički podaci - nastavak

|                                  |                             |
|----------------------------------|-----------------------------|
| Broj dijelova donje ploče        | 2                           |
| Opteretivost vrata (kg)          | 100                         |
| Broj vrata                       | 1                           |
| Širina podne ploče (mm)          | 657                         |
| Roof panel thickness (mm)        | 1,50                        |
| Rear panel thickness (mm)        | 1,50                        |
| Corrosion class                  | C3-M                        |
| Tip                              | Kompaktni samostojeći ormar |
| Opteretivost montažne ploče (kg) | 700                         |
| Disipacija snage (W)             | -799,00                     |

## Dimensioned Drawing

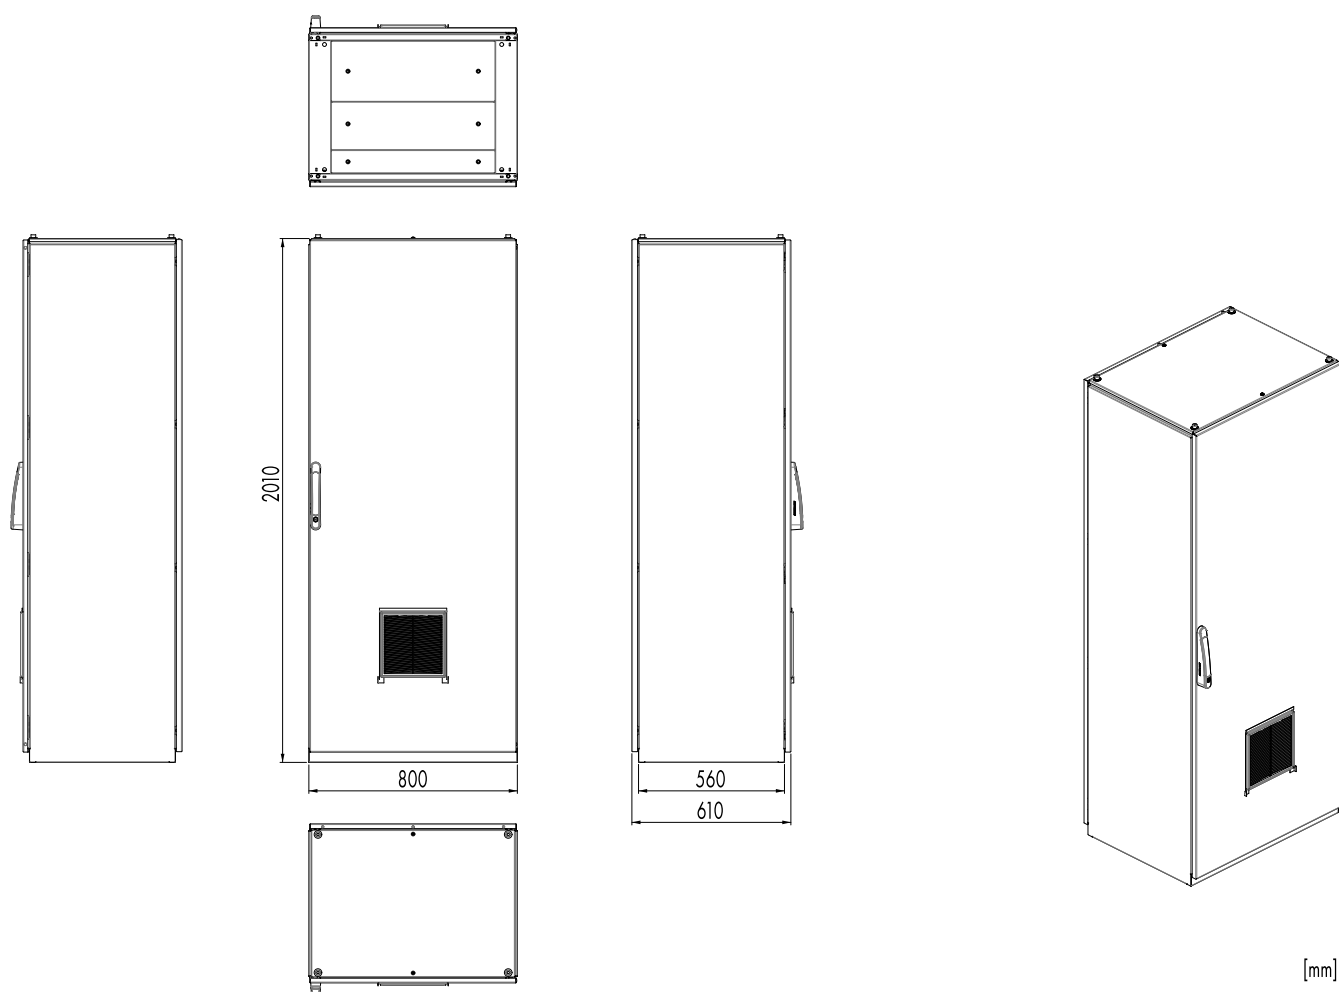

## Tablica artikla

| OPIS                                                                                                                                                                                                                             | KAT. BROJ  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Ormar za vanjsku upo. jednokrilni IP55 2000x800x600 (VxŠxD)                                                                                                                                                                      | KCOX208060 |
| RAL7035, nehrđajući čelik, s izlaznim filterom, s poklopcem za zaštitu od mlaza vode i s montažnom pločom                                                                                                                        |            |
| <b>Dodatni pribor</b>                                                                                                                                                                                                            |            |
| INOX podnožje prema širini ormara 800x100mm (ŠxV)                                                                                                                                                                                | KCSOBX0801 |
| Isporuka sadrži prednji i stražnji element podnožja (par, prema širini ormara), RAL7046 (Tele siva 2)                                                                                                                            |            |
| INOX podnožje prema dubini ormara 600x100mm (ŠxV)                                                                                                                                                                                | KCSOTX0601 |
| Isporuka sadrži lijevi i desni element (par, prema dubini ormara) te 4 (predmontirana) kutna elementa, RAL7046 (Tele siva 2)                                                                                                     |            |
| Krović s ventilatorom (s filterom) 540m <sup>3</sup> /h, 800x600mm (ŠxV)                                                                                                                                                         | KCRC8060F  |
| Izrađen od aluminija, RAL7035, montaža na INOX ormar KCIX208060 i outdoor ormar KCOX208060                                                                                                                                       |            |
| Krović s izlaznim filterom, 800x600mm (ŠxV)                                                                                                                                                                                      | KCRC8060E  |
| Izrađen od aluminija, RAL7035, montaža na INOX ormar KCIX208060 i outdoor ormar KCOX208060                                                                                                                                       |            |
| Klizna šina za ugradnju mont. pl. u AC/KC ormar dubine 600mm                                                                                                                                                                     | ACCLT600   |
| Praktičan pribor za umetanje montažne ploče u ormar. Nakon umetanja i fiksiranja montažne ploče šine se uklanjaju te se u istu svrhu mogu koristiti kod sljedećeg ormara. Materijal: čelični lim debljine 2mm. Pakiranje: 1 par. |            |
| Transportne ušice M12 za AC, KC, AT, KT ormare, 4 komada                                                                                                                                                                         | ACLE9301   |
| za podizanje kompaktnog samostojećeg ili jednog serijskog ormara                                                                                                                                                                 |            |
| Zakretna ručica bez umetka, crna, feder opruga                                                                                                                                                                                   | ACISC502   |
| without insert                                                                                                                                                                                                                   |            |
| Adapter za polucilindar bravu                                                                                                                                                                                                    | ASLS2100   |
| za zakretnu ručicu, za ormare AC/KC                                                                                                                                                                                              |            |
| Adapter za umetak brave sa tipkom za ormare AC/KC                                                                                                                                                                                | ASLSS1537  |
| Kavezne matice M6 (pakiranje 10 komada)                                                                                                                                                                                          | ACCNM615   |
| Vijak za maticu M6x16 prema ISO 7380 (pak.=10 kom.)                                                                                                                                                                              | ACCNK006   |
| PU=10 pieces                                                                                                                                                                                                                     |            |
| Kavezne matice M8 (pakiranje 10 komada)                                                                                                                                                                                          | ACCNM815   |
| Vijak za maticu M8x16 prema ISO 7380                                                                                                                                                                                             | ACCNK008   |
| PAK=10 komada                                                                                                                                                                                                                    |            |
| Ključ za 5mm "double-bit" bravu                                                                                                                                                                                                  | DV903532   |
| 1 komad u isporuci                                                                                                                                                                                                               |            |