

Tehnički list za artikl: LI10003968

# LED svjetiljka Dori 0.9 12W/ 18W 2160lm/ 3240lm 3000K/4000K AC



## Info o proizvodu

The Dori LED is perfect for converting conventional T5 and T8 fluorescent tubes to LED. A simple plug-in solution that retains the existing luminaire housing. The Dori LED bar is simply inserted and wired into the existing luminaire using magnets. The luminaires are not dimmable. The different lengths available mean that the various T5 and T8 versions can be replaced. All in all, an environmentally friendly and clean solution.


## Tehnički podaci

|                                |                           |
|--------------------------------|---------------------------|
| Neto duljina (mm)              | 829,00                    |
| Neto promjer (mm)              | 35,00                     |
| Neto masa (kg)                 | 0,11                      |
| Min. temperatura okoline (°C)  | -20                       |
| Maks. temperatura okoline (°C) | 40                        |
| Način montaže                  | Nadgradna                 |
| Radna temperatura (°C)         | -20 do +40                |
| Boja                           | bijela                    |
| Materijal                      | Plastično kućište<br>Opal |
| Pokrov                         | Plastic opal              |

## Tehnički podaci - nastavak

|                                  |                                  |
|----------------------------------|----------------------------------|
| Kut svjetlosti (°)               | 120                              |
| Pogonski uređaj                  | LED driver AC                    |
| Radni napon AC (V)               | 220-240                          |
| Efikasnost sustava (lm/W)        | 180                              |
| Snaga (W)                        | 12<br>18                         |
| Boja svjetla                     | Neutralno bijela<br>Toplo bijela |
| Temperatura boje (K)             | 4000<br>3000                     |
| Faktor uzvrata boje              | >80                              |
| Stabilnot boje MacAdam (sdcm)    | <3                               |
| Svjetlosni tok (lm)              | 12W=2160lm / 18W=3240lm          |
| Životni vijek                    | 100.000h (L80/B10)               |
| Dimabilno                        | Ne                               |
| Klasa zaštite                    | II<br>2                          |
| IP stupanj zaštite               | IP20                             |
| KEU                              | C                                |
| Otpornost na udarce              | IK06                             |
| Broj svjetiljki po osiguraču B16 | 28                               |
| Broj svjetiljki po osiguraču C16 | 58                               |

## Mjerne skice: LED svjetiljka Dori 0.9 12W/18W 2160lm/3240lm 3000K/4000K AC

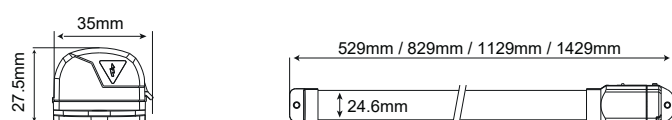

| OPIS                                                         | KAT. BROJ  |
|--------------------------------------------------------------|------------|
| LED svjetiljka Dori 0.9 12W/18W 2160lm/3240lm 3000K/4000K AC | LI10003968 |
| -                                                            |            |