

Tehnički list za artikl: LI115221--

COB LED MODULE, mat bijele b., 12°, CRI90+, 3200K

for AIXLIGHT PRO installation frame



Tehnički podaci


Svjetlosni tok (lm)	1650
Temperatura boje (K)	3200
Faktor uzvrata boje	≥90
Životni vijek	30.000h
Klasa zaštite	III
Izvor svj. uklj.	Da
Operation current mA (mA)	700
Način montaže	Stropna ugradna
Boja	bijela crna
Materijal	Aluminij Staklo
Visina (mm)	130
Promjer (mm)	135
Masa (kg)	0,512
Dodatni pribor	LI1001267-, LI115170--, LI115600--, LI464032--, LI464168--, LI464174--, LI464803--

Tehnički podaci - nastavak

ØxV mm

135x130

Mjerne skice: COB LED MODULE, mat bijele b., 12°, CRI90+, 3200K

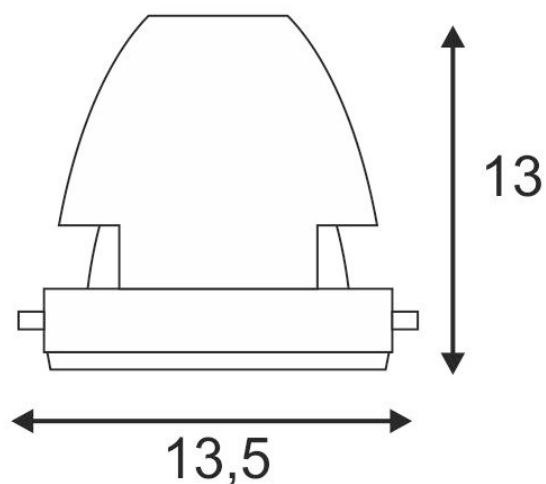

Tablica artikla

OPIS	KAT. BROJ
COB LED MODULE, mat bijele b., 12°, CRI90+, 3200K for AIXLIGHT PRO installation frame	LI115221
Dodatni pribor	
LED Driver 36W, 700mA, dimabilni	LI1001267
Strukturirano staklo za AIXLIGHT PRO ugradno kućište	LI115170
AIXLIGHT PRO ring, mat- bb, aluminij	LI115600
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dim. inkl. Cable relief	LI464032
LED-Driver, 40W, 700mA	LI464168
LED-Driver, 40W, 700mA, dim.	LI464174
LED Driver 36W, 700mA, dim.	LI464803