

Tehnički list za artikl: LI115231--

COB LED MODULE, srebrno-sive b., 12°, CRI90+, 4200K

for AIXLIGHT PRO installation frame




Tehnički podaci

Neto visina (mm)	130,00
Neto promjer (mm)	135,00
Neto masa (kg)	0,51
Način montaže	Stropna ugradna
Boja	srebrno-siva crna
Materijal	Aluminij Staklo
Proizvođač	03-SLV
Operation current mA (mA)	700
Temperatura boje (K)	4200
Faktor uzvrata boje	90
Svjetlosni tok (lm)	1950
Životni vijek	30.000h
Klasa zaštite	III
Energetska klasa	A++ A+ A
Izvor svj. uklj.	Da

Tehnički podaci - nastavak

Promjer (mm)	135
ØxV mm	135x130

Mjerne skice: COB LED MODULE, srebrno-sive b., 12°, CRI90+, 4200K

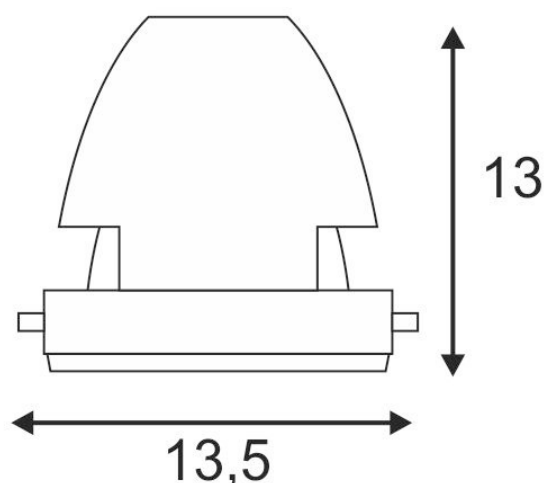

Tablica artikla

OPIS	KAT. BROJ
COB LED MODULE, srebrno-sive b., 12°, CRI90+, 4200K for AIXLIGHT PRO installation frame	LI115231
Dodatni pribor	
LED Driver 36W, 700mA, dimabilni	LI1001267
Strukturirano staklo za AIXLIGHT PRO ugradno kućište	LI115170
AIXLIGHT PRO ring, mat- bb, aluminij	LI115600
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dim. inkl. Cable relief	LI464032
LED-Driver, 40W, 700mA	LI464168
LED-Driver, 40W, 700mA, dim.	LI464174
LED Driver 36W, 700mA, dim.	LI464803