


Tehnički list za artikl: LI158744--

I-VIDUAL, 4000K, srebrno-sive b., L/W

59.5 / 59.5 cm

LED panel for grid ceilings

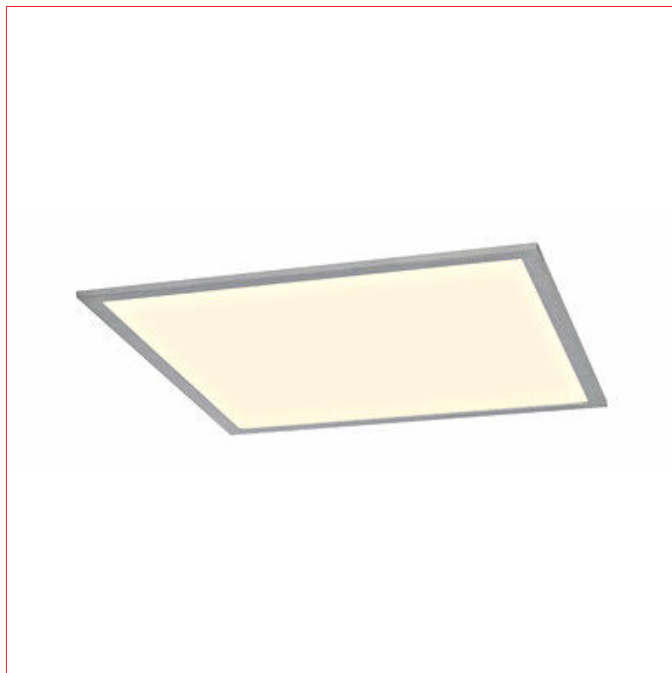


Tehnički podaci

Neto duljina (mm)	595,00
Neto širina (mm)	595,00
Neto visina (mm)	13,00
Neto masa (kg)	3,70
Način montaže	Stropna ugradna
Boja	srebrno-siva
Materijal	Aluminij Acrylic
Proizvođač	03-SLV
Operation current mA (mA)	1050
Temperatura boje (K)	4000
Faktor uzvrata boje	80
Svjetlosni tok (lm)	3650
Životni vijek	30.000h
Klasa zaštite	III
Energetska klasa	A++ A+ A
Ugradna dubina (mm)	50

Tehnički podaci - nastavak

Izvor svj. uklj.	Da
(DxŠxV) mm	595x595x13

Mjerne skice: I-VIDUAL, 4000K, srebrno-sive b., L/W 59.5/59.5 cm

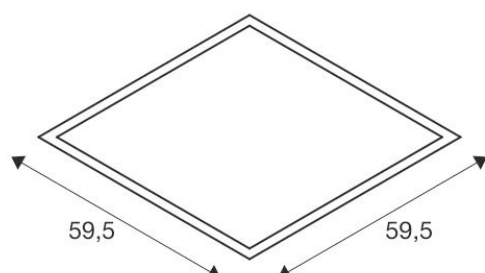

Tablica artikla

OPIS	KAT. BROJ
I-VIDUAL, 4000K, srebrno-sive b., L/W 59.5/59.5 cm	LI158744
LED panel for grid ceilings	
Dodatni pribor	
Univerzalni okvir za LED-Panel, 595x595mm, bijele boje	LI158762
Montažni okvir, srebrno-sive b., L/W 60.5/60.5 cm	LI158764
for I-VIDUAL LED panel	
Rozeta, 10,3cm x 22cm x 5,1cm, bijele boje	LI158791
Ovjesni pribor za LED Panel	LI158799
TCI LED-Driver 50VA, 350-1050mA Dip-Switch, DALI- dim.	LI464032
inkl. Cable relief	
LED-Driver, 40W, 1000mA	LI464170
LED-Driver, 40W, 1000mA, dim.	LI464176