

Tehnički list za artikl: LI43519242

RL-MR16 43 DIM 7,8W 12V 36° 930 500lm 1150cd GU5,3 40000h




Tehnički podaci

Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
Proizvođač	09-Radium
Svjetlosni tok (lm)	500
Candela	1150
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	≥90
Colour stability MacAdam (sdcm)	≤ 6
Životni vijek	40.000h
Dimabilno	Da
IP stupanj zaštite	IP20
Energy efficiency class new from 01.09.2021	G
Energetska klasa	G
Podnožje	GU5,3
Kut svjetlosti (°)	36
Radni napon AC (V)	12
Izvedbeni oblik	PAR16

Tehnički podaci - nastavak

Promjer (mm)	51
Izvedba/tip	Filament
Snaga (W)	7,80
Snaga (W)	7,80
Faktor snage	≥ 0.90

Klasa energetske efikasnosti: RL-MR16 43 DIM 7,8W 12V 36° 930 500lm 1150cd GU5,3 40000h

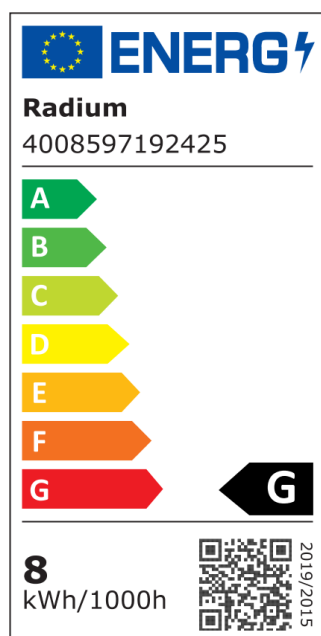

Tablica artikla

OPIS	KAT. BROJ
RL-MR16 43 DIM 7,8W 12V 36° 930 500lm 1150cd GU5,3 40000h	LI43519242