



Tehnički list za artikl: LI99001670

Lano PRO LED 42W, 4000K, 4550lm, mikroprizma, ECG, bb

LED Panel M625 Ra >80, UGR <19, 220-240V, SKII, IP20, aluminium

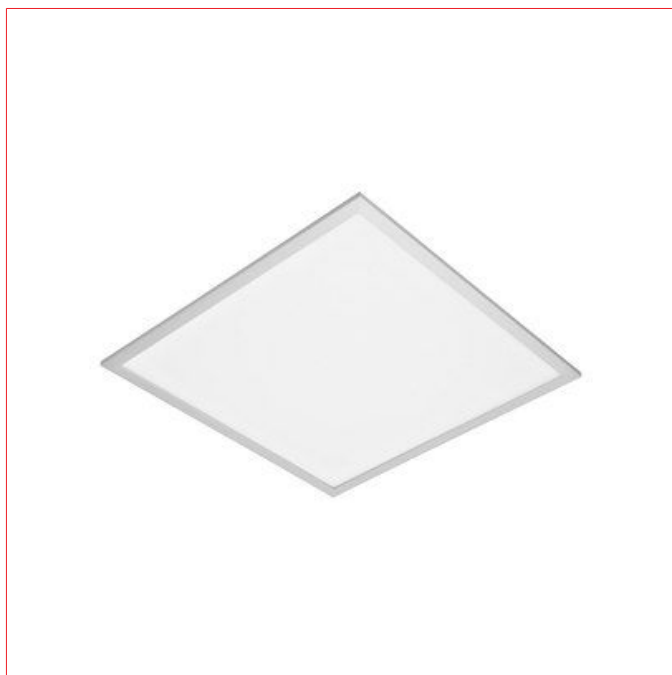


Tehnički podaci

Vrsta svjetiljke	LED Panel
Način montaže	Ugradna za panel stropove
Boja	RAL 9003 (bijela)
Materijal	Aluminij
Pokrov	Mikroprizmatično
Kut svjetlosti (°)	120
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Izvor svjetla	LED
Grlo	LED Platine
Snaga (W)	42
System efficiency (lm/W)	108
Boja svjetla	Neutralno bijela
Temperatura boje (K)	4000

Tehnički podaci - nastavak

Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	4550
Broj svjetiljki	1
Životni vijek (h)	40000
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP20
Energetska klasa	A++ A+ A
Izvor svj. uklj.	Da
(DxŠxV) mm	620x620x10

Mjerne skice: Lano PRO LED 42W, 4000K, 4550lm, mikroprizma, ECG, bb

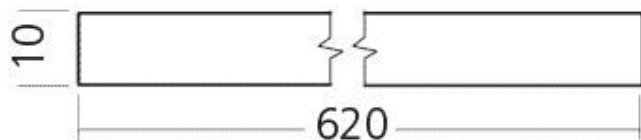

Tablica artikla

OPIS	KAT. BROJ
Lano PRO LED 42W, 4000K, 4550lm, mikroprizma, ECG, bb	
LED Panel M625 Ra >80, UGR <19, 220-240V, SKII, IP20, aluminium	LI99001670