



Tehnički list za artikl: LI99001671

Lano PRO LED 43W, 3000K, 4100lm, mikroprizma, DALI, bb

LED Panel M625, Ra >80, UGR <19, 220-240V, SKII, IP20, aluminium

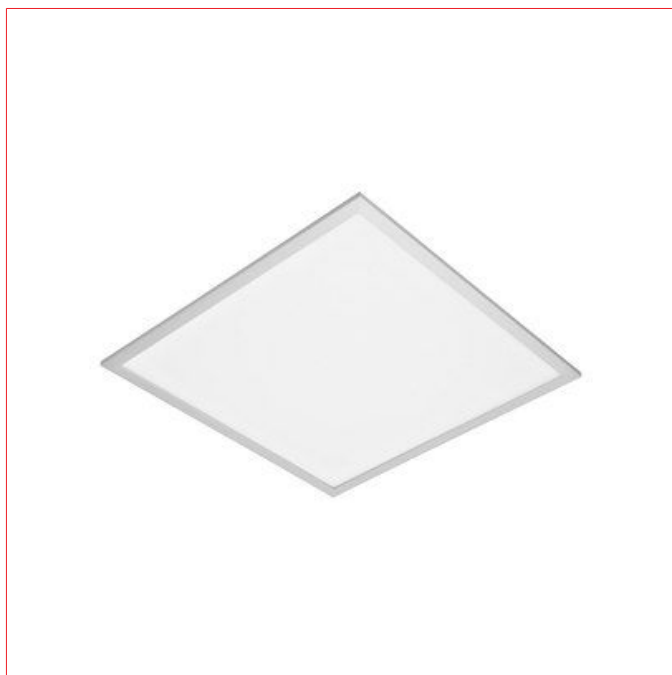


Tehnički podaci

Vrsta svjetiljke	LED Panel
Način montaže	Ugradna za panel stropove
Boja	RAL 9003 (bijela)
Materijal	Aluminij
Pokrov	Mikroprizmatično
Kut svjetlosti (°)	120
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Izvor svjetla	LED
Grlo	LED Platine
Snaga (W)	43
System efficiency (lm/W)	95
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000

Tehnički podaci - nastavak

Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	4100
Broj svjetiljki	1
Životni vijek (h)	40000
Dimabilno	DALI Touch DIM
Klasa zaštite	II
IP stupanj zaštite	IP20
Energetska klasa	A++ A+ A
Izvor svj. uklj.	Da
(DxŠxV) mm	620x620x10

Mjerne skice: Lano PRO LED 43W, 3000K, 4100lm, mikroprizma, DALI, bb

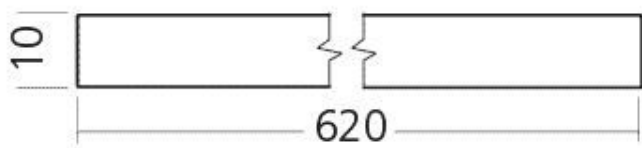

Tablica artikla

OPIS	KAT. BROJ
Lano PRO LED 43W, 3000K, 4100lm, mikroprizma, DALI, bb	
LED Panel M625, Ra >80, UGR <19, 220-240V, SKII, IP20, aluminium	LI99001671