


Tehnički list za artikl: LID13268--

Ina-F PAR16 Spot, GU10, 50W, IP20, aluminij €CONOMY

Recessed spotlight




Tehnički podaci

Dimabilno	Ovisno o izvoru svjetla Da
Klasa zaštite	I
IP stupanj zaštite	IP20
Vrsta svjetiljke	downlight
Izvor svjetla	LED Retrofit MR16
Izvor svj. uklj.	Ne
Broj svjetiljki	1
Grlo	GU10
Snaga (W)	10
Radni napon AC (V)	100-240
Frekvencija (Hz)	50/60
Način montaže	Stropna ugradna

Tehnički podaci - nastavak

Otvor (mm)	Ø78
Ugradna dubina (mm)	150
Boja	aluminij
Materijal	Aluminij
Visina (mm)	120
Promjer (mm)	93
Dodatni pribor	LID 17278--; LID 17279--; LID 17203--; LID 13226--; LID 14508--; LID 15671--; LID 16949--; LID 16223--; LID 13106--
Potrebni pribor	LID 14882--; LID 13226--
ØxV mm	93x120
OTVOR mm	Ø78

Mjerne skice: Ina-F PAR16 Spot, GU10, 50W, IP20, aluminij

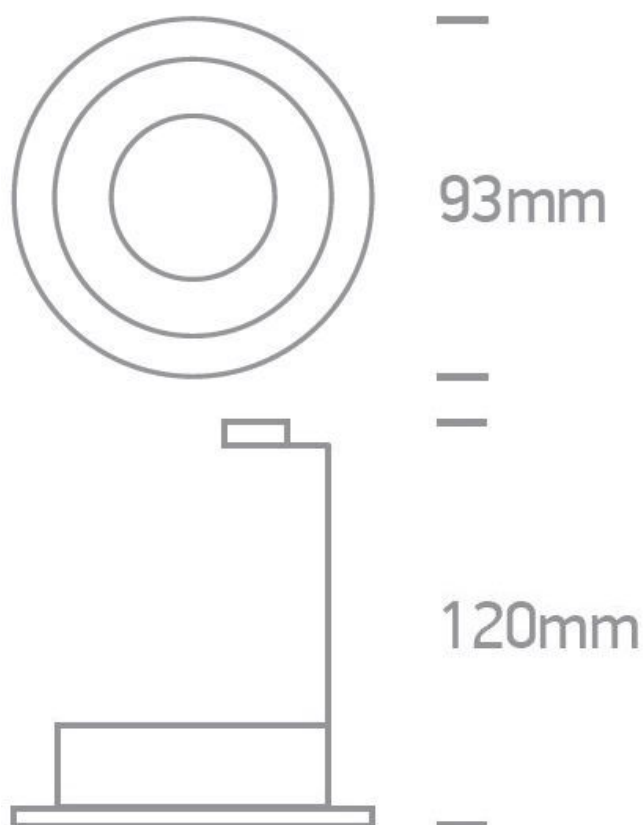

Tablica artikla

OPIS	KAT. BROJ
Ina-F PAR16 Spot, GU10, 50W, IP20, aluminij Recessed spotlight	LID13268
Potrebni pribor	
LED 7W MR16 GU10 500lm 3000K 36° 230V CRI97 CRI97	LID14882
COB LED GU10, 6W, 3000K, 500lm, 60°, 230V	LID13226
Dodatni pribor	
LED 5W GU10 500lm 3000K CRI80 IP44 230V 38° Suitable for high ambient temperature enclosed fittings	LID17278
LED 5W GU10 500lm 3000K CRI80 IP44 230V 38° dimabilna Suitable for high ambient temperature enclosed luminaires	LID17279
LED 4W 300lm 3000K GU10 60° CRI90 TRIAC dimabilna 230V EM 3h	LID17203
COB LED GU10, 6W, 3000K, 500lm, 60°, 230V	LID13226
LED žarulja MR16, 6W, GU10, 3000K, 500lm, 230V, 60°, dimabilna dimabilna	LID14508
LED GU10 MR16 6W 500lm 3000K 60° 230V crne boje Reflector lamp	LID15671
Konektor 32A 2x3-port	LID16949
EM driver 3H MR16 LED modul 3W 3 230V IP20 0	LID16223
Panik modul za GU10 LED 3-8,5W 3h This kit will also operate with GU10 LED lamps suitable for 180V DC power supply (Emergency)	LID13106