



Tehnički list za artikl: LID16586--

Rea LED 10W 1100lm 3000K Ra90 IP54 crne boje

nadgradna stropna svjetiljka

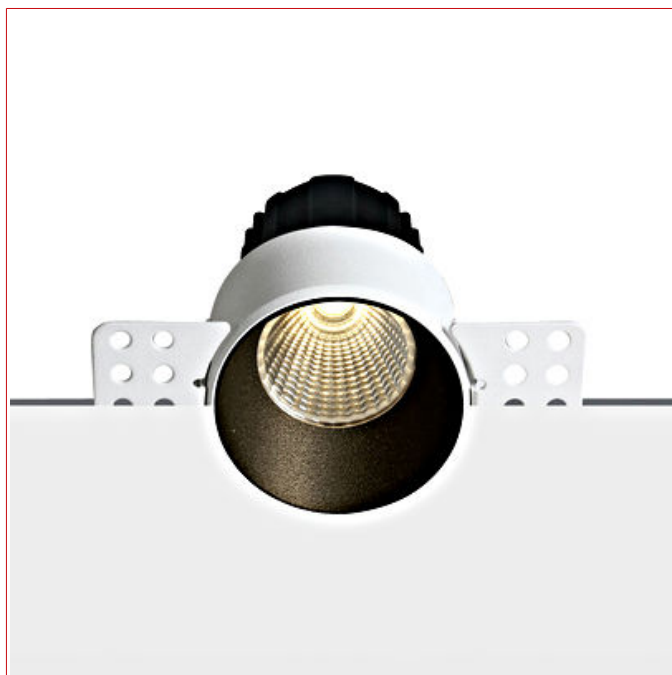

Info o proizvodu

12W COB LED 2-Step trimless Recessed spot, IP20, for general application. Requires 500mA/700mA constant current driver. Complies with standard EN60598-1 and any other specific standards.

Tehnički podaci


Svjetlosni tok (lm)	1100
Boja svjetla	Toplo bijela
Temperatura boje (K)	3000
Faktor uzvrata boje	≥90
Dimabilno	Ovisno o driveru Da
Klasa zaštite	III
IP stupanj zaštite	IP20
Vrsta svjetiljke	Stropne ugradne svjetiljke
Izvor svj. uklj.	Da
Grlo	LED Platine
Kut svjetlosti (°)	40
Efikasnost sustava (lm/W)	91

Tehnički podaci - nastavak

Snaga (W)	12
Pogonski uređaj	Needs to be ordered separately
Pogonska struja mA (mA)	500/700
Ulazna struja (A)	0,5/0,7
Način montaže	Stropna ugradna
Otvor (mm)	Ø 70
Ugradna dubina (mm)	110
Boja	crna
Materijal	Aluminij
Visina (mm)	92
Promjer (mm)	64
Dodatni pribor	LID16949--
Potrebni pribor	LID13081--;
ØxV mm	64x92
OTVOR mm	Ø 70

Mjerne skice: Rea LED 10W 1100lm 3000K Ra90 IP54 crne boje

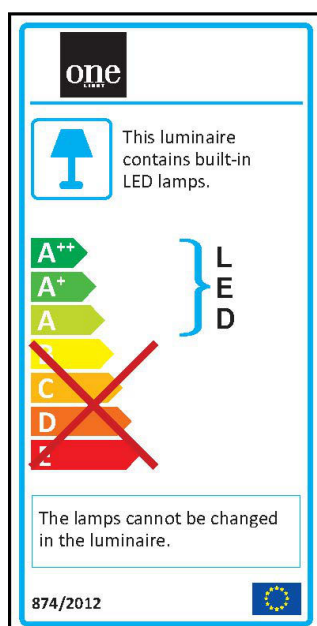

Klasa energetske efikasnosti: Rea LED 10W 1100lm 3000K Ra90 IP54 crne boje

Tablica artikla

OPIS	KAT. BROJ
Rea LED 10W 1100lm 3000K Ra90 IP54 crne boje nadgradna stropna svjetiljka	LID16586
Potrebni pribor	
LED Driver 700mA, 7-15W, ulaz 220-240V 23 DRIVERS	LID13081
Dodatni pribor	
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949