


Tehnički list za artikl: LID17291--

Kor-L 40W 3600-4000lm 3000-5700K CRI80 UGR19 IP20 230V

BACKLIT, uključen 1000mA driver

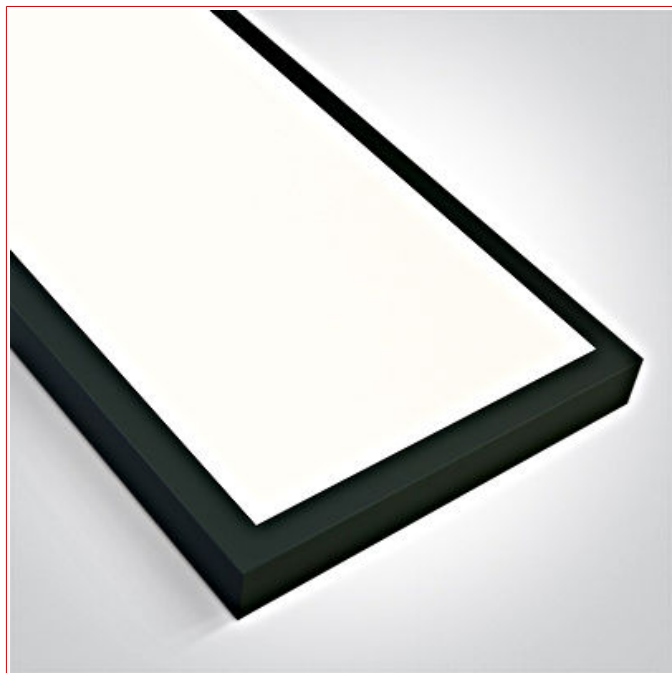

Info o proizvodu

30x120cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser. Uniform lighting, ideal for commercial applications. Complete with 1000mA driver. Complies with standard EN60598-1 and any other specific standards.

Tehnički podaci

Svjetlosni tok (lm)	3600/4000/3800
Boja svjetla	Hladno bijela Dnevna Toplo bijela
Temperatura boje (K)	3000;4000;5700
Faktor uzvrata boje	≥80
Faktor odsjaja (UGR)	<19
Životni vijek	50.000h
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP20
Izvor svj. uklj.	Da

Tehnički podaci - nastavak

Grlo	LED Platine
Efikasnost sustava (lm/W)	90
Snaga (W)	40
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Ulazni napon AC (V)	220-240
Pogonska struja mA (mA)	1000
Frekvencija (Hz)	50/60
Način montaže	Stropna nadgradna
Boja	crna
Materijal	Čelik Aluminij
Duljina (mm)	1200
Širina (mm)	300
Visina (mm)	42
Dodatni pribor	LID 16949--
(DxŠxV) mm	1200x300x42

Tablica artikla

OPIS	KAT. BROJ
Kor-L 40W 3600-4000lm 3000-5700K CRI80 UGR19 IP20 230V BACKLIT, uključen 1000mA driver	LID17291
Dodatni pribor	
Konektor 32A 2x3-port 26 ACCES&GADGETS	LID16949