

Tehnički list za artikl: LID17444--

Sutil Round2 LED 30W 3300lm 3K/4K/5,7K IP20 230V 120° bijela

Ugradna svjetiljka, komplet s driverom



Info o proizvodu

CCT Variable 30W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms. Supplied with 800mA non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Tehnički podaci

Neto visina (mm)	22,00
Neto promjer (mm)	295,00
Vrsta svjetiljke	Stropne ugradne svjetiljke
Boja	bijela
Materijal	Akril Aluminij tlačni lijev
Pokrov	Akril
Kut svjetlosti (°)	120
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Ulazni napon AC (V)	220-240
Pogonska struja mA (mA)	800
Ulazna struja (A)	0,80

Tehnički podaci - nastavak

Grlo	LED Platine
Efikasnost sustava (lm/W)	110
Snaga (W)	30
Boja svjetla	Hladno bijela Neutralno bijela Toplo bijela
Temperatura boje (K)	4000 3000 5700
Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	3300
Životni vijek	36.000h / L70 / B50
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP20
Ugradna dubina (mm)	50
Izvor svj. uklj.	Da
Promjer (mm)	295
ØxV mm	295x22
Otvor (mm)	Ø 285
OTVOR mm	Ø 285

Mjerne skice: Sutil Round2 LED 30W 3300lm 3K/4K/5,7K IP20 230V 120° bijela

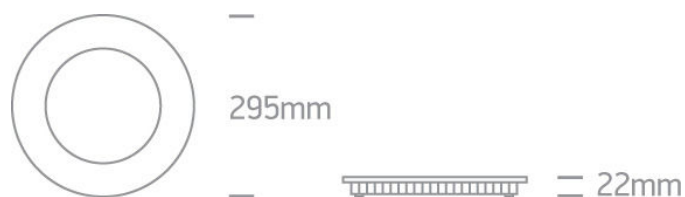

OPIS	KAT. BROJ
Sutil Round2 LED 30W 3300lm 3K/4K/5,7K IP20 230V 120° bijela	LID17444
Ugradna svjetiljka, komplet s driverom	