

Tehnički list za artikl: LID17446--

Sutil Quadro2 LED 16W 1600lm 3K/4K/5,7K IP20 230V 120° bije.

Komplet s driverom



Info o proizvodu

CCT Variable 16W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms. Supplied with 400mA non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Tehnički podaci

Neto duljina (mm)	173,00
Neto širina (mm)	173,00
Neto visina (mm)	22,00
Vrsta svjetiljke	Stropne ugradne svjetiljke
Boja	bijela
Materijal	Akril Aluminij tlačni lijev
Pokrov	Akril
Kut svjetlosti (°)	120
Pogonski uređaj	LED Driver
Radni napon AC (V)	220-240
Ulazni napon AC (V)	220-240
Pogonska struja mA (mA)	400

Tehnički podaci - nastavak

Ulazna struja (A)	0,40
Grlo	LED Platine
Efikasnost sustava (lm/W)	100
Snaga (W)	16
Boja svjetla	Hladno bijela Neutralno bijela Toplo bijela
Temperatura boje (K)	4000 3000 5700
Faktor uzvrata boje	≥80
Svjetlosni tok (lm)	1600
Životni vijek	36.000h / L70 / B50
Dimabilno	Ne
Klasa zaštite	II
IP stupanj zaštite	IP20
Ugradna dubina (mm)	50
Izvor svj. uklj.	Da
(DxŠxV) mm	173x173x22
Otvor (mm)	155x155
OTVOR mm	155x155

Mjerne skice: Sutil Quadro2 LED 16W 1600lm 3K/4K/5,7K IP20 230V 120° bije.

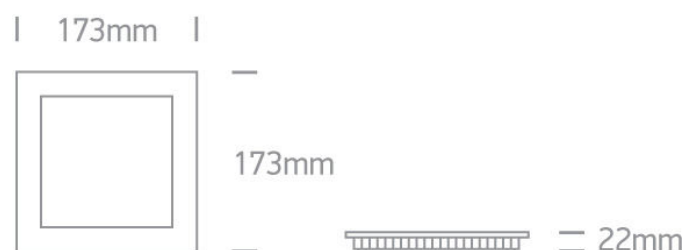

OPIS	KAT. BROJ
Sutil Quadro2 LED 16W 1600lm 3K/4K/5,7K IP20 230V 120° bije. Komplet s driverom	LID17446